

# GFRG Access Doors


## FOR DRYWALL CEILINGS



### FG - Glass Fiber Reinforced Gypsum

Karp's FG glass fiber reinforced gypsum access doors provide unobstructed access and satisfy upscale design installation requirements by blending seamlessly into drywall ceilings.

- Perfect for retail
- A great commercial solution
- Meets design needs for hospitality

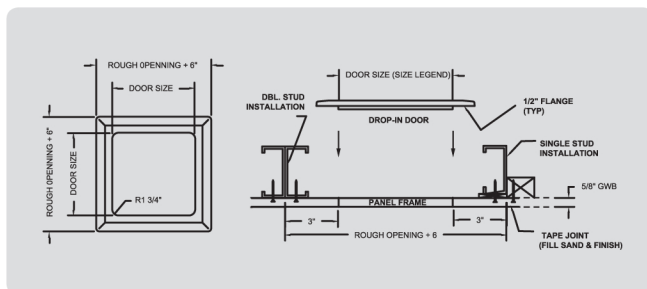

Drop-in Access Panel—  
Typical Panel Elevations

Drop-in Access Panel—Side view  
(single/double stud installation)

DOOR SIZE (H X W)	CEILING OPENING	WEIGHT PER DOOR (LBS)
9" x 9"	15" x 15"	6 lbs
12" x 12"	18" x 18"	9 lbs
16" x 16"	22" x 22"	10 lbs
18" x 18"	24" x 24"	11 lbs
24" x 24"	30" x 30"	16 lbs

Hinge FG door available for custom orders.  
Special sizes and modifications available on request.

# Acoustical Doors

## NOISE RESISTANT



### STC Acoustical Access Door

The STC Acoustical Door is a high-quality, galvanized steel door fabricated with 5/8" thick acoustical tile, which provides a noise reduction coefficient (NRC) of .055. The 3/8" x 1/8" closed cell neoprene gasketing additionally contributes to the door's noise reduction capability.

<b>MATERIAL</b>	18 ga. galvanized steel 1" wide trim 5/8" acoustical tile 3/8" x 1/8" closed cell neoprene gasket
<b>HINGE TYPE</b>	Continuous piano hinge
<b>LATCH TYPE</b>	Lift and turn compression latch
<b>FINISH</b>	Prime coat of rust inhibitive electrostatic powder, painted white or stainless steel with No. 4 finish

