

A close-up photograph of a silver keypad lock mounted on a door handle. The keypad has buttons for numbers 1-9, 0, *, and #. The lock is set against a dark background, and a red graphic overlay is on the right side of the image.

34K SERIES

STANDALONE CYLINDRICAL LOCK

One Family. One Brand. One Vision.™
www.hagerco.com

Headliners

- Dependable lockset with anti-vandal free-wheeling lever mechanism
- Up to 500 total access codes available to be categorized as User, Service User, or Manager
- Keypad programmable - no software or gateway necessary
- Purchasing audit trail software package allows programming to be transferred to locks via laptop. Software also grants access to audit trail features.

Features

- Non-handed design
- All metal pushbutton keypad, ADA compliant
- Mechanical key override
- Weatherproof design (-31 F to 151 F) with two gaskets supplied standard
- 34K2 model uses 26 bit 125kHz Wiegand HID proximity cards; 500 card users available
- Real time clock (RTC)
- Quick passage mode available without being in programming mode
- Individual, group or total lockout codes available
- Low battery alert
- Adjustable volume
- Audible Keystroke option
- Four AA alkaline batteries provided; 30,000 cycle battery life
- 9V external power supported

Applications

- Assisted Living Facilities
- Multi-Family
- Retail Buildings
- Office Buildings
- Airports
- Schools
- Healthcare
- Retrofit applications where hardwiring is not practical

Models

34K1	Keypad - Storeroom
34K2	Keypad + Prox - Storeroom



Mechanical Specifications

Door	1-3/8" (35mm) - 2" (51mm)
Thickness:	
Backset:	2-3/4" (70mm)
Latchbolt:	1/2" (13mm) throw, stainless steel 1-1/8" x 2-1/4" (29mm x 57mm) square faceplate – standard 3/4" Anti-Friction latchbolt available for pairs of fire doors
Strike:	1-1/4" x 4-7/8" (32mm x 124mm) ASA Strike – standard 1-1/8" x 2-1/4" (29mm x 57mm) Tee Strike – optional
Finishes:	US26D and US10B
Door Prep:	Standard ANSI A115 Prep, modified by adding four additional thru-bolt holes
Certifications:	ANSI A156.02 Grade 1 Compliant ANSI A156.25 Compliant UL Listed up to 3 hours for "A" labeled doors UL10C Positive Pressure Rated ADA Compliant FCC Compliant
Cylinders/ Cores:	Brass 6-Pin, keyed different – Schlage C keyway – Standard Cylinder drilled 6-Pin, Keyed 5-Pin – Standard Small Format Interchangeable Core Option available 6-Pin and 7-Pin SFIC cores sold separately
Warranty:	Two-year warranty on mechanical and electrical components One-year warranty on finish

Additional Electronic Features & Specifications

- Access codes must be 4-8 digits
- Relocking delay - Adjustable from 2 to 99 seconds
- Temporary keypad lockout (based on failed entry attempts)
- Tamper attempt alarm (alarm sounds after certain amount of failed attempts)
- Audit trail features can be downloaded from the lock with the purchase of 34K1 (2-639-6000) or 34K2 (2-639-6001) software kits
- Audit trail provides last 2,000 events
- Dual credential option available on 34K2
- Fuzzy credential entry available

System Requirements

- Microsoft Windows based operating system (XP up to and including Windows 10)
- CD Rom drive

Note: Laptop required to transfer or download data at the door.

34K Series — Standalone Cylindrical Lock

Lever Styles




Withnell



Archer



August

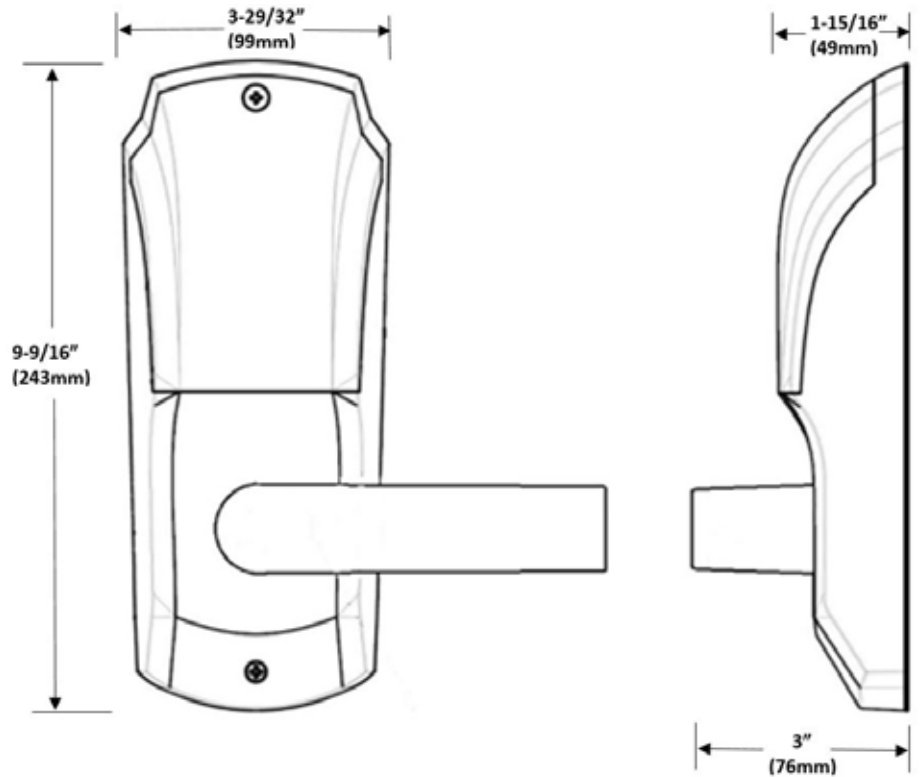

Audit Trail Accessories



2-639-6000 – 34K1 Software Kit

Includes 34K1 Software Disc, USB cable and Programming manual

2-639-6001 – 34K2 Software Kit

Includes 34K2 Software Disc, Prox card reader, USB cable and Programming manual

34K Series — How to Order

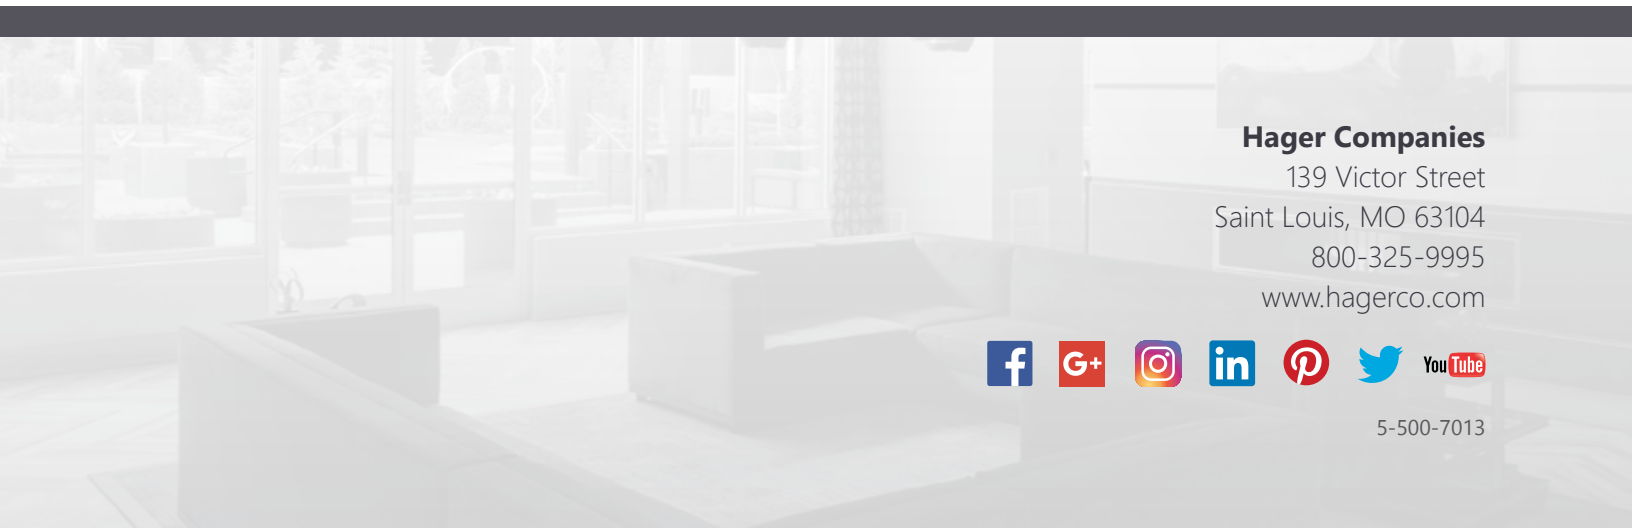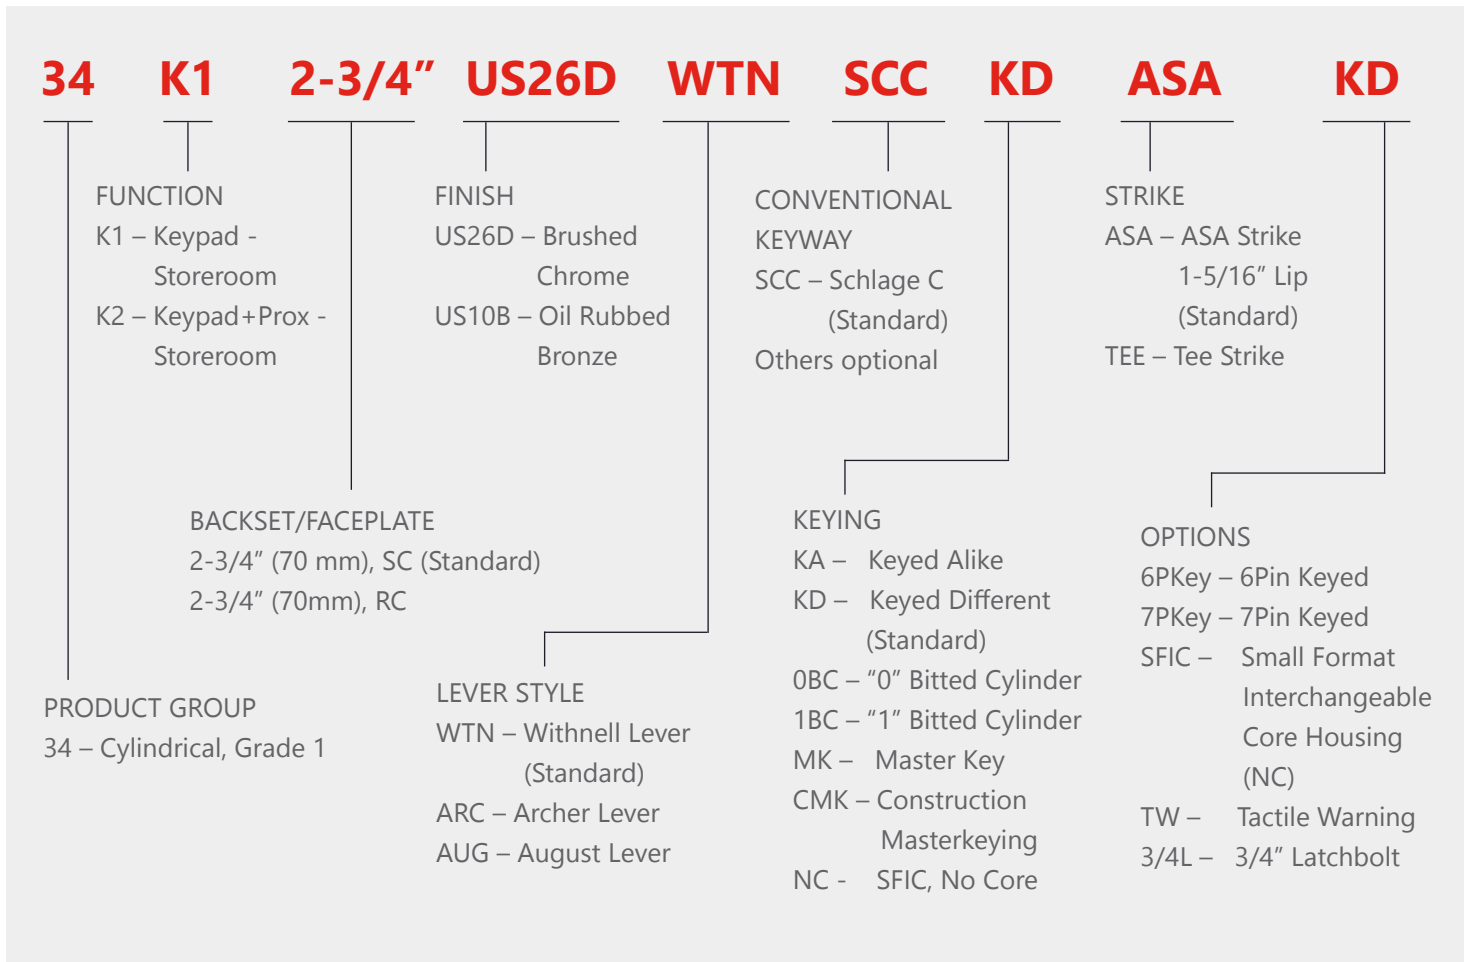

Hager Companies

139 Victor Street
 Saint Louis, MO 63104
 800-325-9995
 www.hagerco.com



5-500-7013