


# PlastiSert Press-Fit Flanged-Top Slot

		REVISIONS			
ZONE	REV.	DESCRIPTION	DATE	APPROVED	

Diameter Thread Pitch

8-32

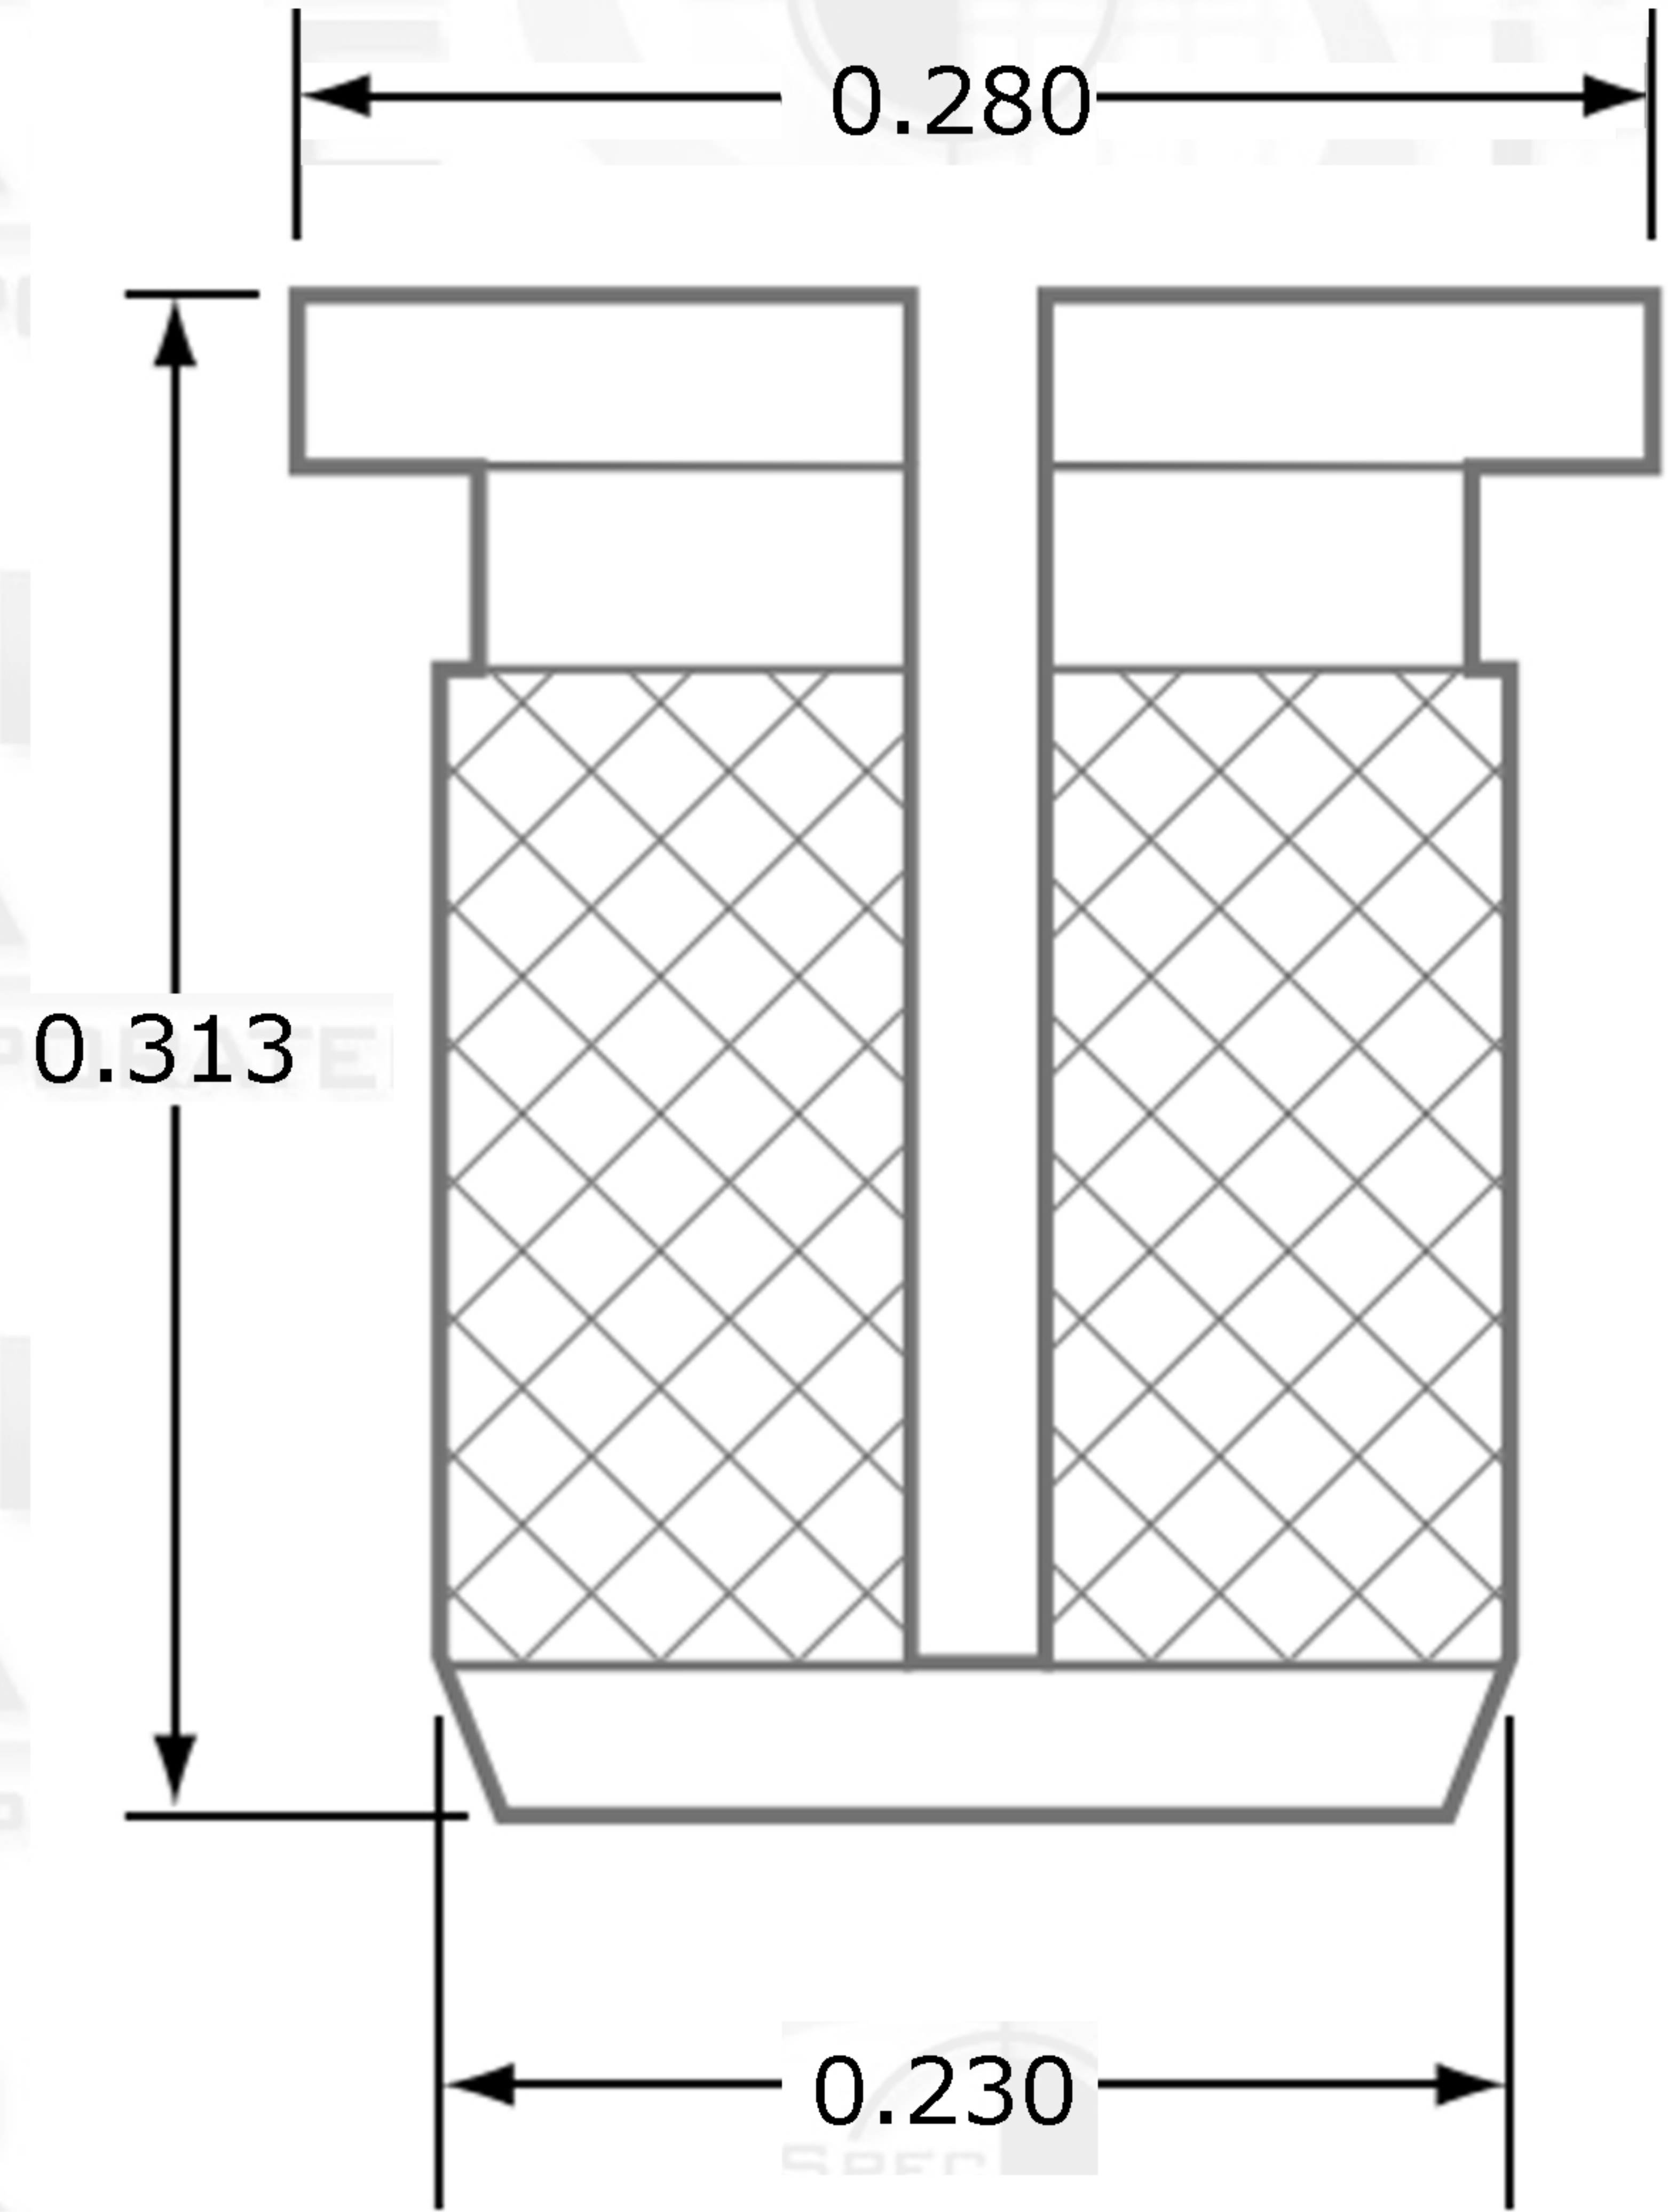

Suggested Drill Bit Size



0.2188 (7/32)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
				DRAWN	
				CHECKED	
				ENG APPR.	
				MFG APPR.	
				Q.A.	
				COMMENTS:	
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME			
	35L5C-F98U-08-1J	ACRONYM:UNC			
		ROTATION:Right-Hand			
		MATERIAL FINISH			
		Brass			
		PART NUMBER			
		DO NOT SCALE DRAWING			



**17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1