


# PlastiSert Press-Fit Flush Bottom Slot

ZONE		REV.	REVISIONS	DATE	APPROVED
			DESCRIPTION		




Diameter Thread Pitch

8-32

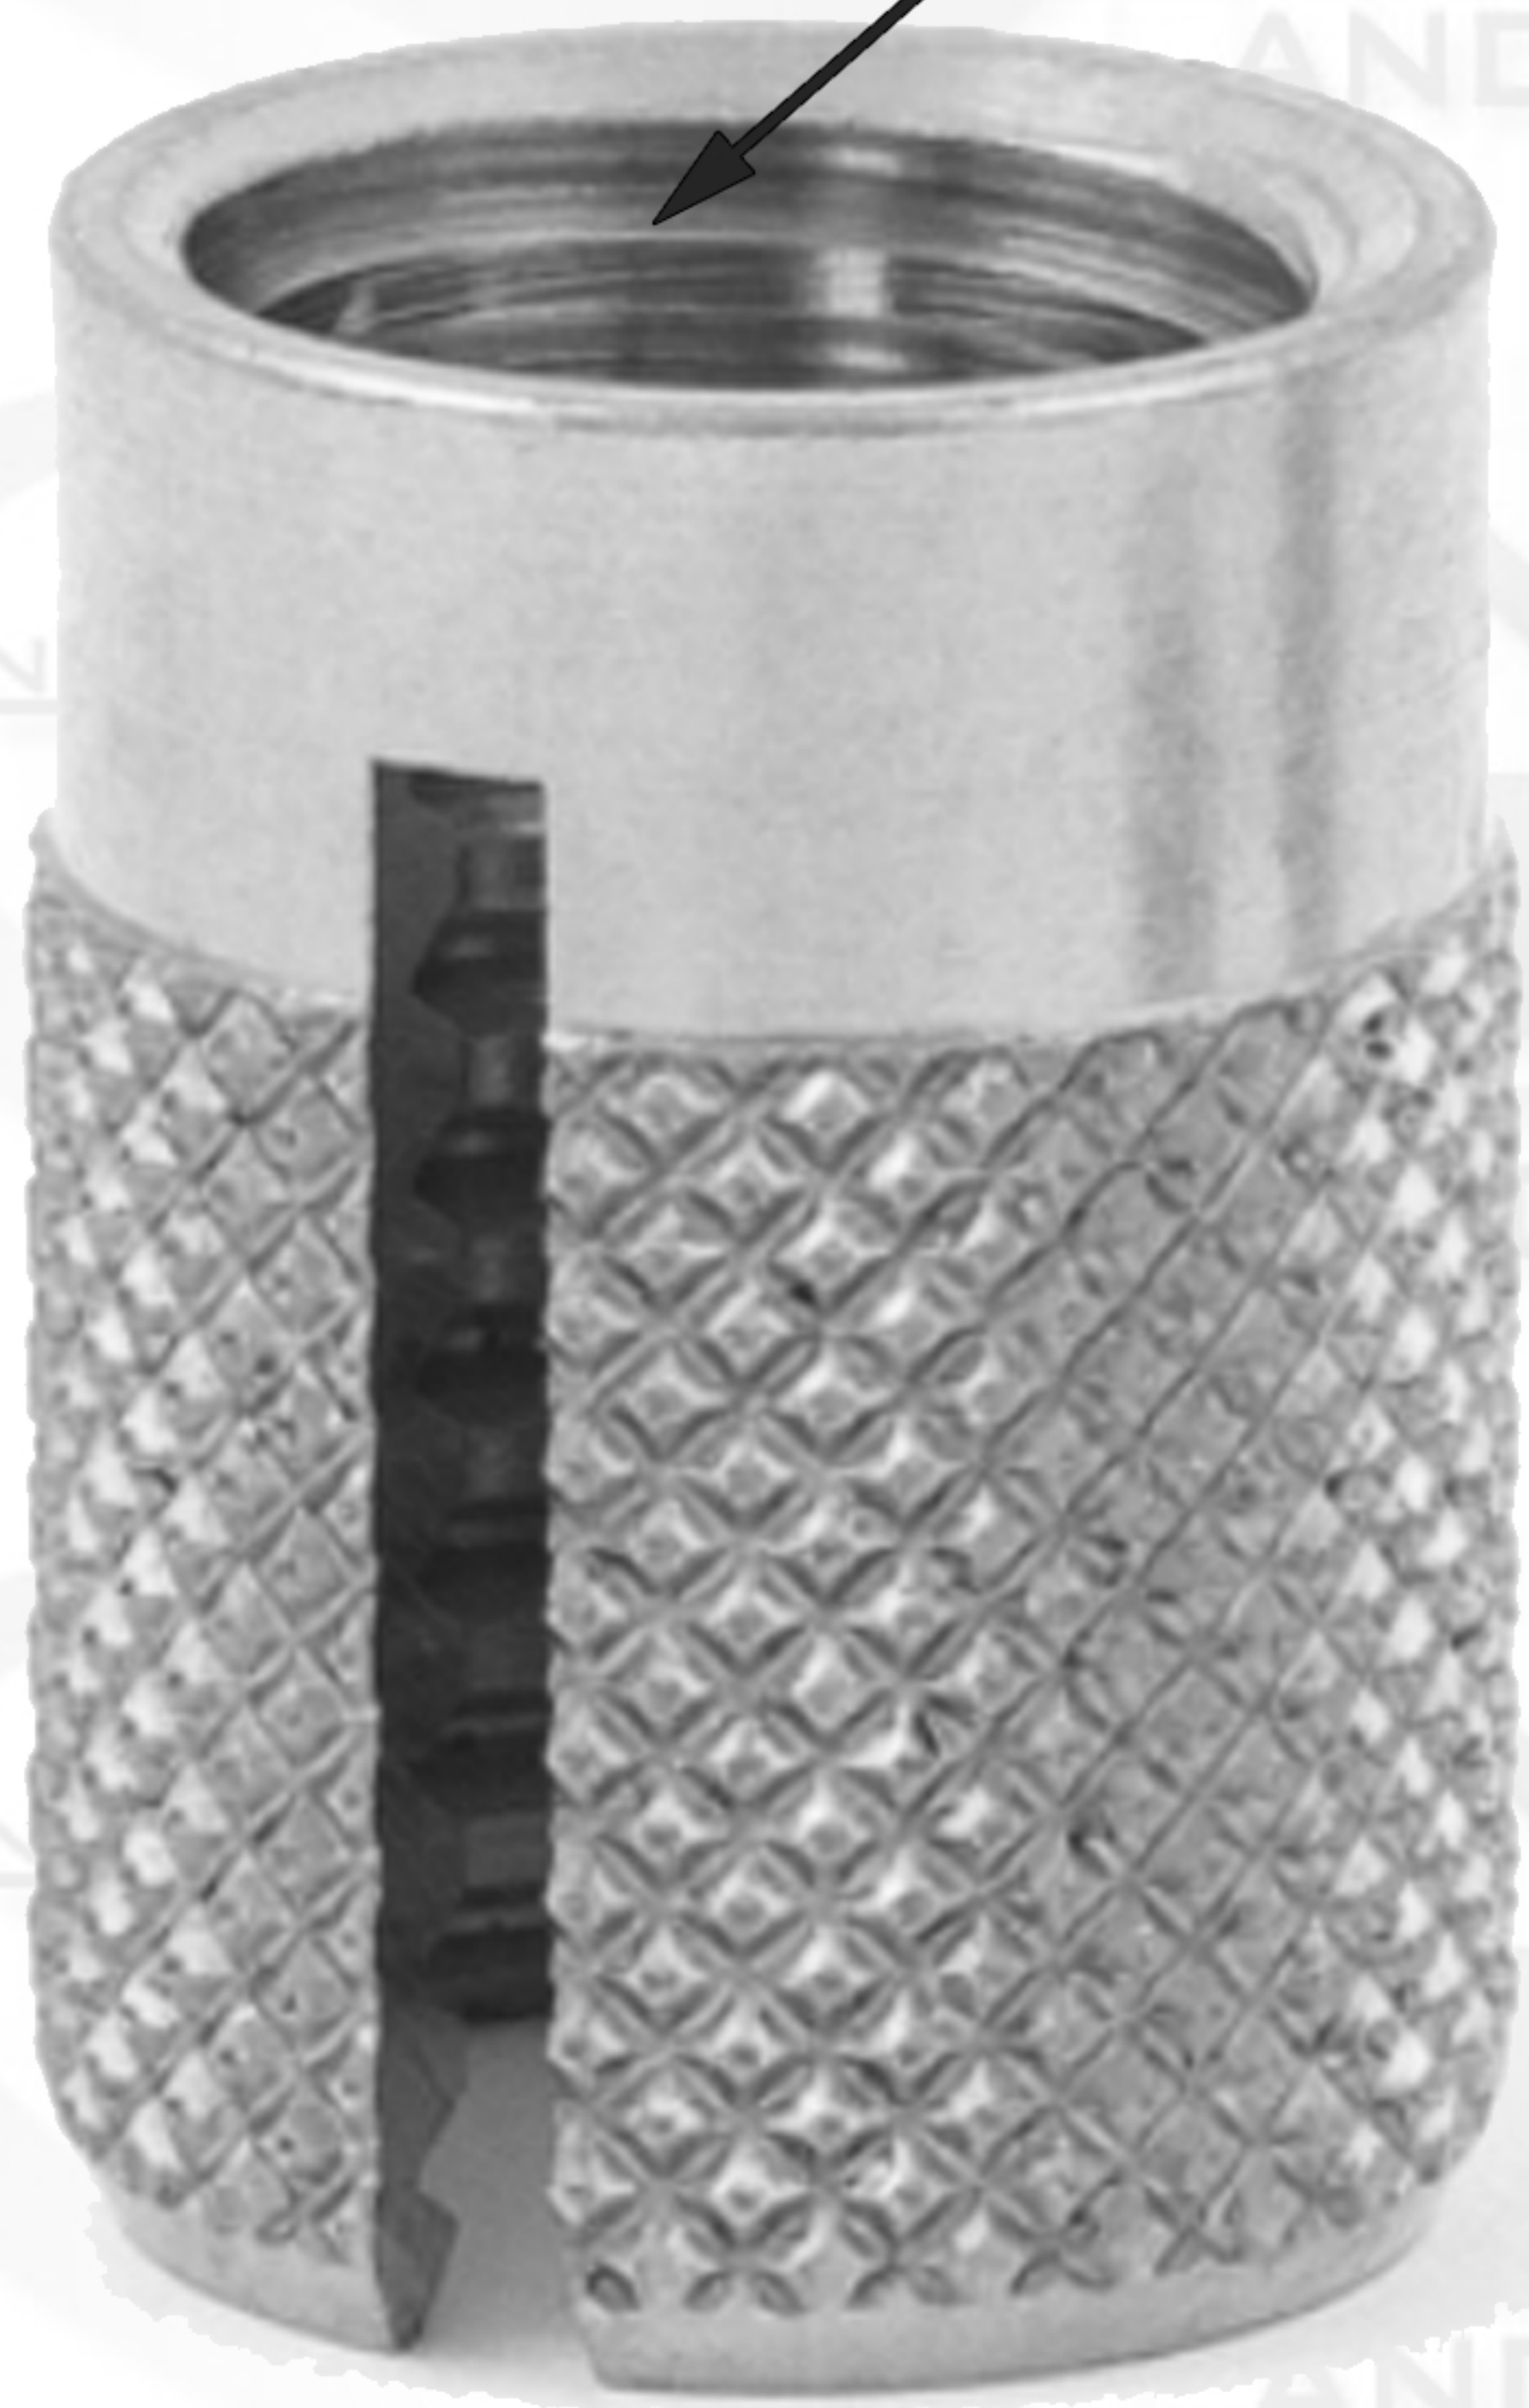

0.250

0.218

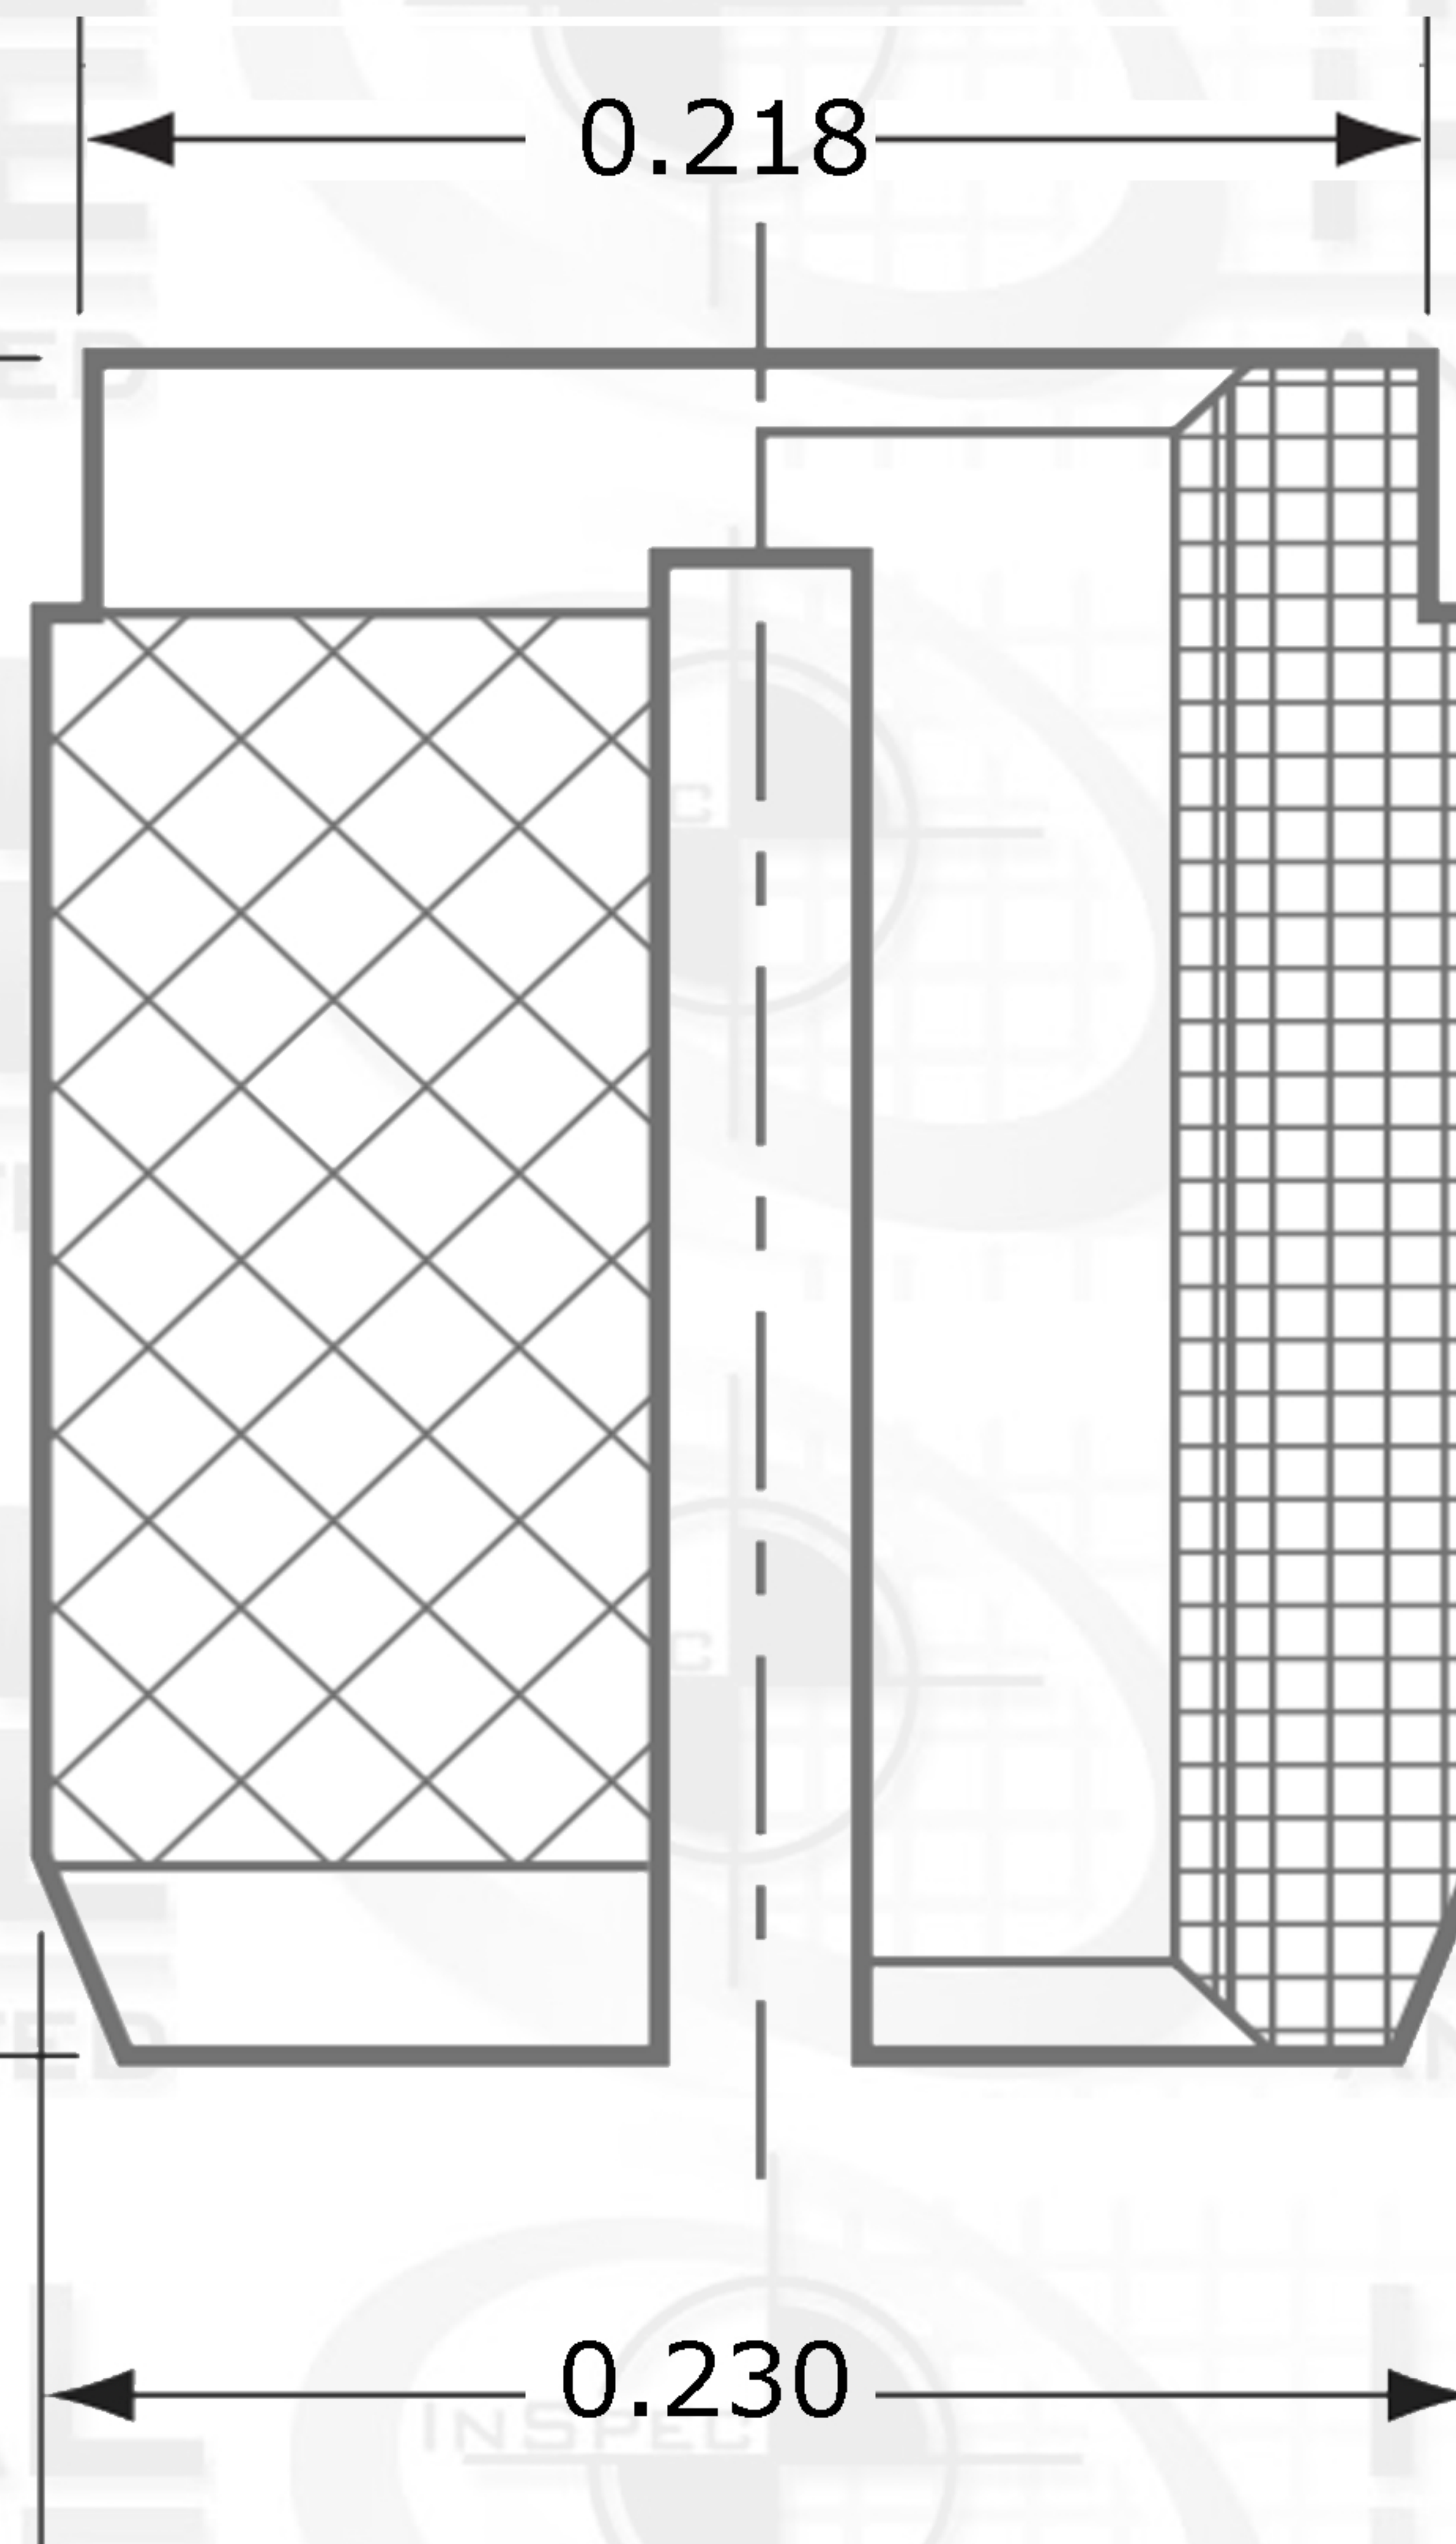

Suggested Drill Bit Size



0.2188 (7/32)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND ITS CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES, INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES, INC. IS STRICTLY PROHIBITED.

		NAME	DATE
		DRAWN	
		CHECKED	
		ENG APPR.	
		MFG APPR.	
		Q.A.	
		COMMENTS:	

TH. STANDARD: ANSI/ASME	
ACRONYM: UNC	
ROTATION: Right-Hand	
MATERIAL FINISH	
Brass	
PART NUMBER	
35L5C-GU3A-0825-1J	
NEXT ASSY USED ON	
APPLICATION	DO NOT SCALE DRAWING



**17-B KENTUCKY AVENUE**  
**PATERSON, NEW JERSEY 07503**  
**TEL: 973-684-4010 FAX: 973-684-3095**  
**email: TechSupport@industrialhardware.com**  
**www.industrialhardware.com**

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE: 1:8	WEIGHT:	SHEET 1 OF 1