# PlastiSert Press-Fit Flush Bottom Slot

| ZONE | REV. | REVISIONS DESCRIPTION | DATE | APPROVED |
|---|---|---|---|---|
| | | | | |
| | | | | |

Diameter Thread Pitch

1/4-20

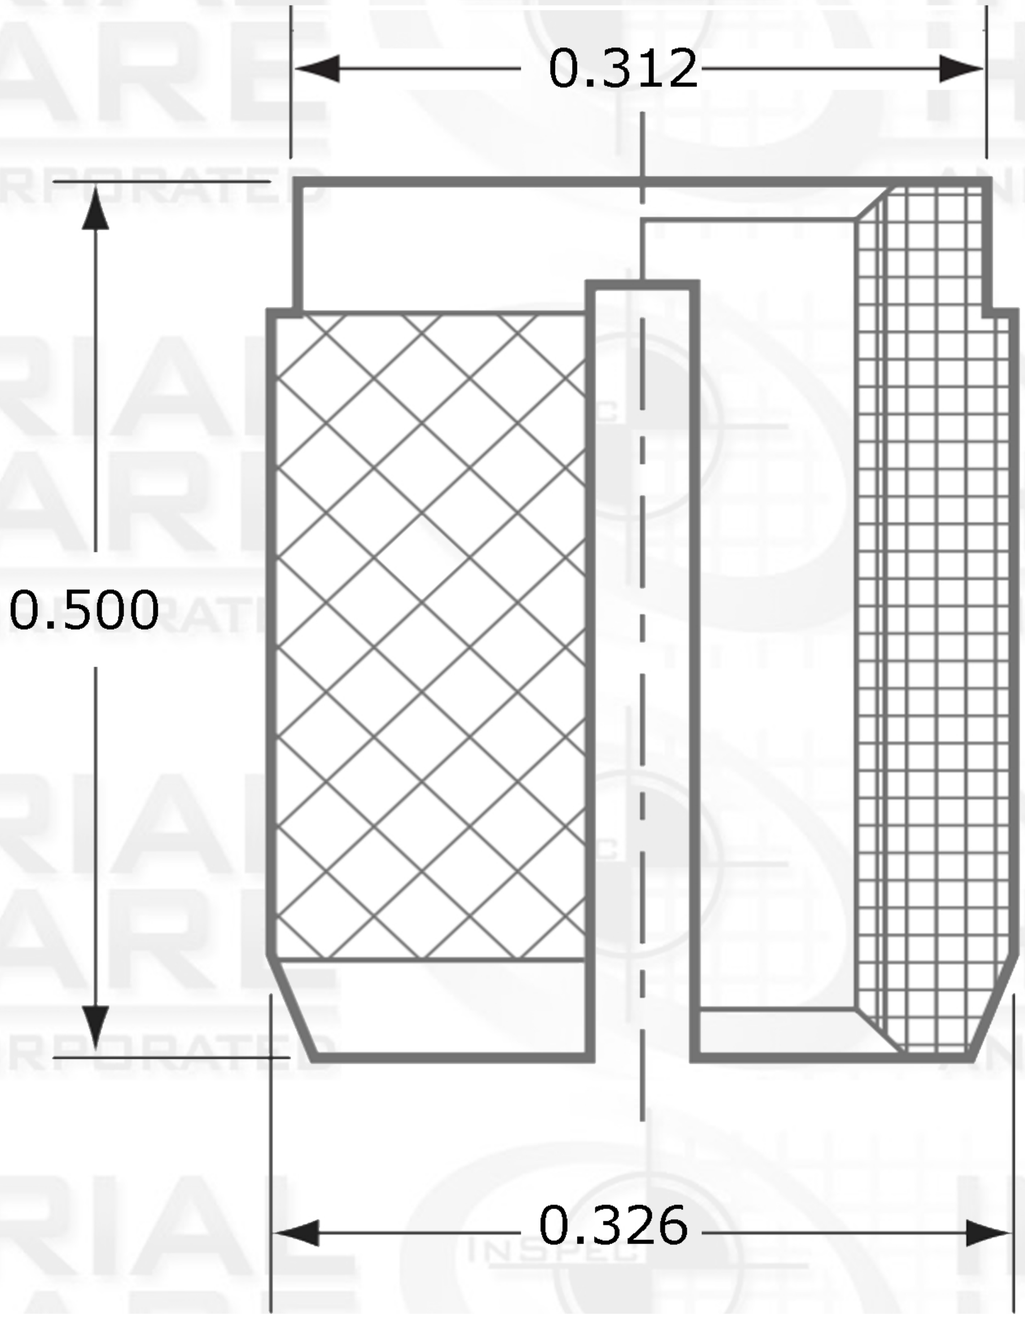


Suggested Drill Bit Size

0.3125 (5/16)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

| NEXT ASSY | USED ON |
|---|---|
| | |

APPLICATION

TH. STANDARD: ANSI/ASME
ACRONYM: UNC
ROTATION: Right-Hand

MATERIAL FINISH
Brass

PART NUMBER
35L5C-GU3A-25-0T

DO NOT SCALE DRAWING

| | NAME | DATE |
|---|---|---|
| DRAWN | | |
| CHECKED | | |
| ENG APPR. | | |
| MFG APPR. | | |
| Q.A. | | |

COMMENTS:

INDUSTRIAL HARDWARE AND SPECIALTIES INCORPORATED
17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

| SIZE | DWG. NO. | REV. |
|---|---|---|
| A | | |

SCALE:1:8 WEIGHT: SHEET 1 OF 1