

# Knife-Thread Flush Slotted

Diameter Thread Pitch

10-24



Suggested Drill Bit Size

0.3750 (3/8)




ZONE		REV.	REVISIONS	DATE	APPROVED
			DESCRIPTION		

0.5

0.453

0.375

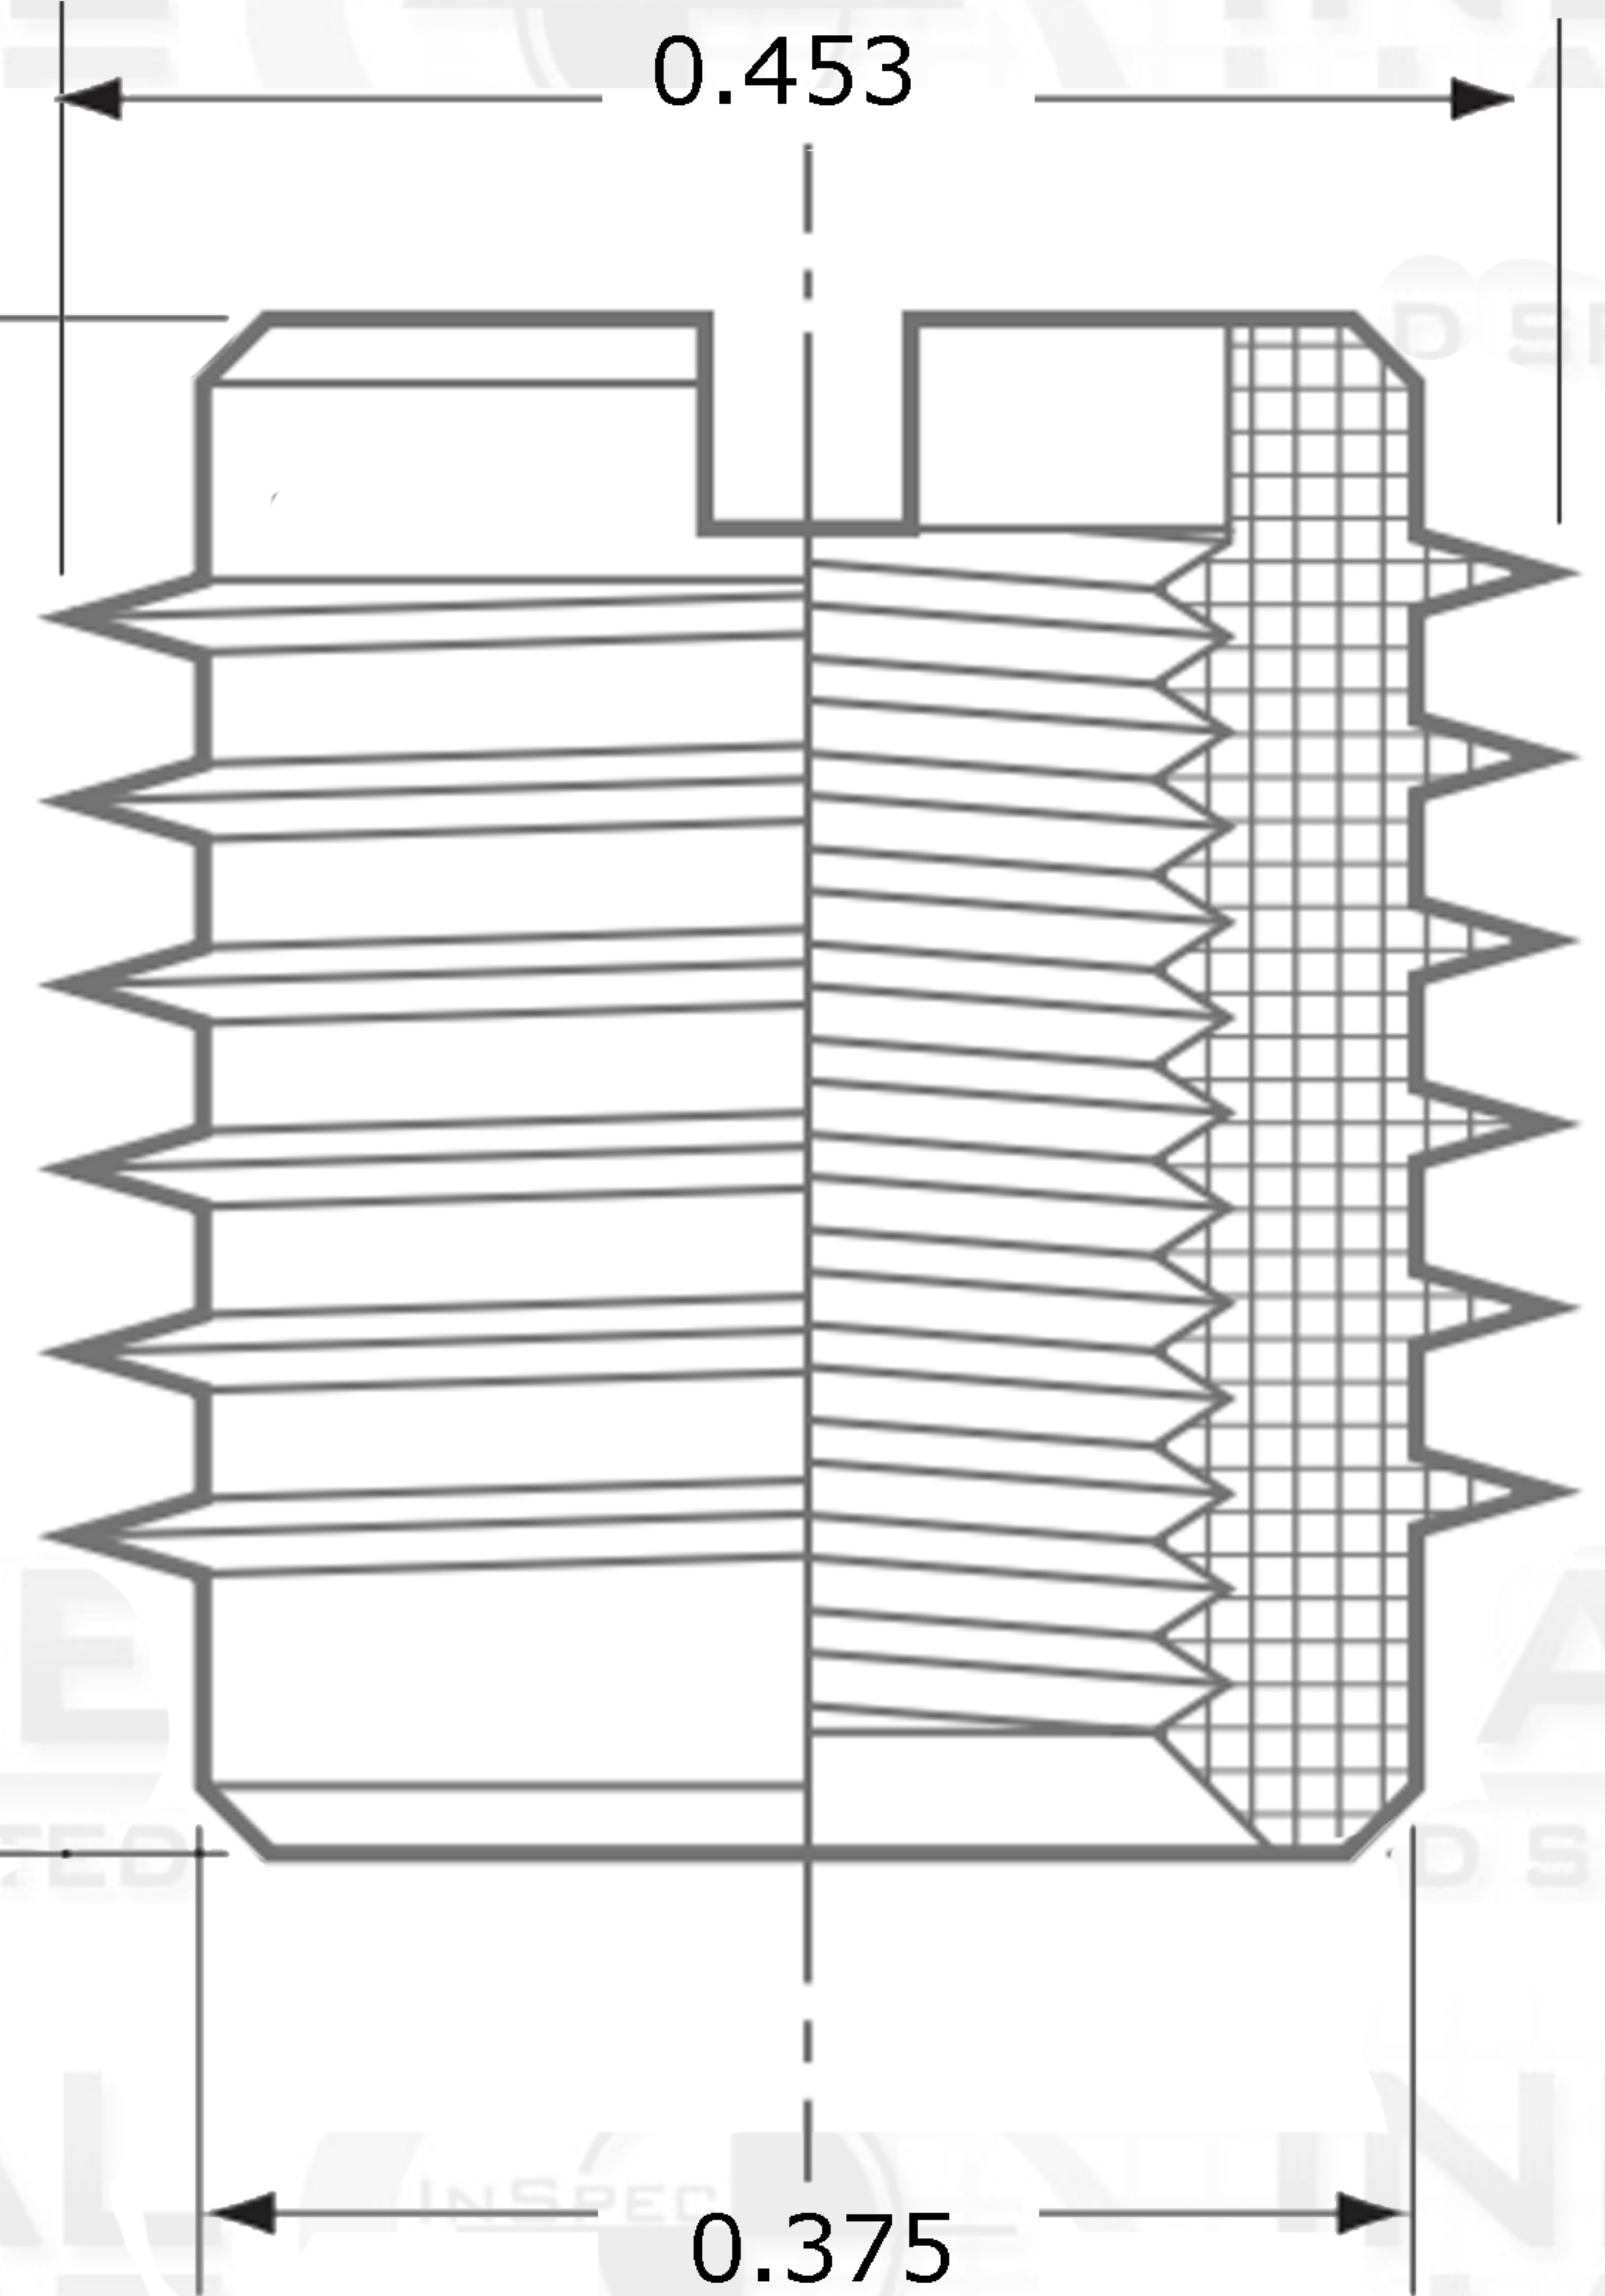

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
			DRAWN		
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
			COMMENTS:		
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: UNC ROTATION: Right-Hand MATERIAL FINISH Stainless Steel Type 303 PART NUMBER 35L6C-PXD8-10-0A			
APPLICATION		DO NOT SCALE DRAWING			

**INDUSTRIAL HARDWARE**  
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1