


# BoardSert Flanged Hex

ZONE		REV.	REVISIONS	DATE	APPROVED
			DESCRIPTION		



Diameter Thread Pitch  
3/8-16

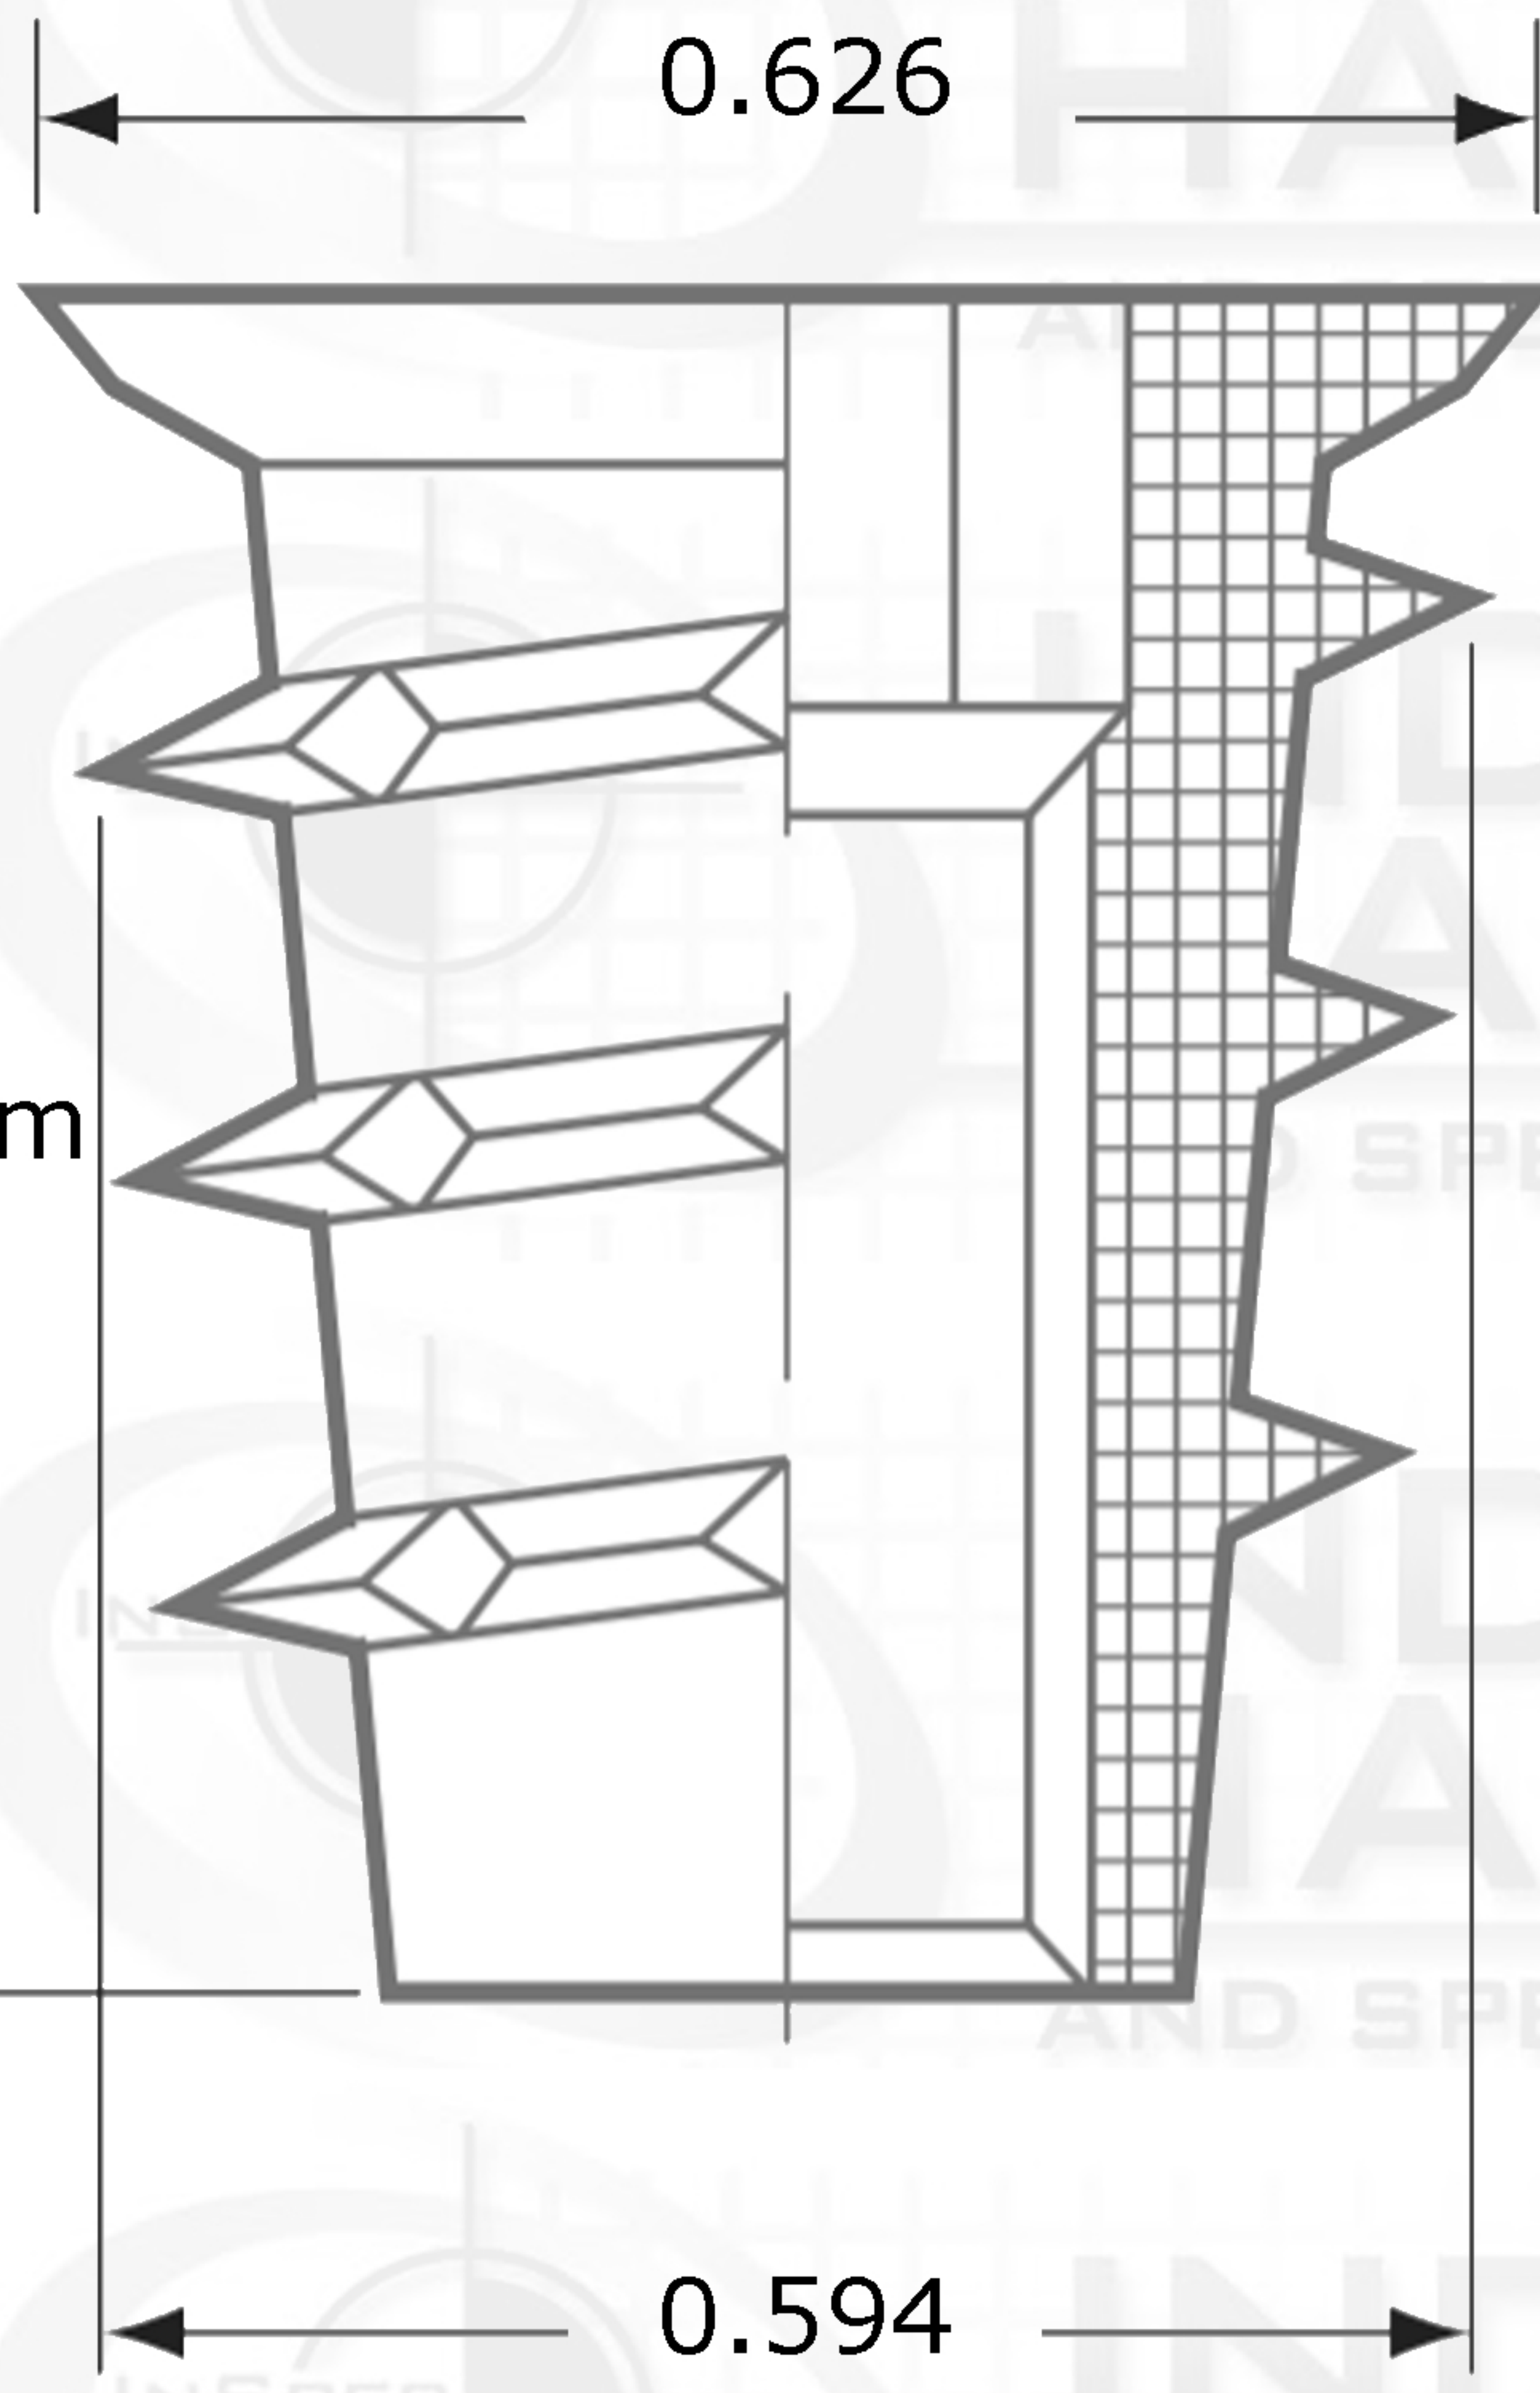

Suggested Drill Bit Size  0.4724 (12mm)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
			DRAWN		
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
			COMMENTS:		
NEXT ASSY	USED ON	35L6C-RE7R-3713-0T			
APPLICATION		DO NOT SCALE DRAWING			

TH. STANDARD: ANSI/ASME  
ACRONYM: UNC  
ROTATION: Right-Hand  
MATERIAL FINISH  
Die-Cast Zinc Alloy  
PART NUMBER  
35L6C-RE7R-3713-0T



**INDUSTRIAL HARDWARE**  
AND SPECIALTIES INCORPORATED  
17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1