

BoardSert Flanged Hex



ZONE		REV.	REVISIONS	DATE	APPROVED
			DESCRIPTION		




Diameter Thread Pitch

3/8-16

Hex Drive

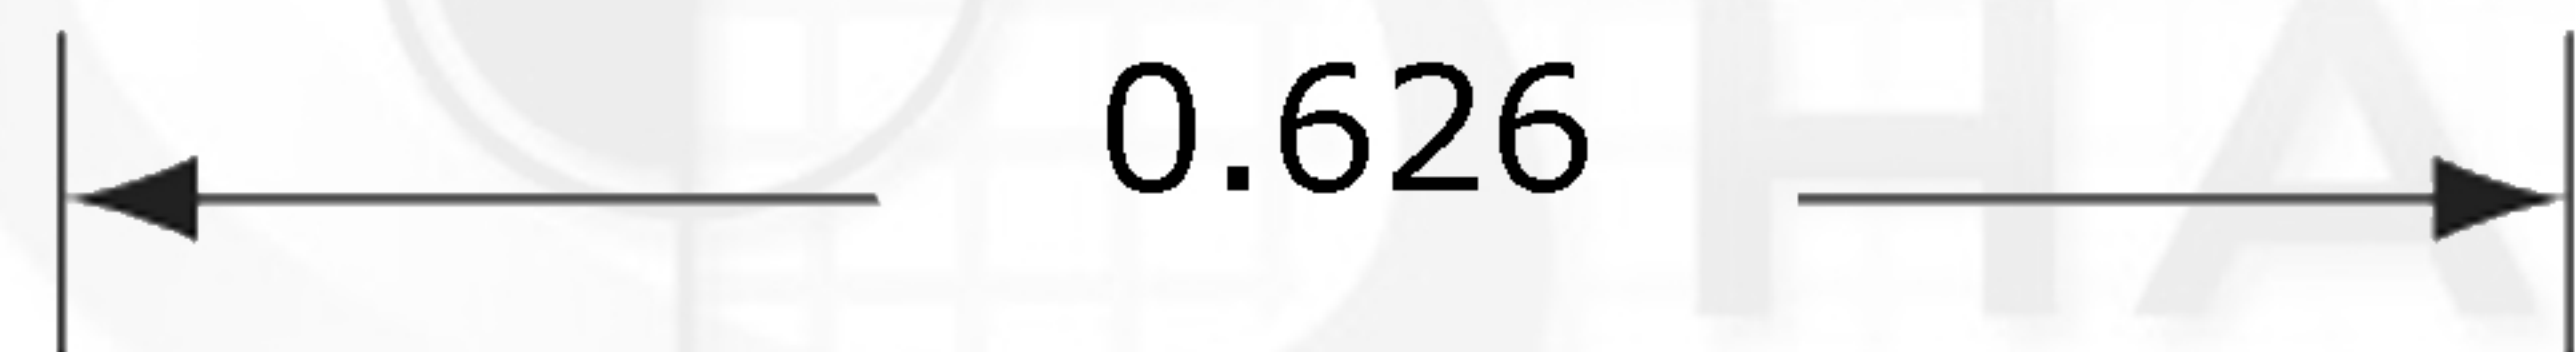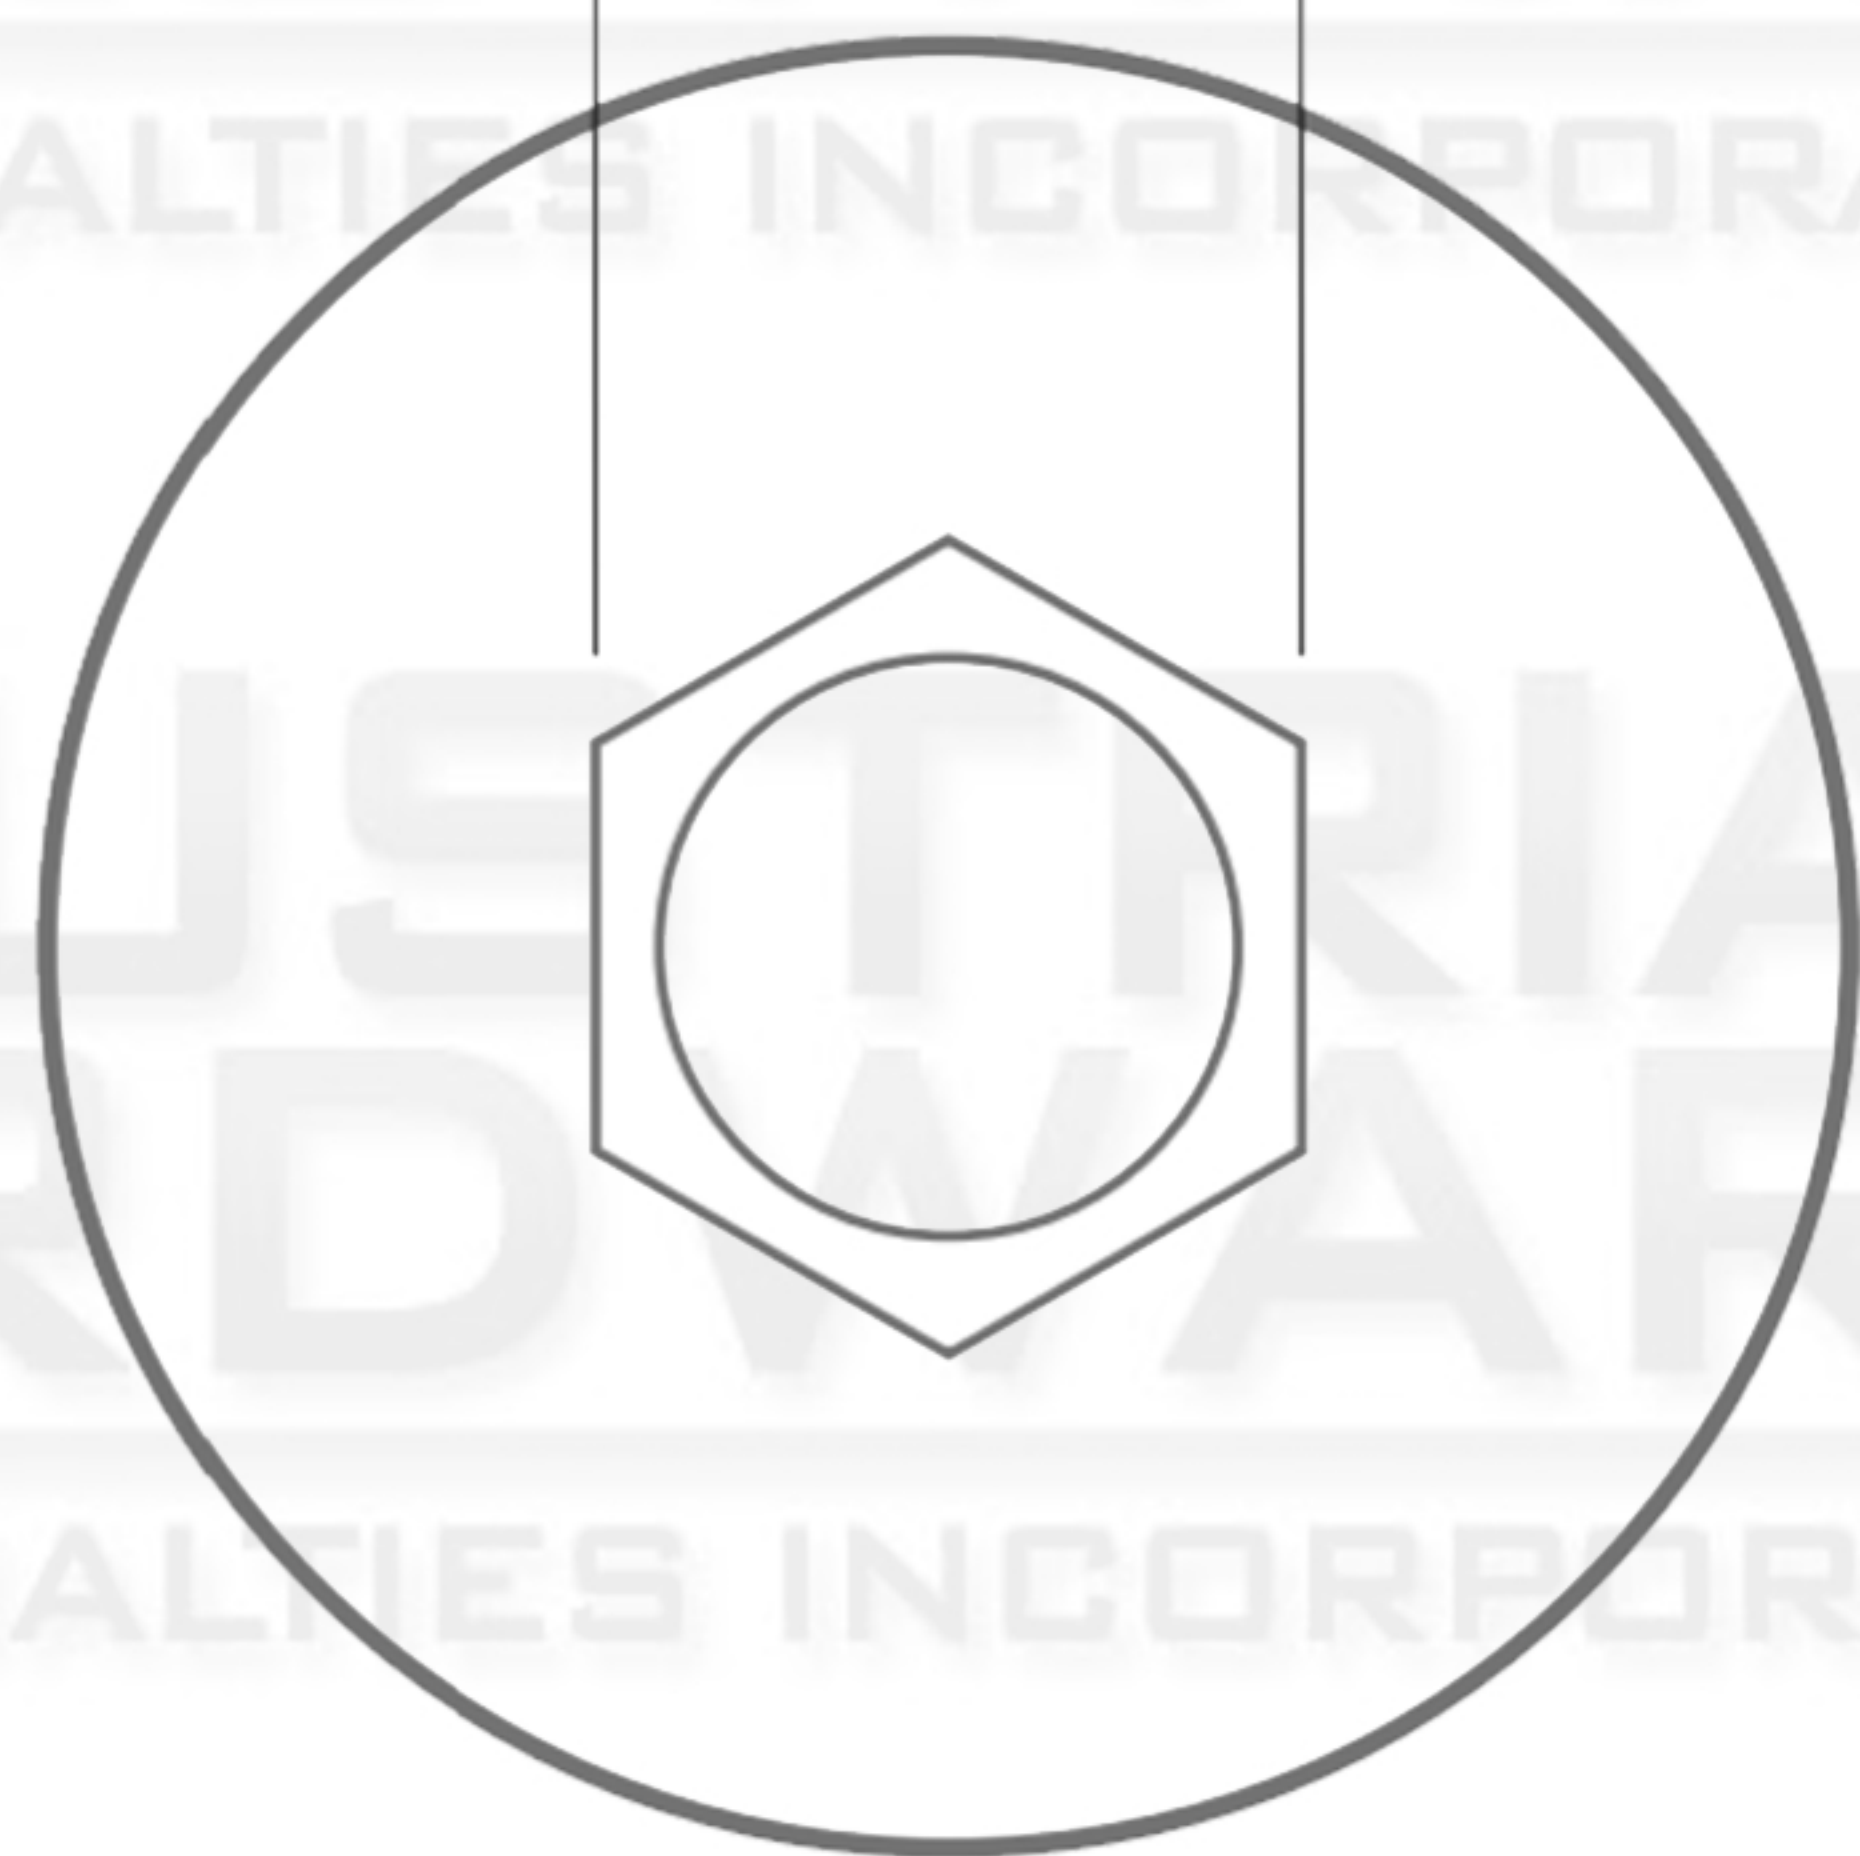

25mm

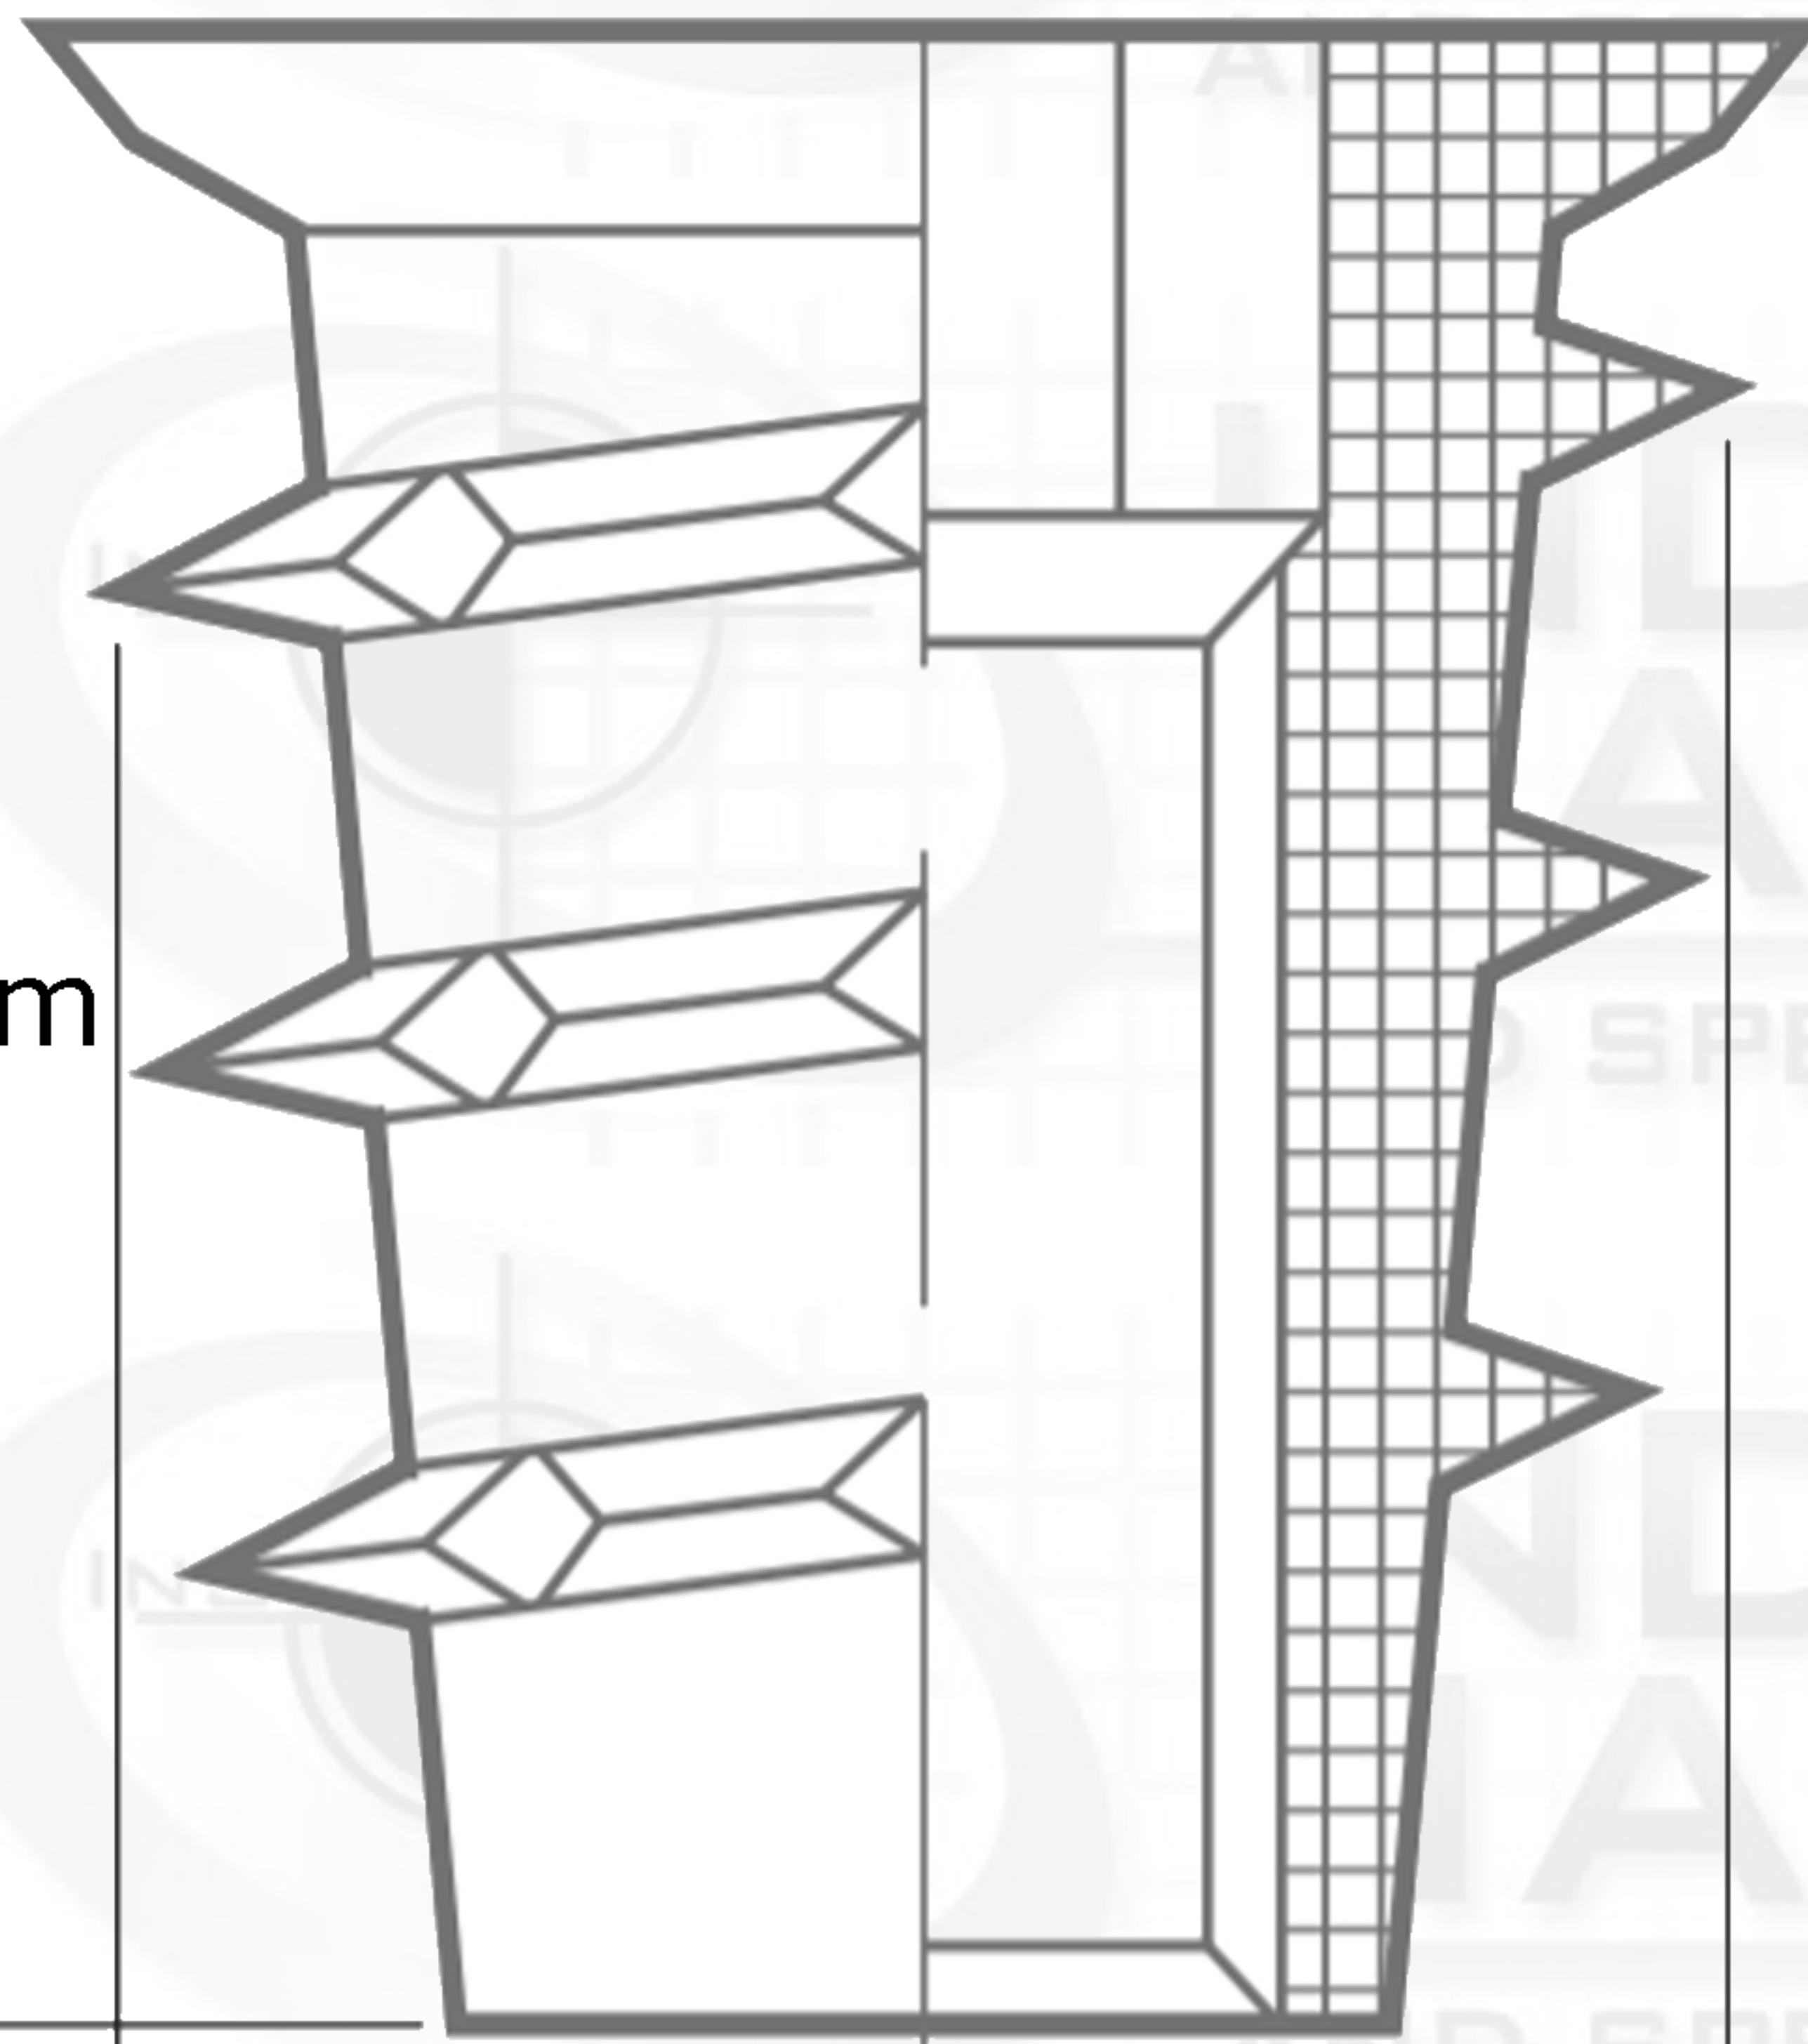

Suggested Drill Bit Size



0.4724 (12mm)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
			DRAWN		
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
			COMMENTS:		
NEXT ASSY	USED ON	35L6C-RE7R-3725-0T			
APPLICATION		DO NOT SCALE DRAWING			

TH. STANDARD: ANSI/ASME
ACRONYM: UNC
ROTATION: Right-Hand
MATERIAL FINISH
Die-Cast Zinc Alloy
PART NUMBER
35L6C-RE7R-3725-0T



INDUSTRIAL HARDWARE
AND SPECIALTIES INCORPORATED
17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1