
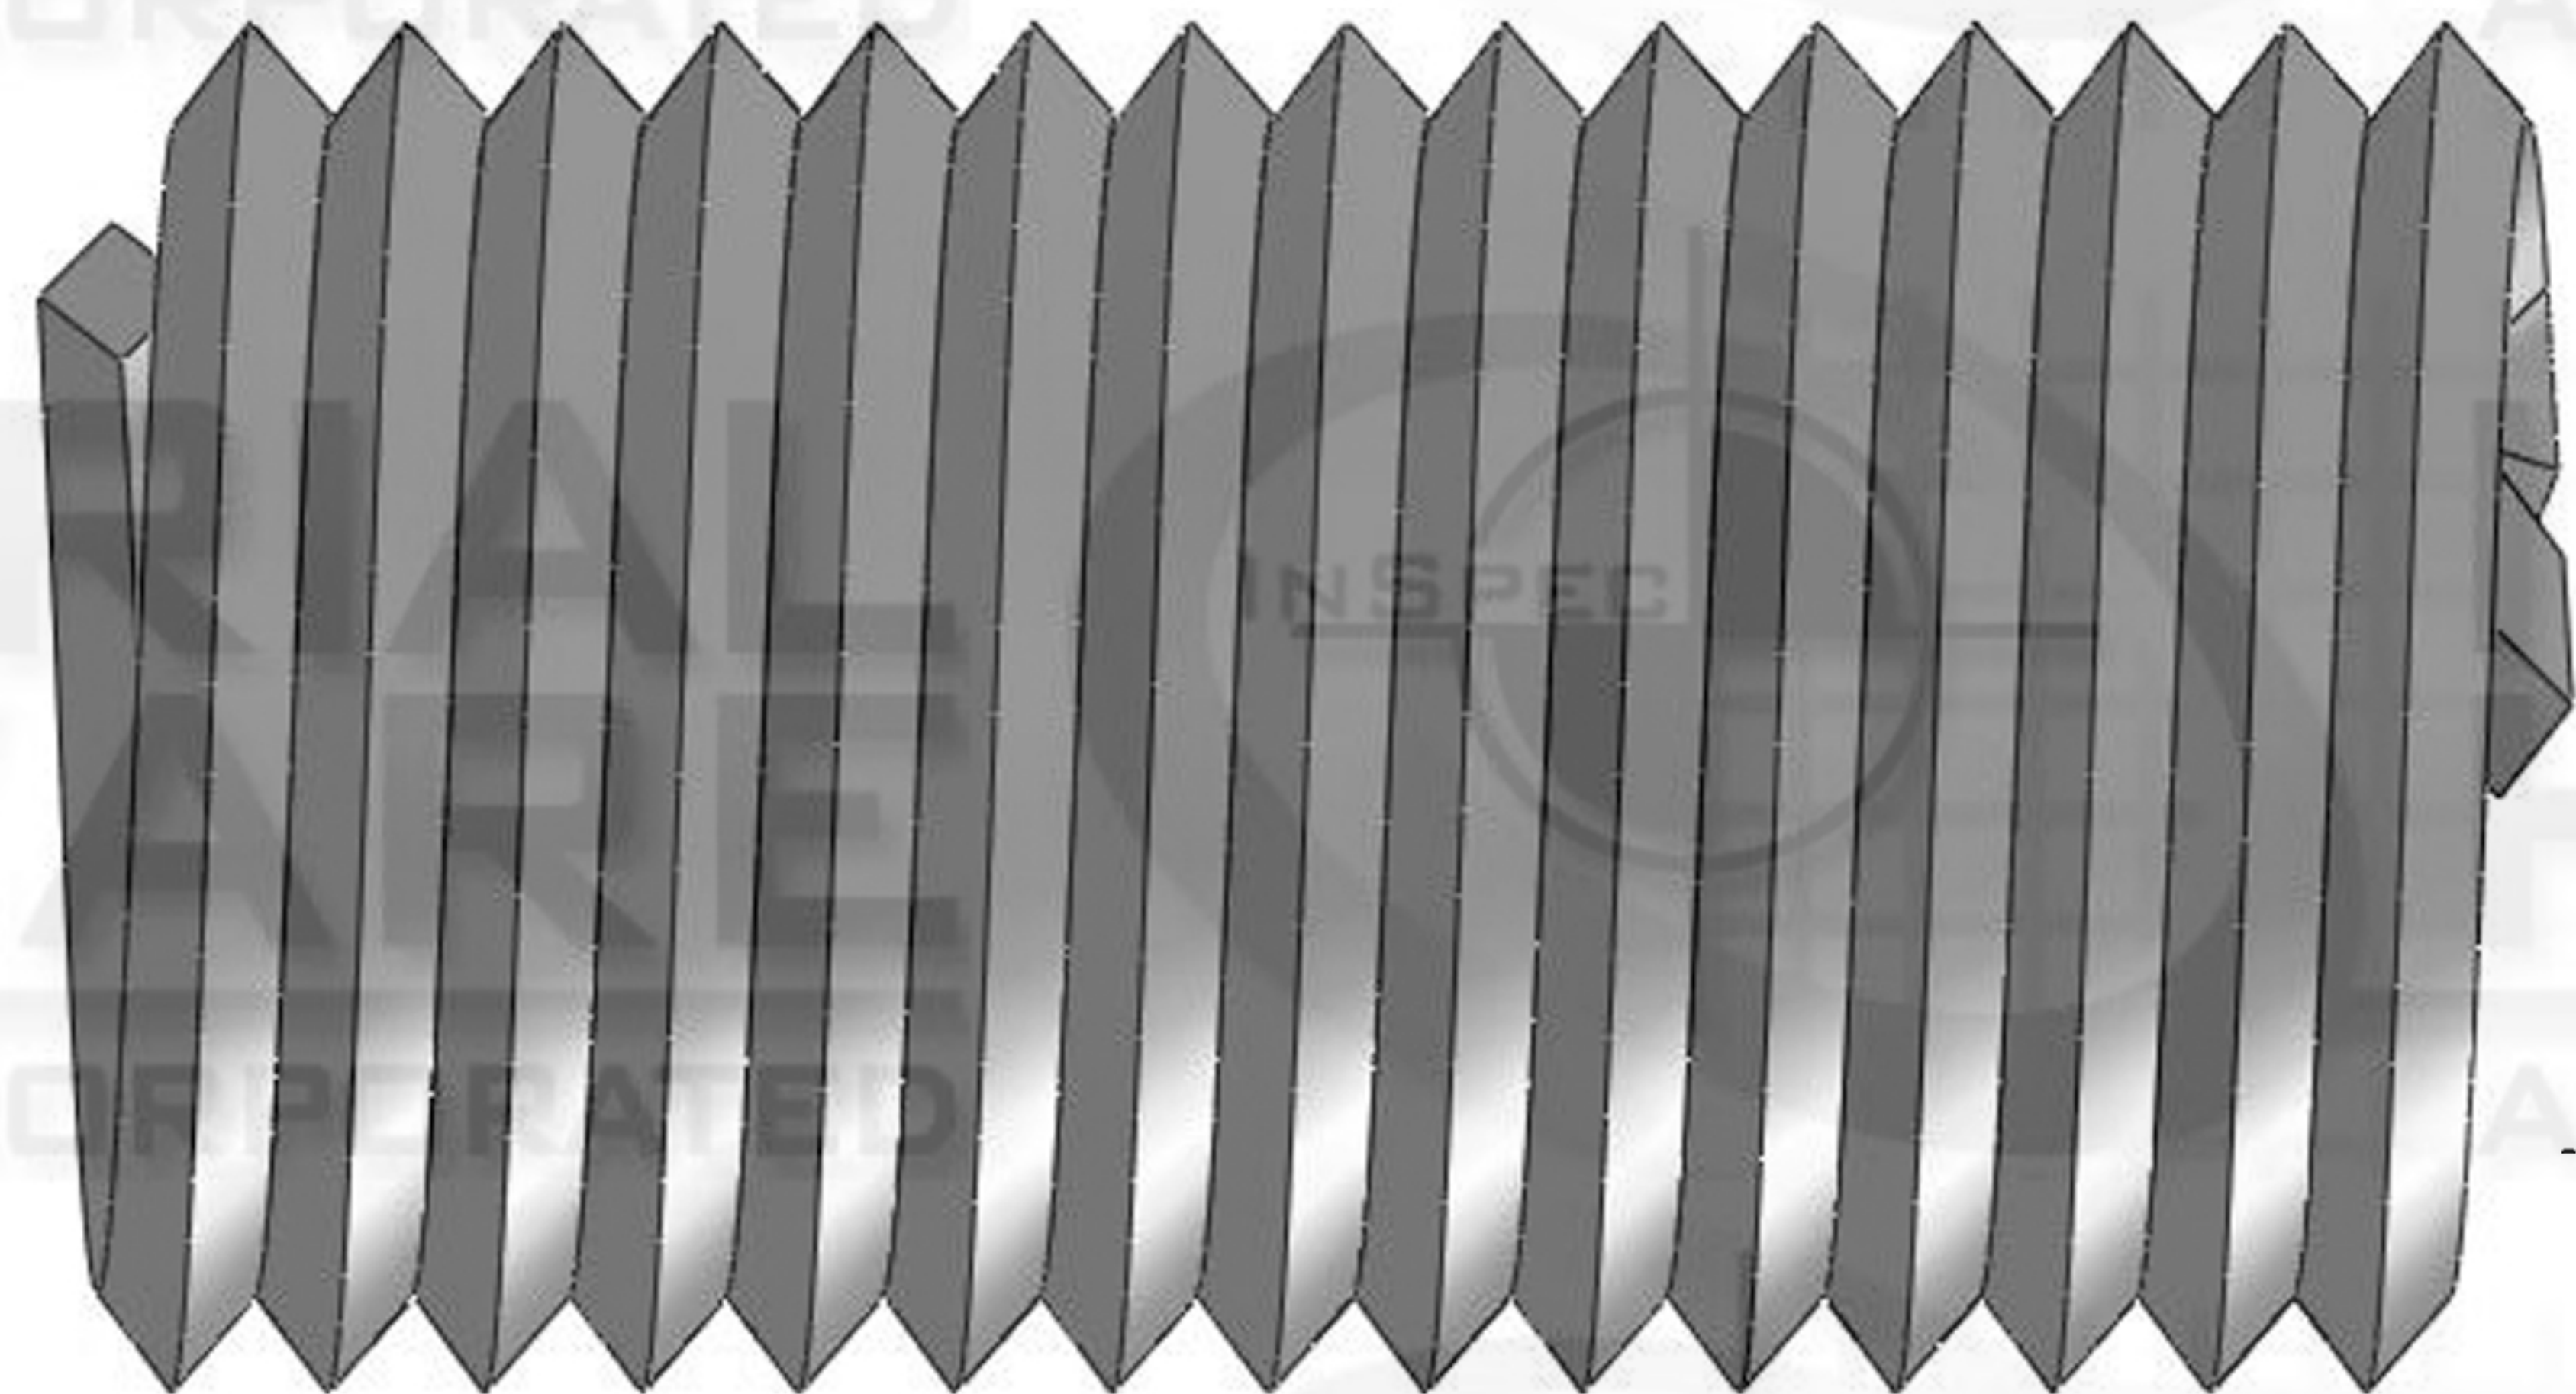


WireSert Free-Running

Diameter Thread Pitch

3/4-16

Tang

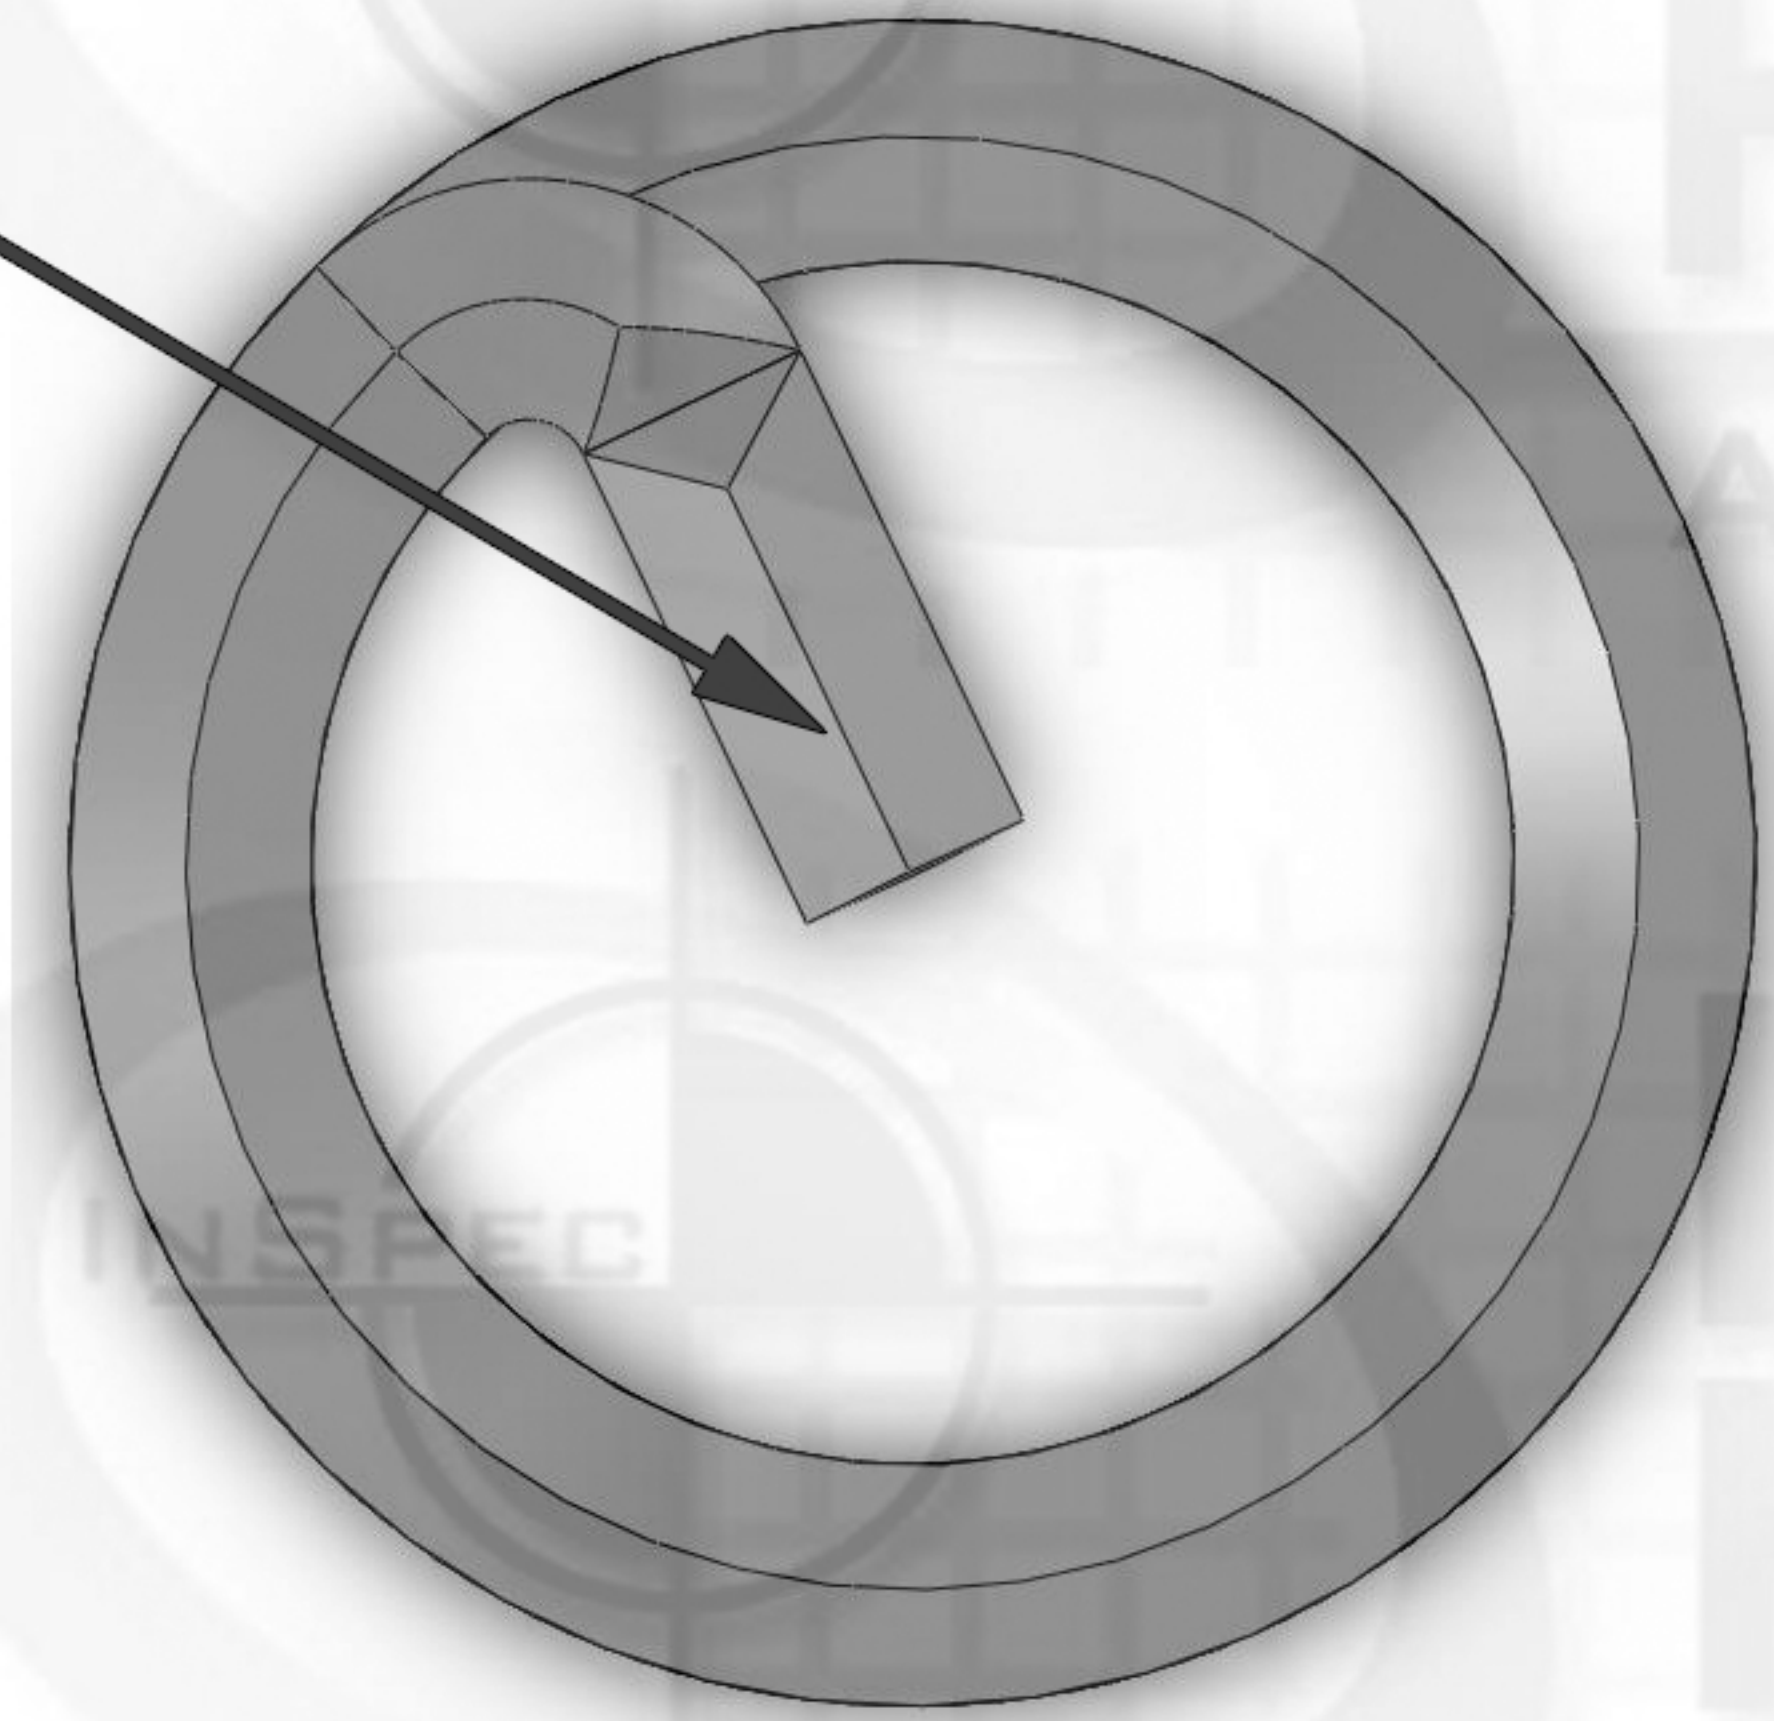

2.25

Suggested Drill Bit Size 0.7656 (49/64)



ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

NATIONAL STOCK NUMBER 5340-00-993-7210	NAME	DATE
MILITARY STANDARD MS124823	DRAWN	
	CHECKED	
	ENG APPR.	
TH. STANDARD: ANSI/ASME ACRONYM: UNF ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	MFG APPR.	
	Q.A.	
PART NUMBER 35L7C-C83G-07530-0F	COMMENTS:	
NEXT ASSY	USED ON	
APPLICATION	DO NOT SCALE DRAWING	



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE A	DWG. NO.	REV.
SCALE:1:8	WEIGHT: 0.78	SHEET 1 OF 1