


WireSert Locking

Diameter Thread Pitch

1/2-20

Tang

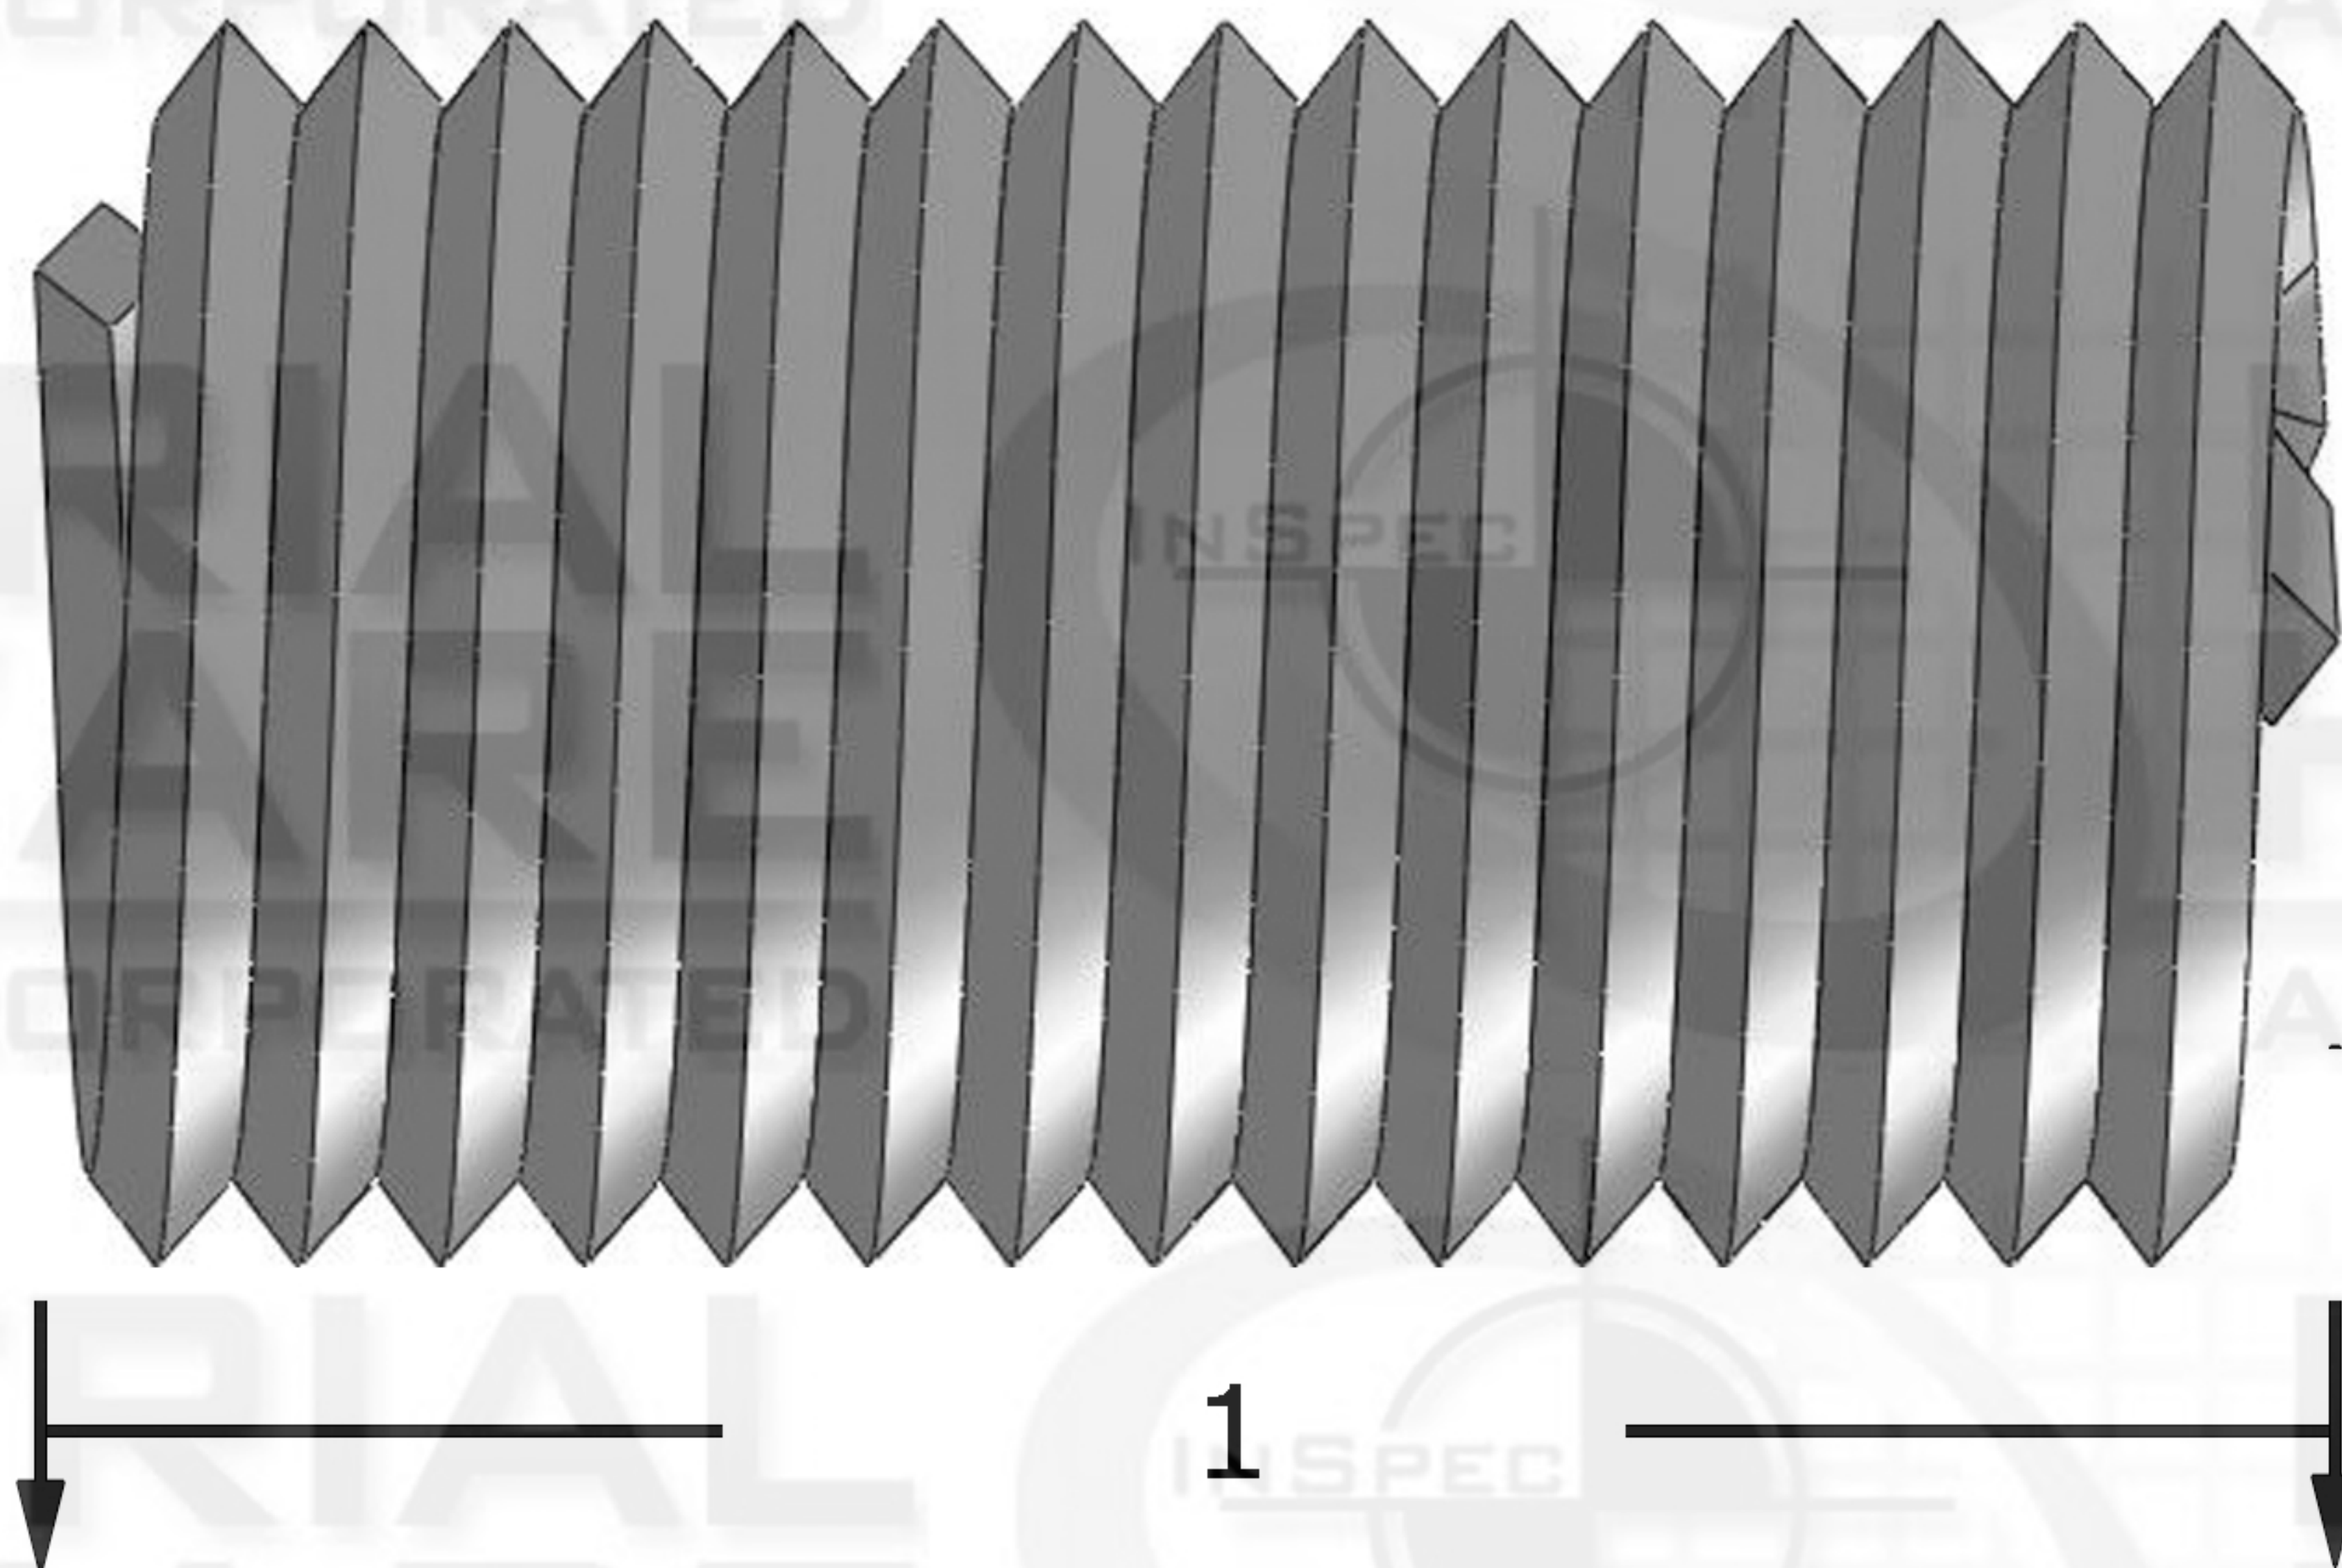

Suggested Drill Bit Size  0.5156 (33/64)

1

ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

NATIONAL STOCK NUMBER	5340-00-721-7915	DRAWN	NAME	DATE
MILITARY STANDARD	MS21209-F8-20	CHECKED		
TH. STANDARD: ANSI/ASME		ENG APPR.		
ACRONYM: UNF		MFG APPR.		
ROTATION: Right-Hand		Q.A.		
MATERIAL FINISH	Stainless Steel 18-8	COMMENTS:		
PART NUMBER	35L7C-C8K4-05020-1J			
NEXT ASSY	USED ON			
APPLICATION	DO NOT SCALE DRAWING			



17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.61	SHEET 1 OF 1