




# WireSert Locking

ZONE		REV.	REVISIONS DESCRIPTION	DATE	APPROVED

Diameter Thread Pitch

1-1/2-12

Tang

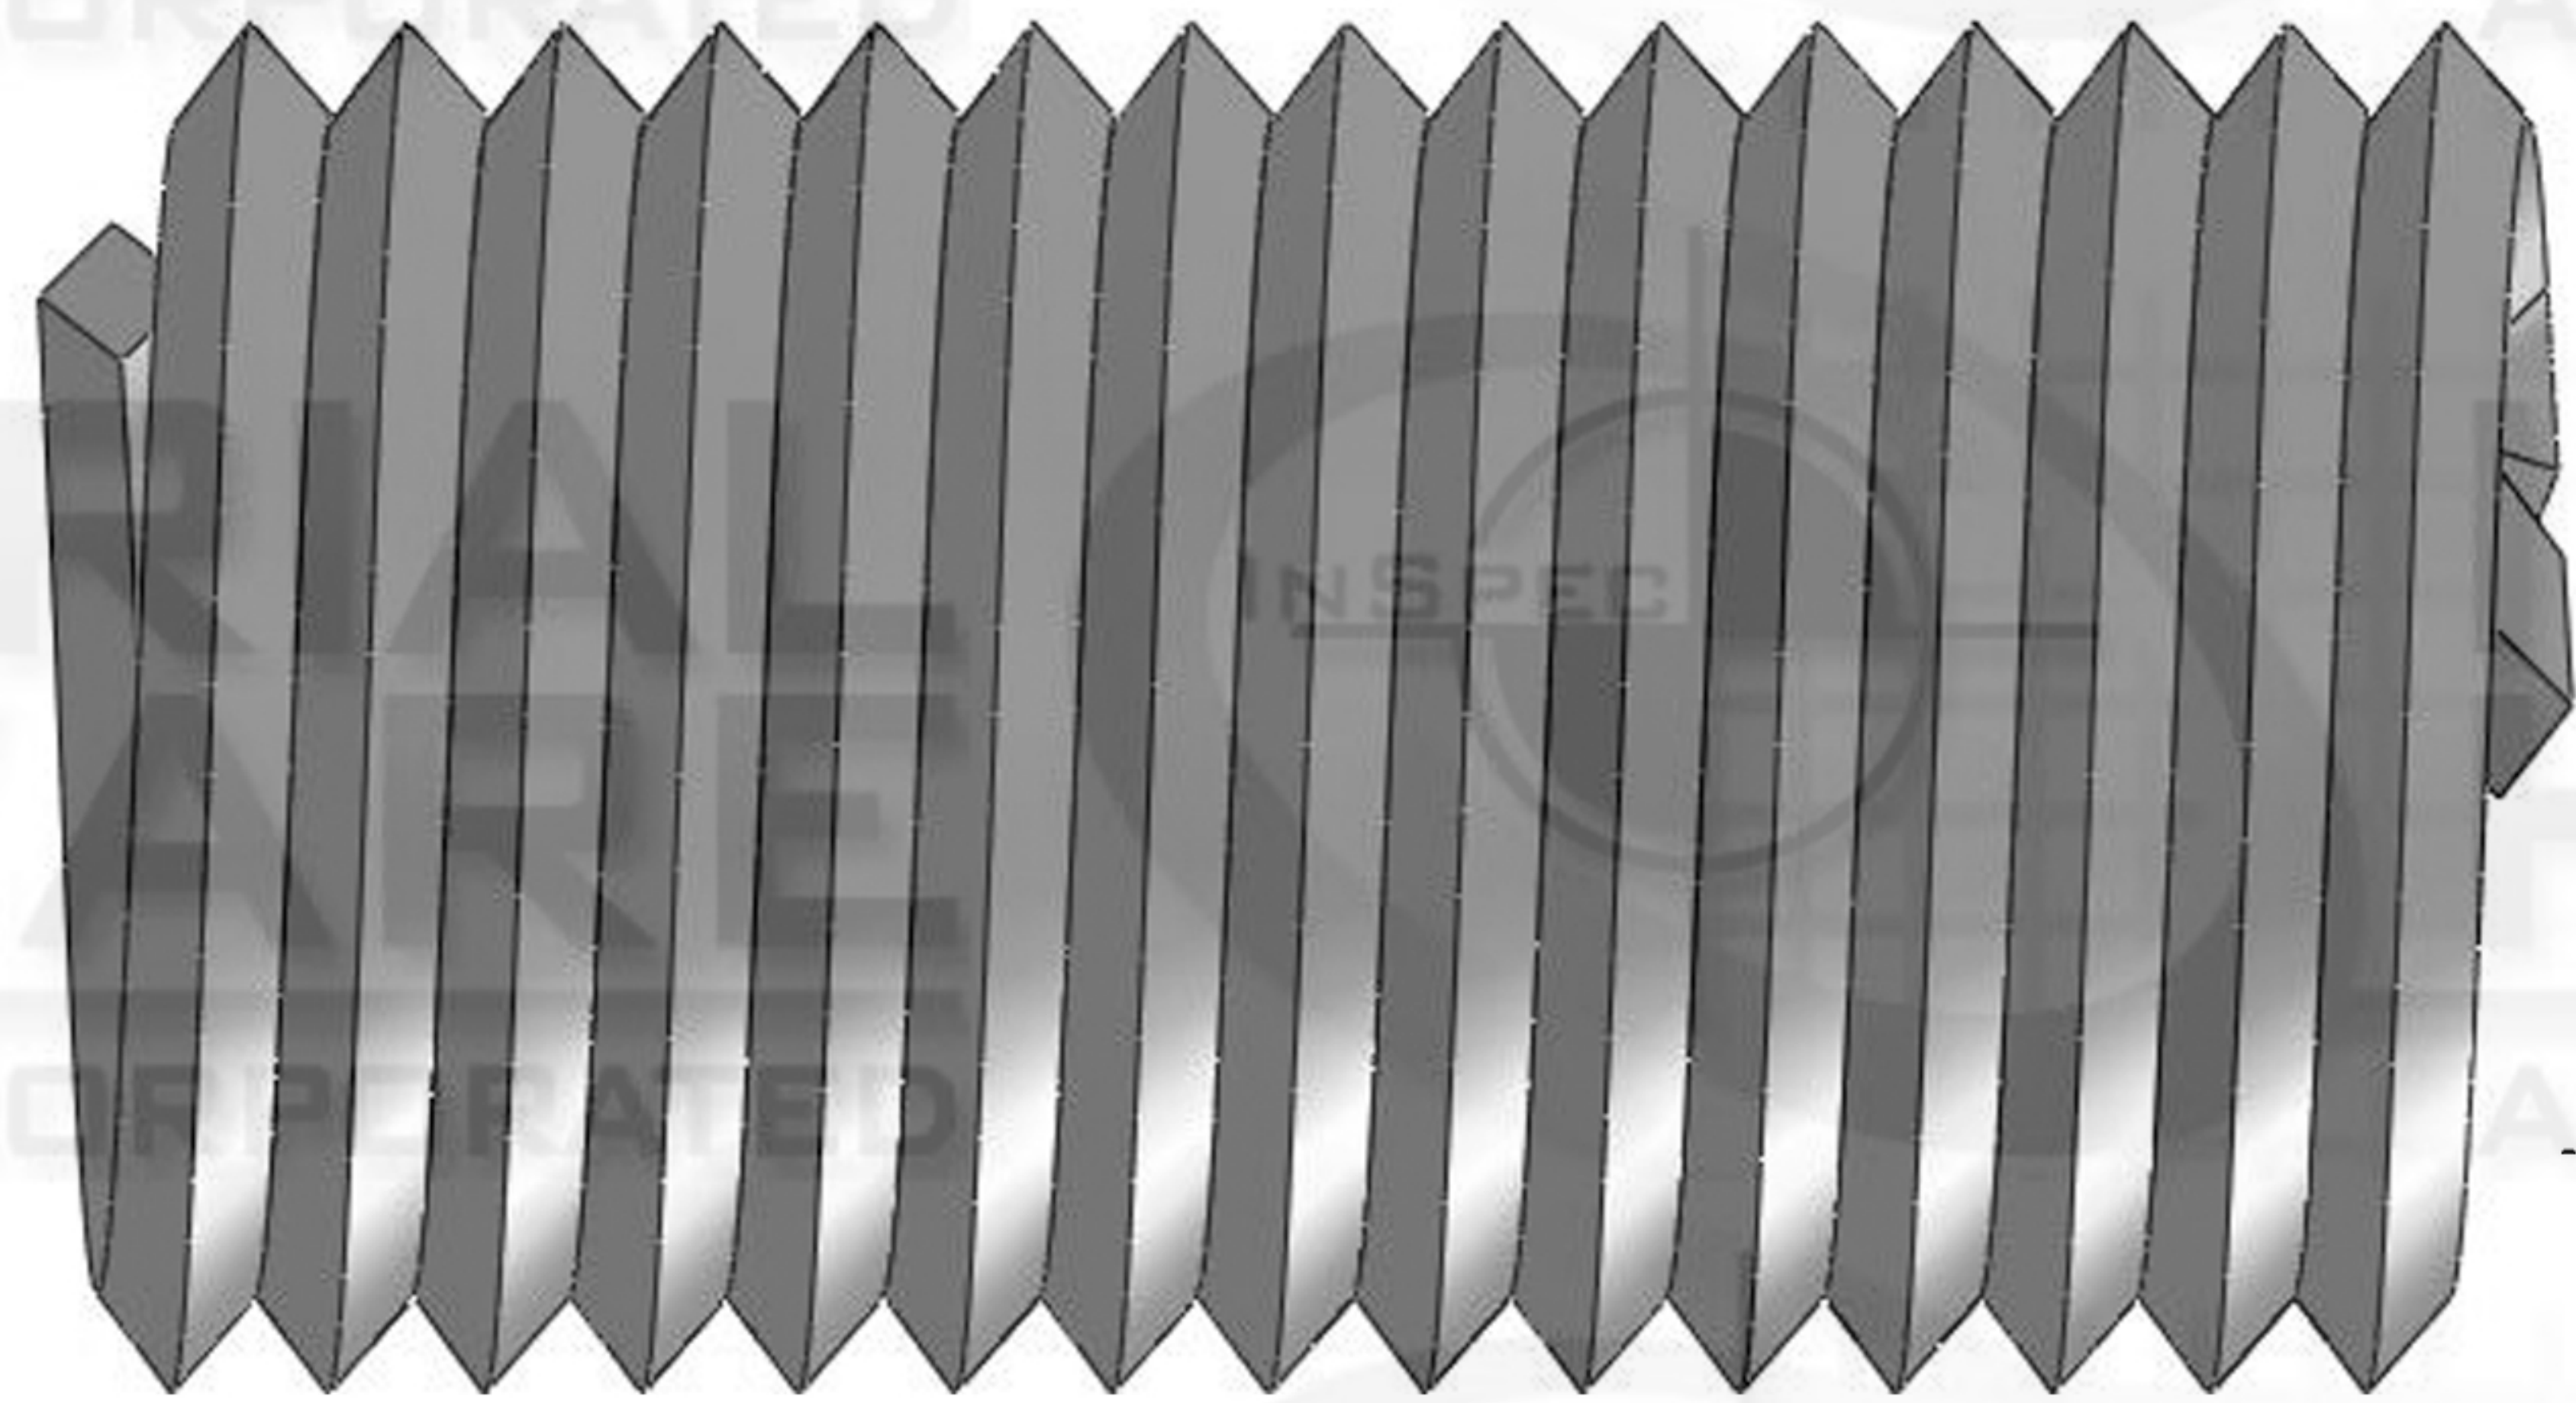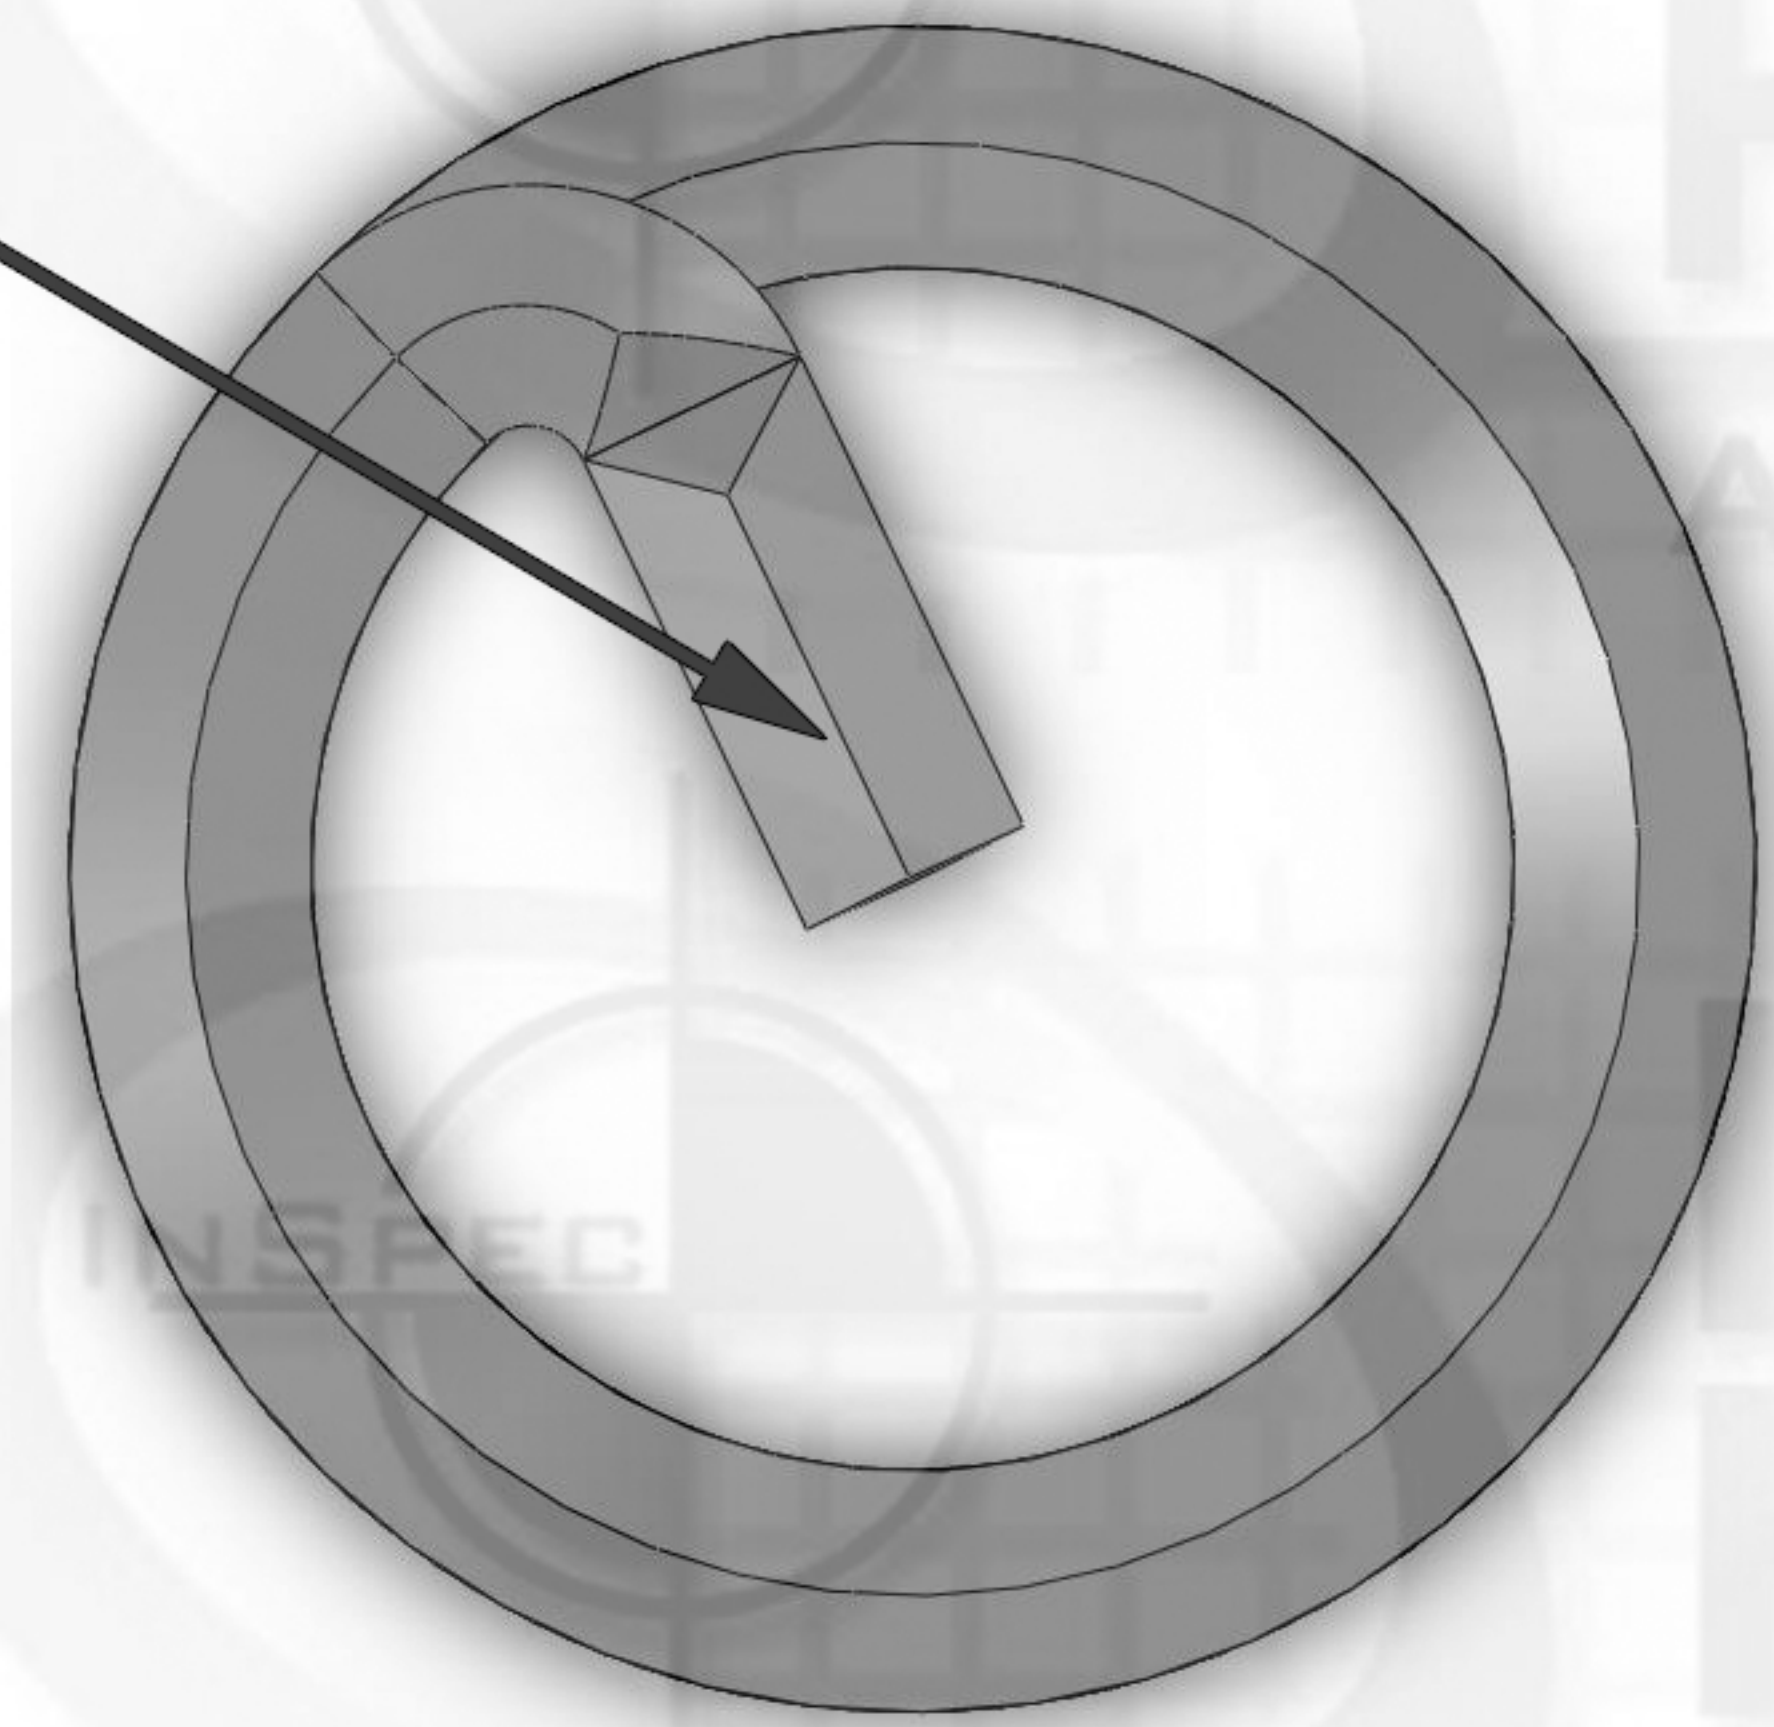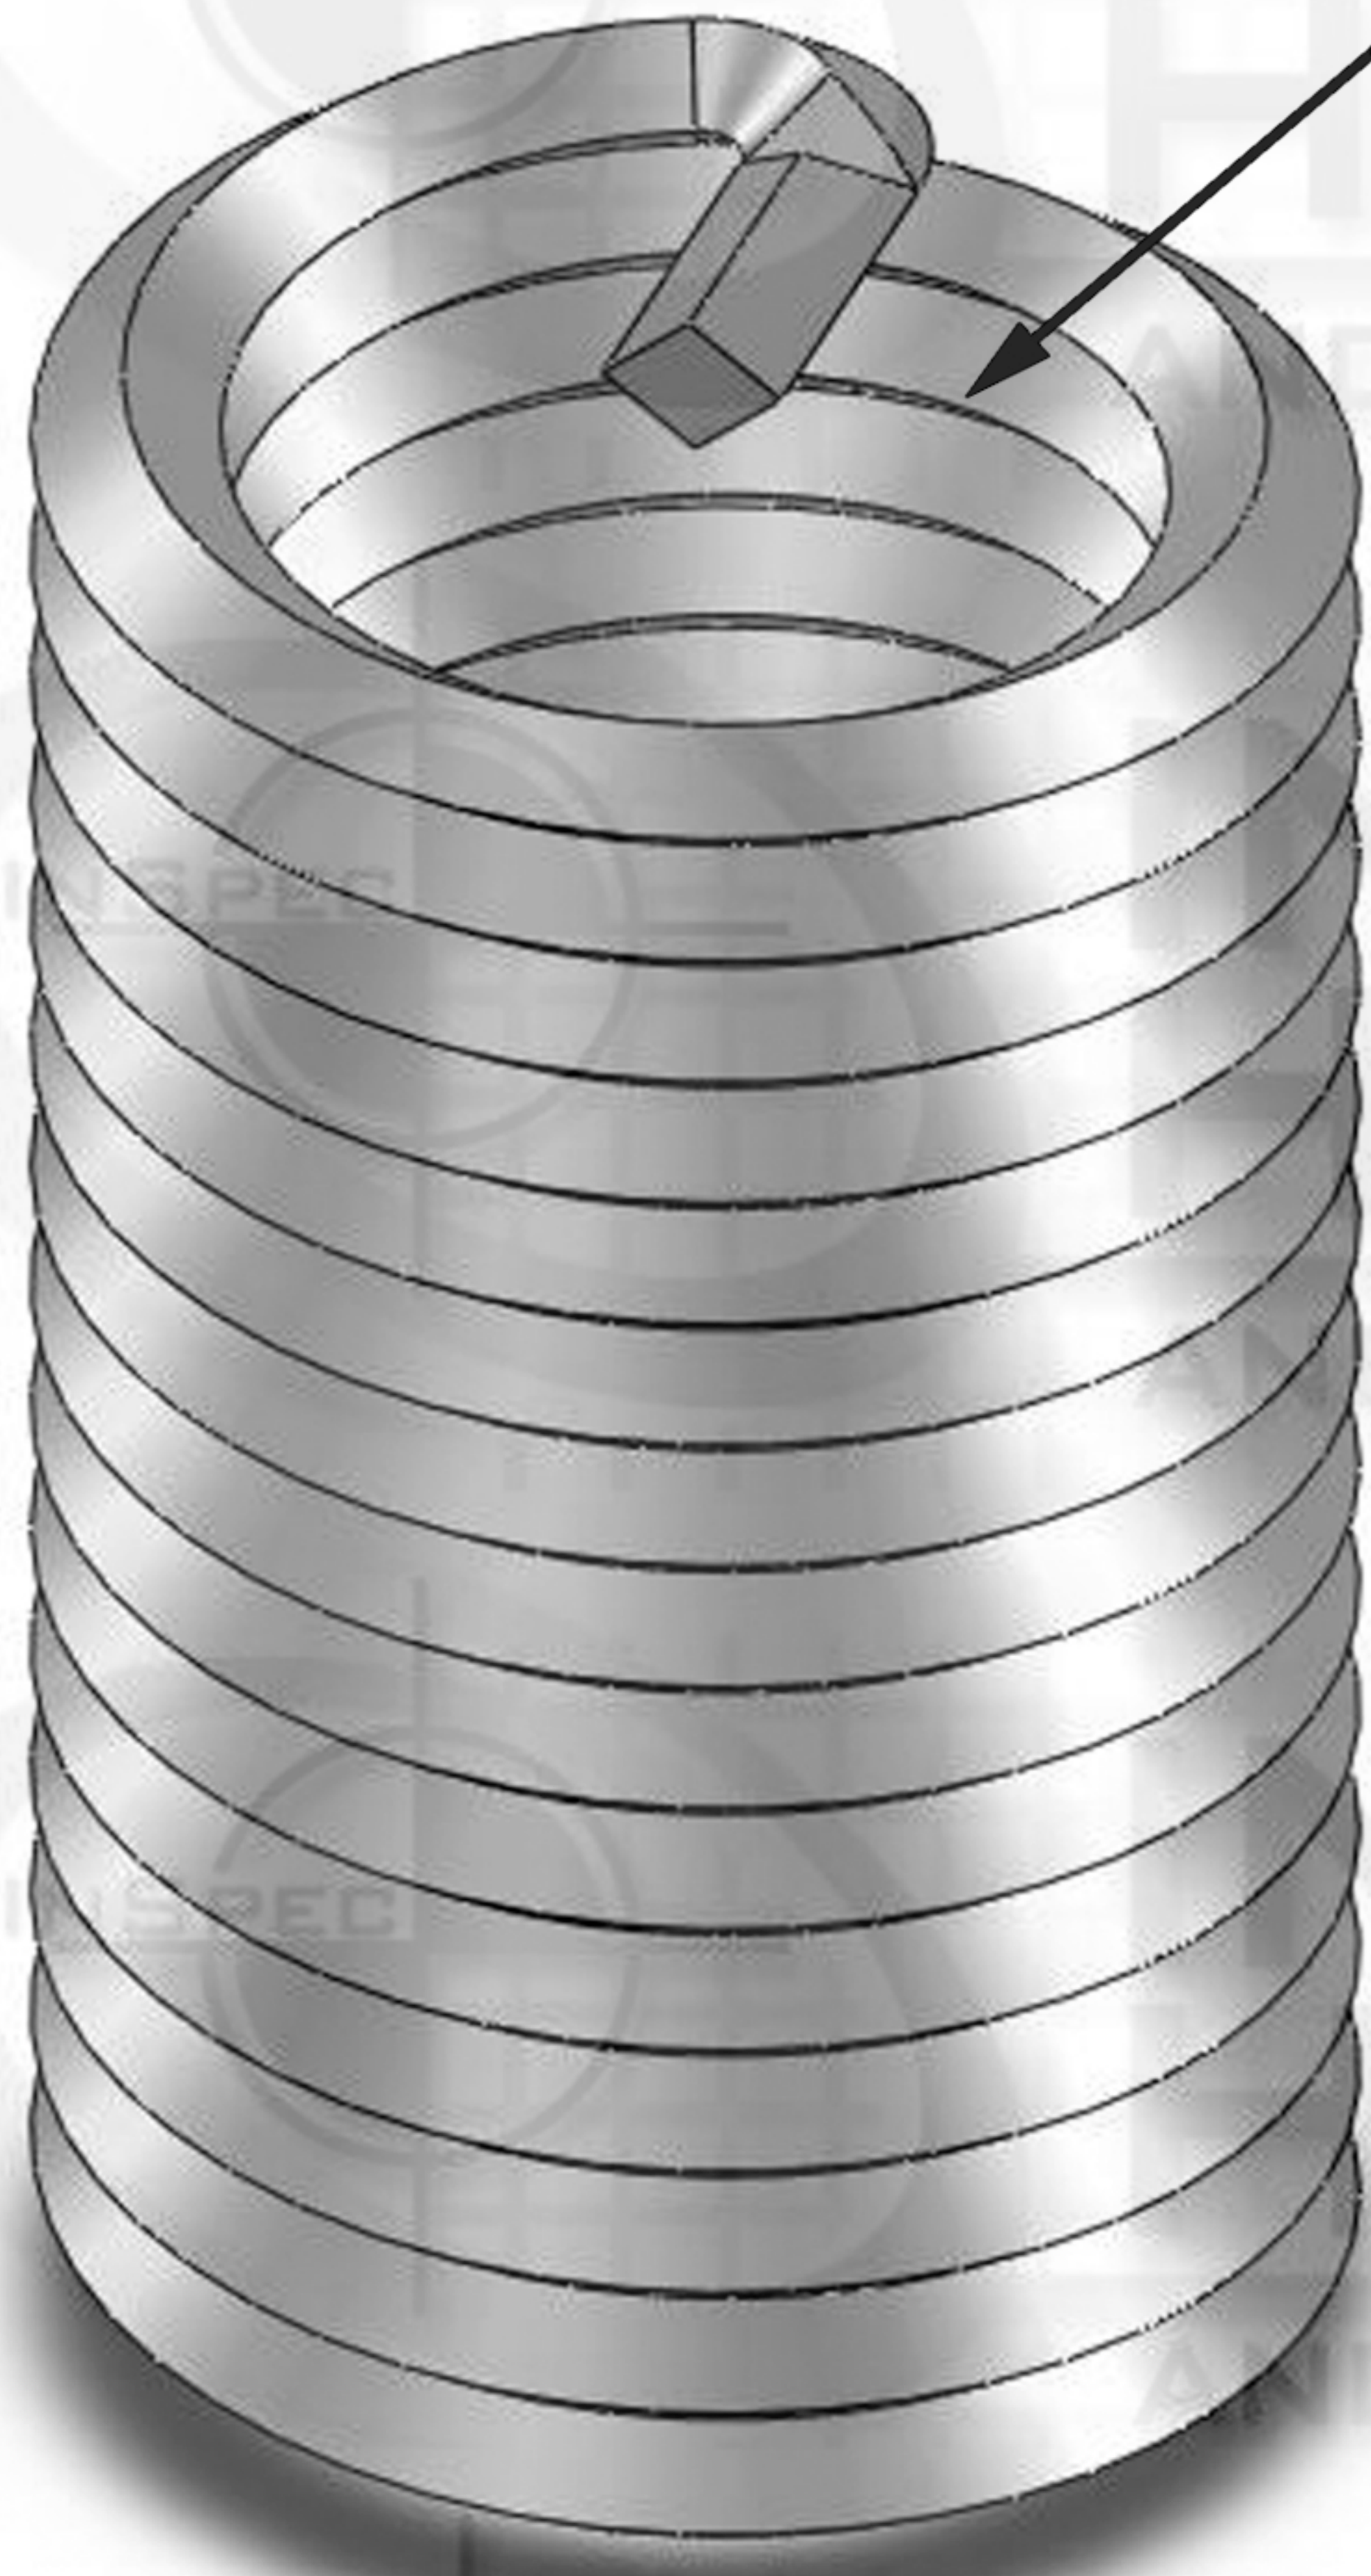

3.75

Suggested Drill Bit Size 1.5313 (1-17/32)



## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		MILITARY STANDARD MS21209-F2425	DRAWN	NAME	DATE
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
			COMMENTS:		
NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: UNF ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8			
		PART NUMBER 35L7C-C8K4-15025-05			
APPLICATION		DO NOT SCALE DRAWING			



**17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE: 1:8	WEIGHT: 1.175	SHEET 1 OF 1