
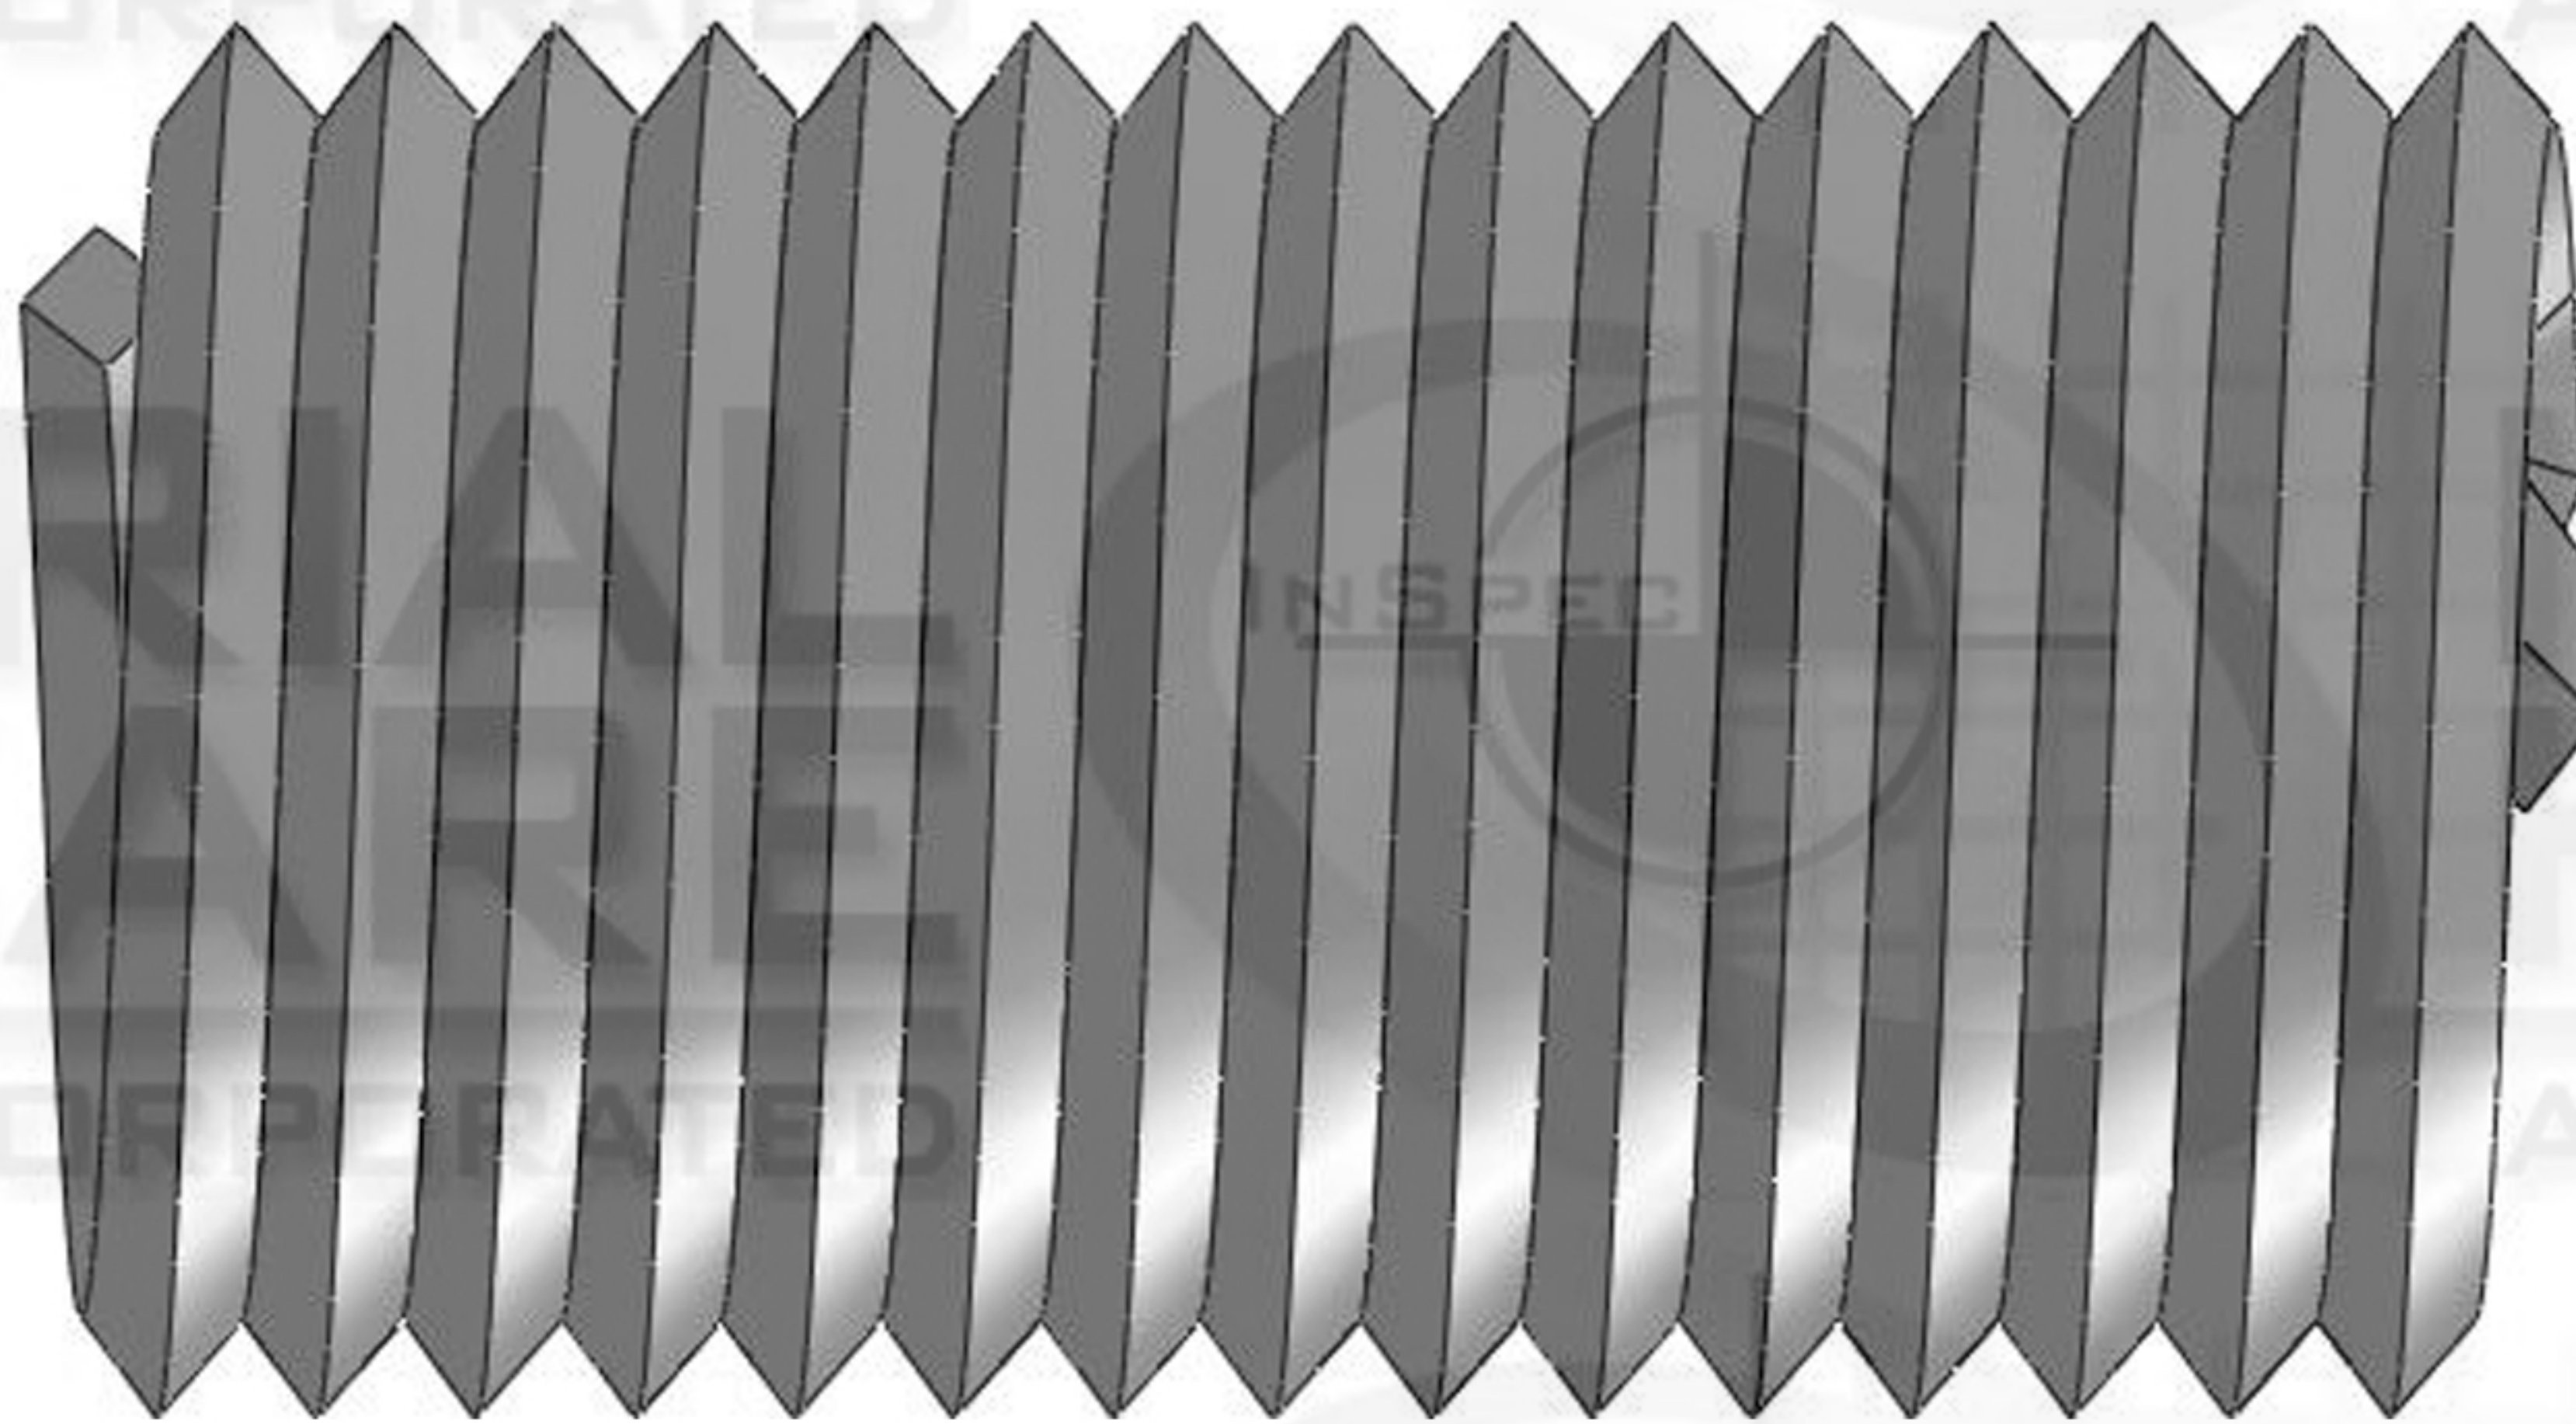
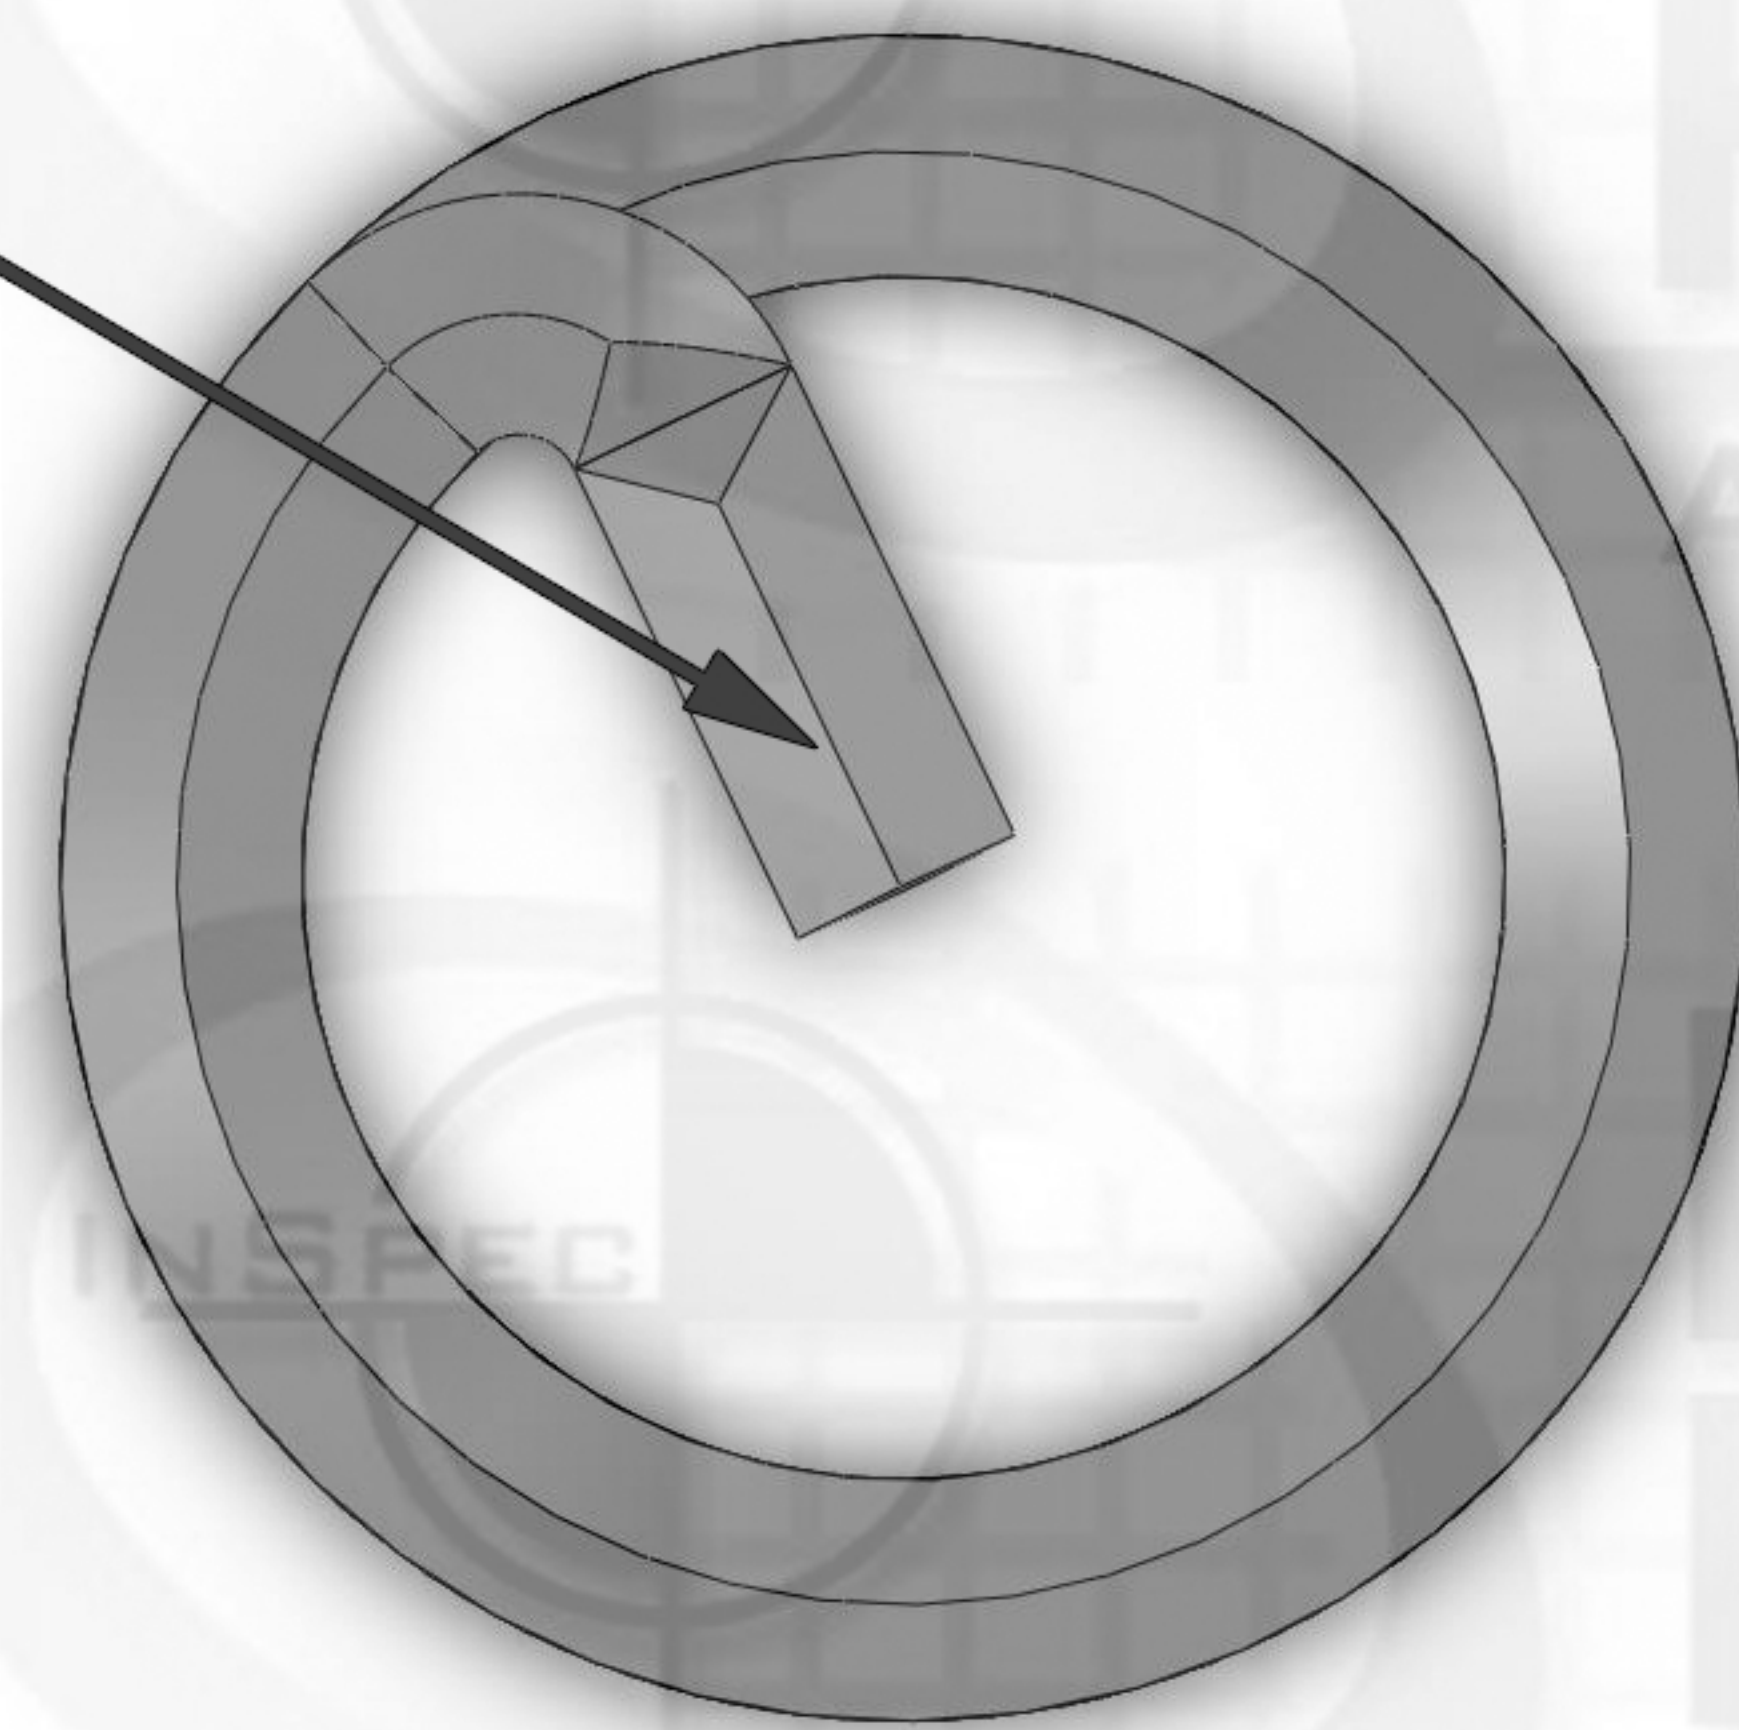


WireSert Locking

Diameter Thread Pitch

2-1/2-8

Tang

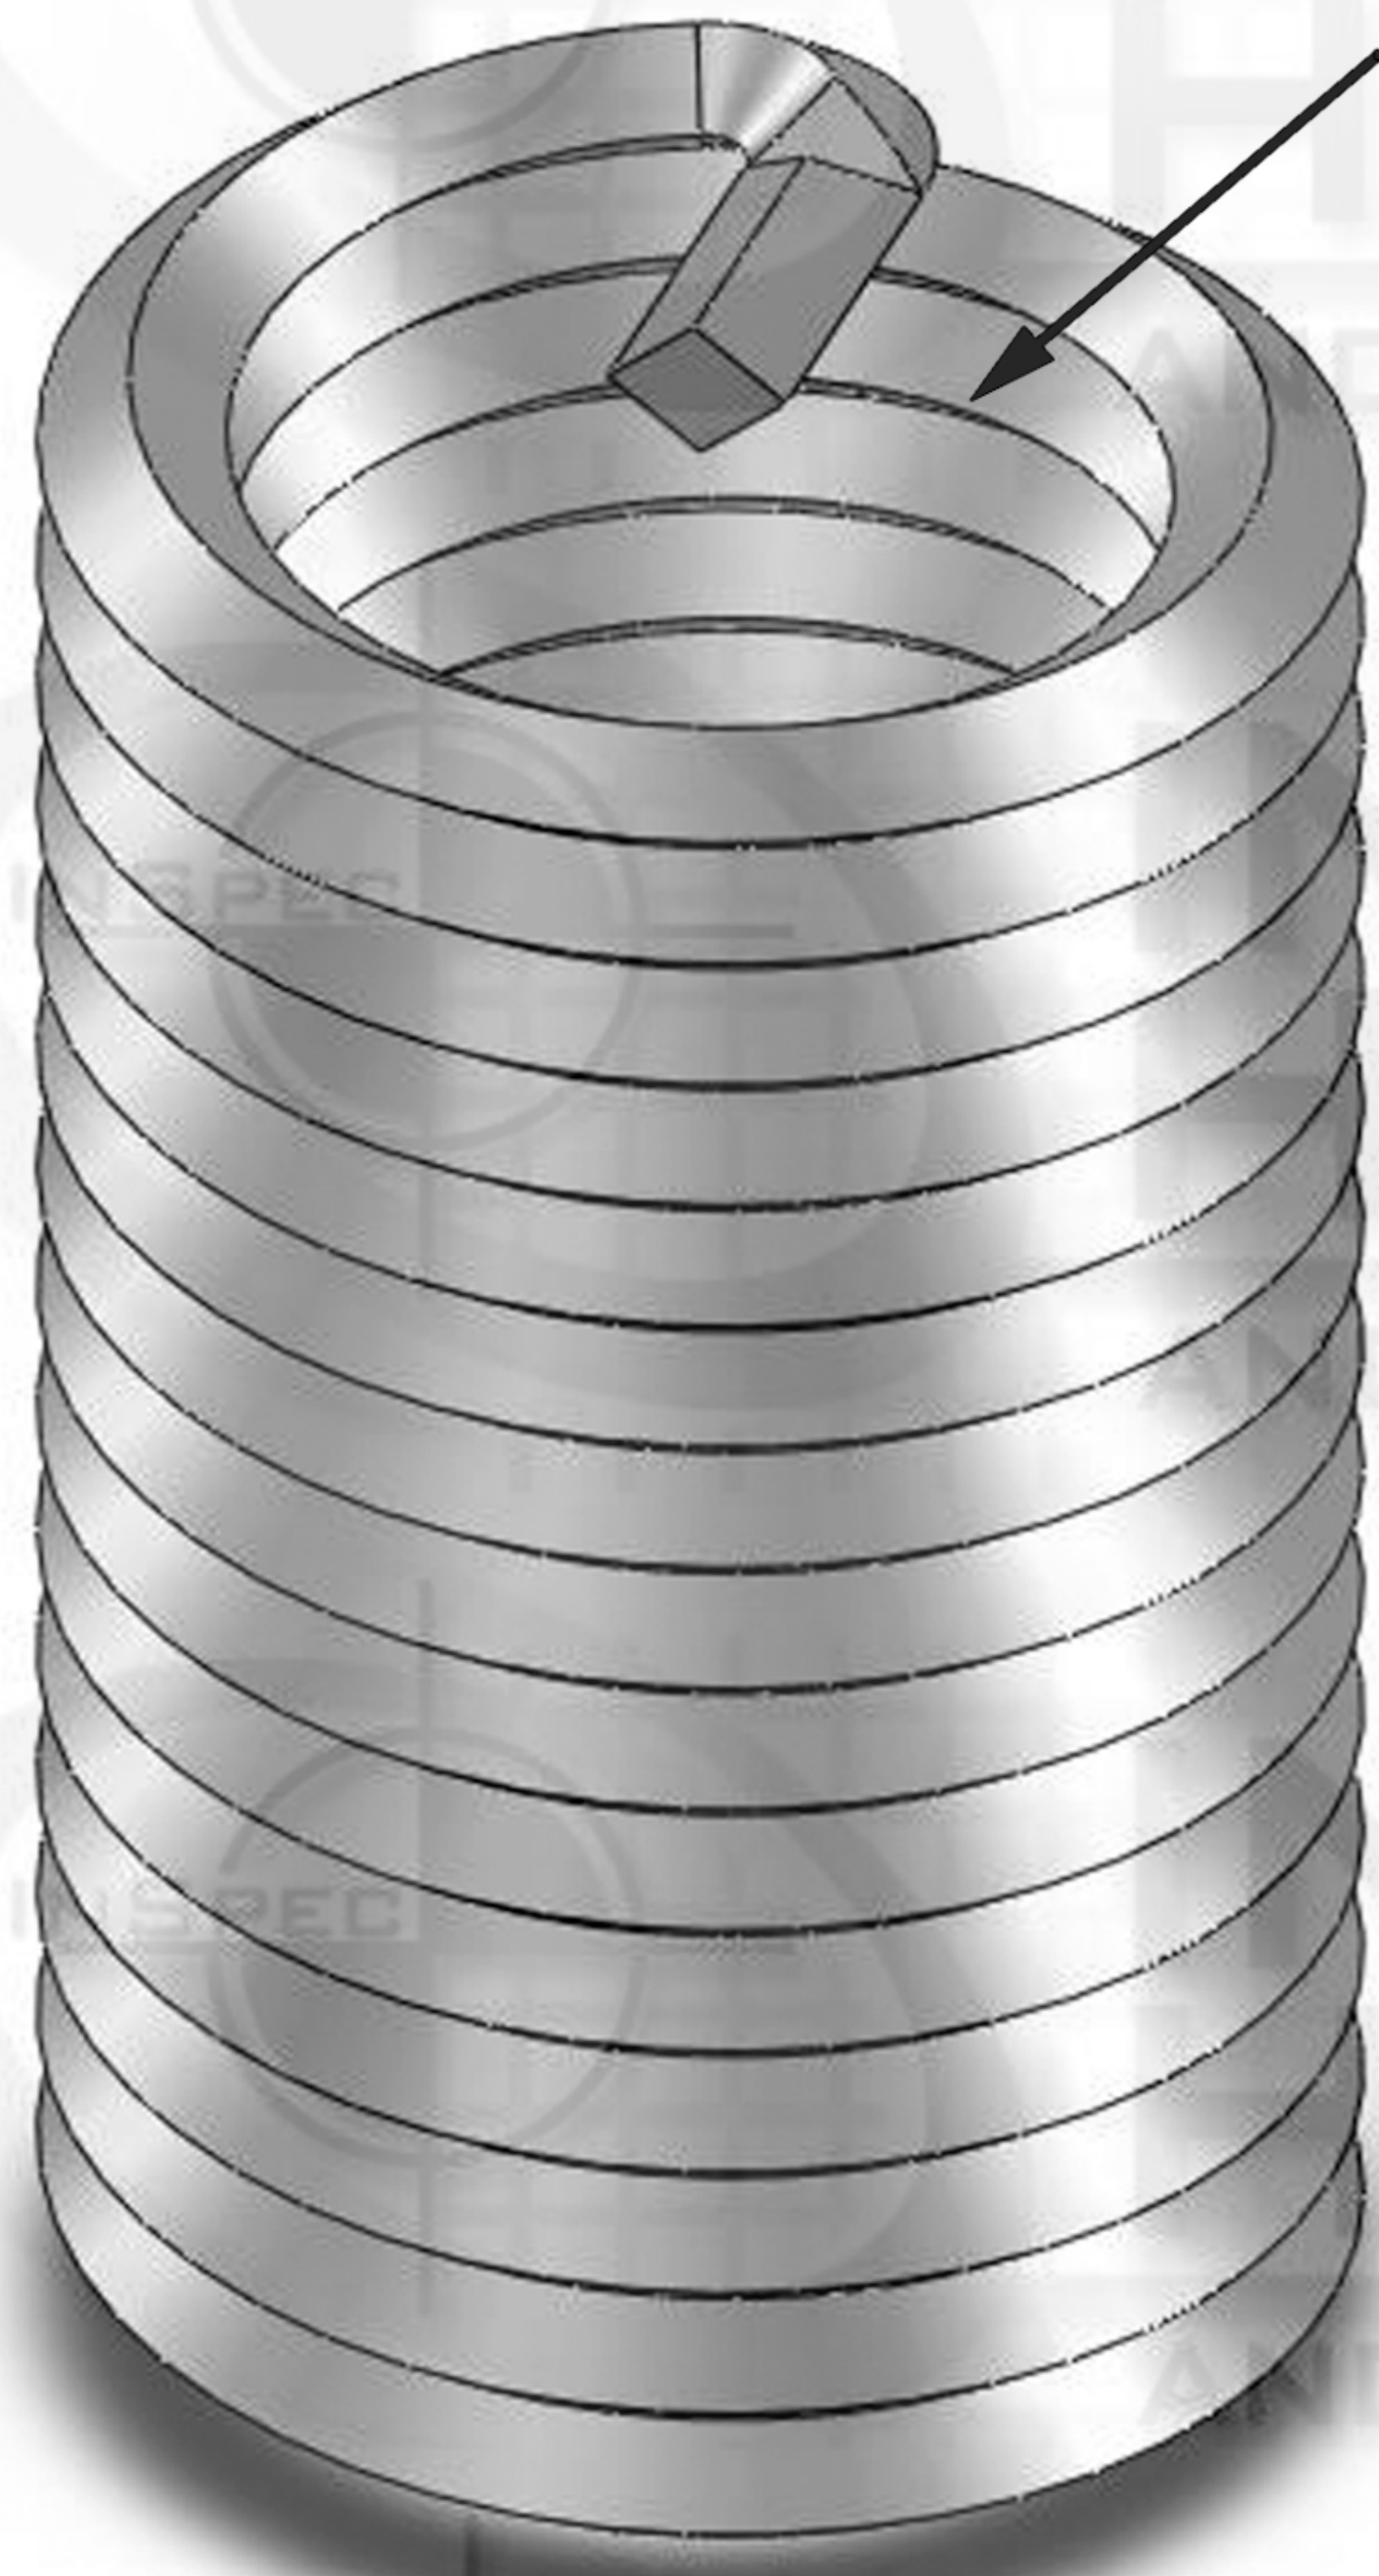

3.75

Suggested Drill Bit Size 2.5000 (2-1/2)



ZONE	REV.	REVISIONS		DATE	APPROVED
		DESCRIPTION			

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

NAME	DATE
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

NEXT ASSY	USED ON	TH. STANDARD: ANSI/ASME ACRONYM: 8UN ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8
APPLICATION	DO NOT SCALE DRAWING	PART NUMBER 35L7C-C8KP-250



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.48	SHEET 1 OF 1