




WireSert Locking

REVISIONS		DATE	APPROVED
ZONE	REV.	DESCRIPTION	

Diameter Thread Pitch

M20 x 2

Tang

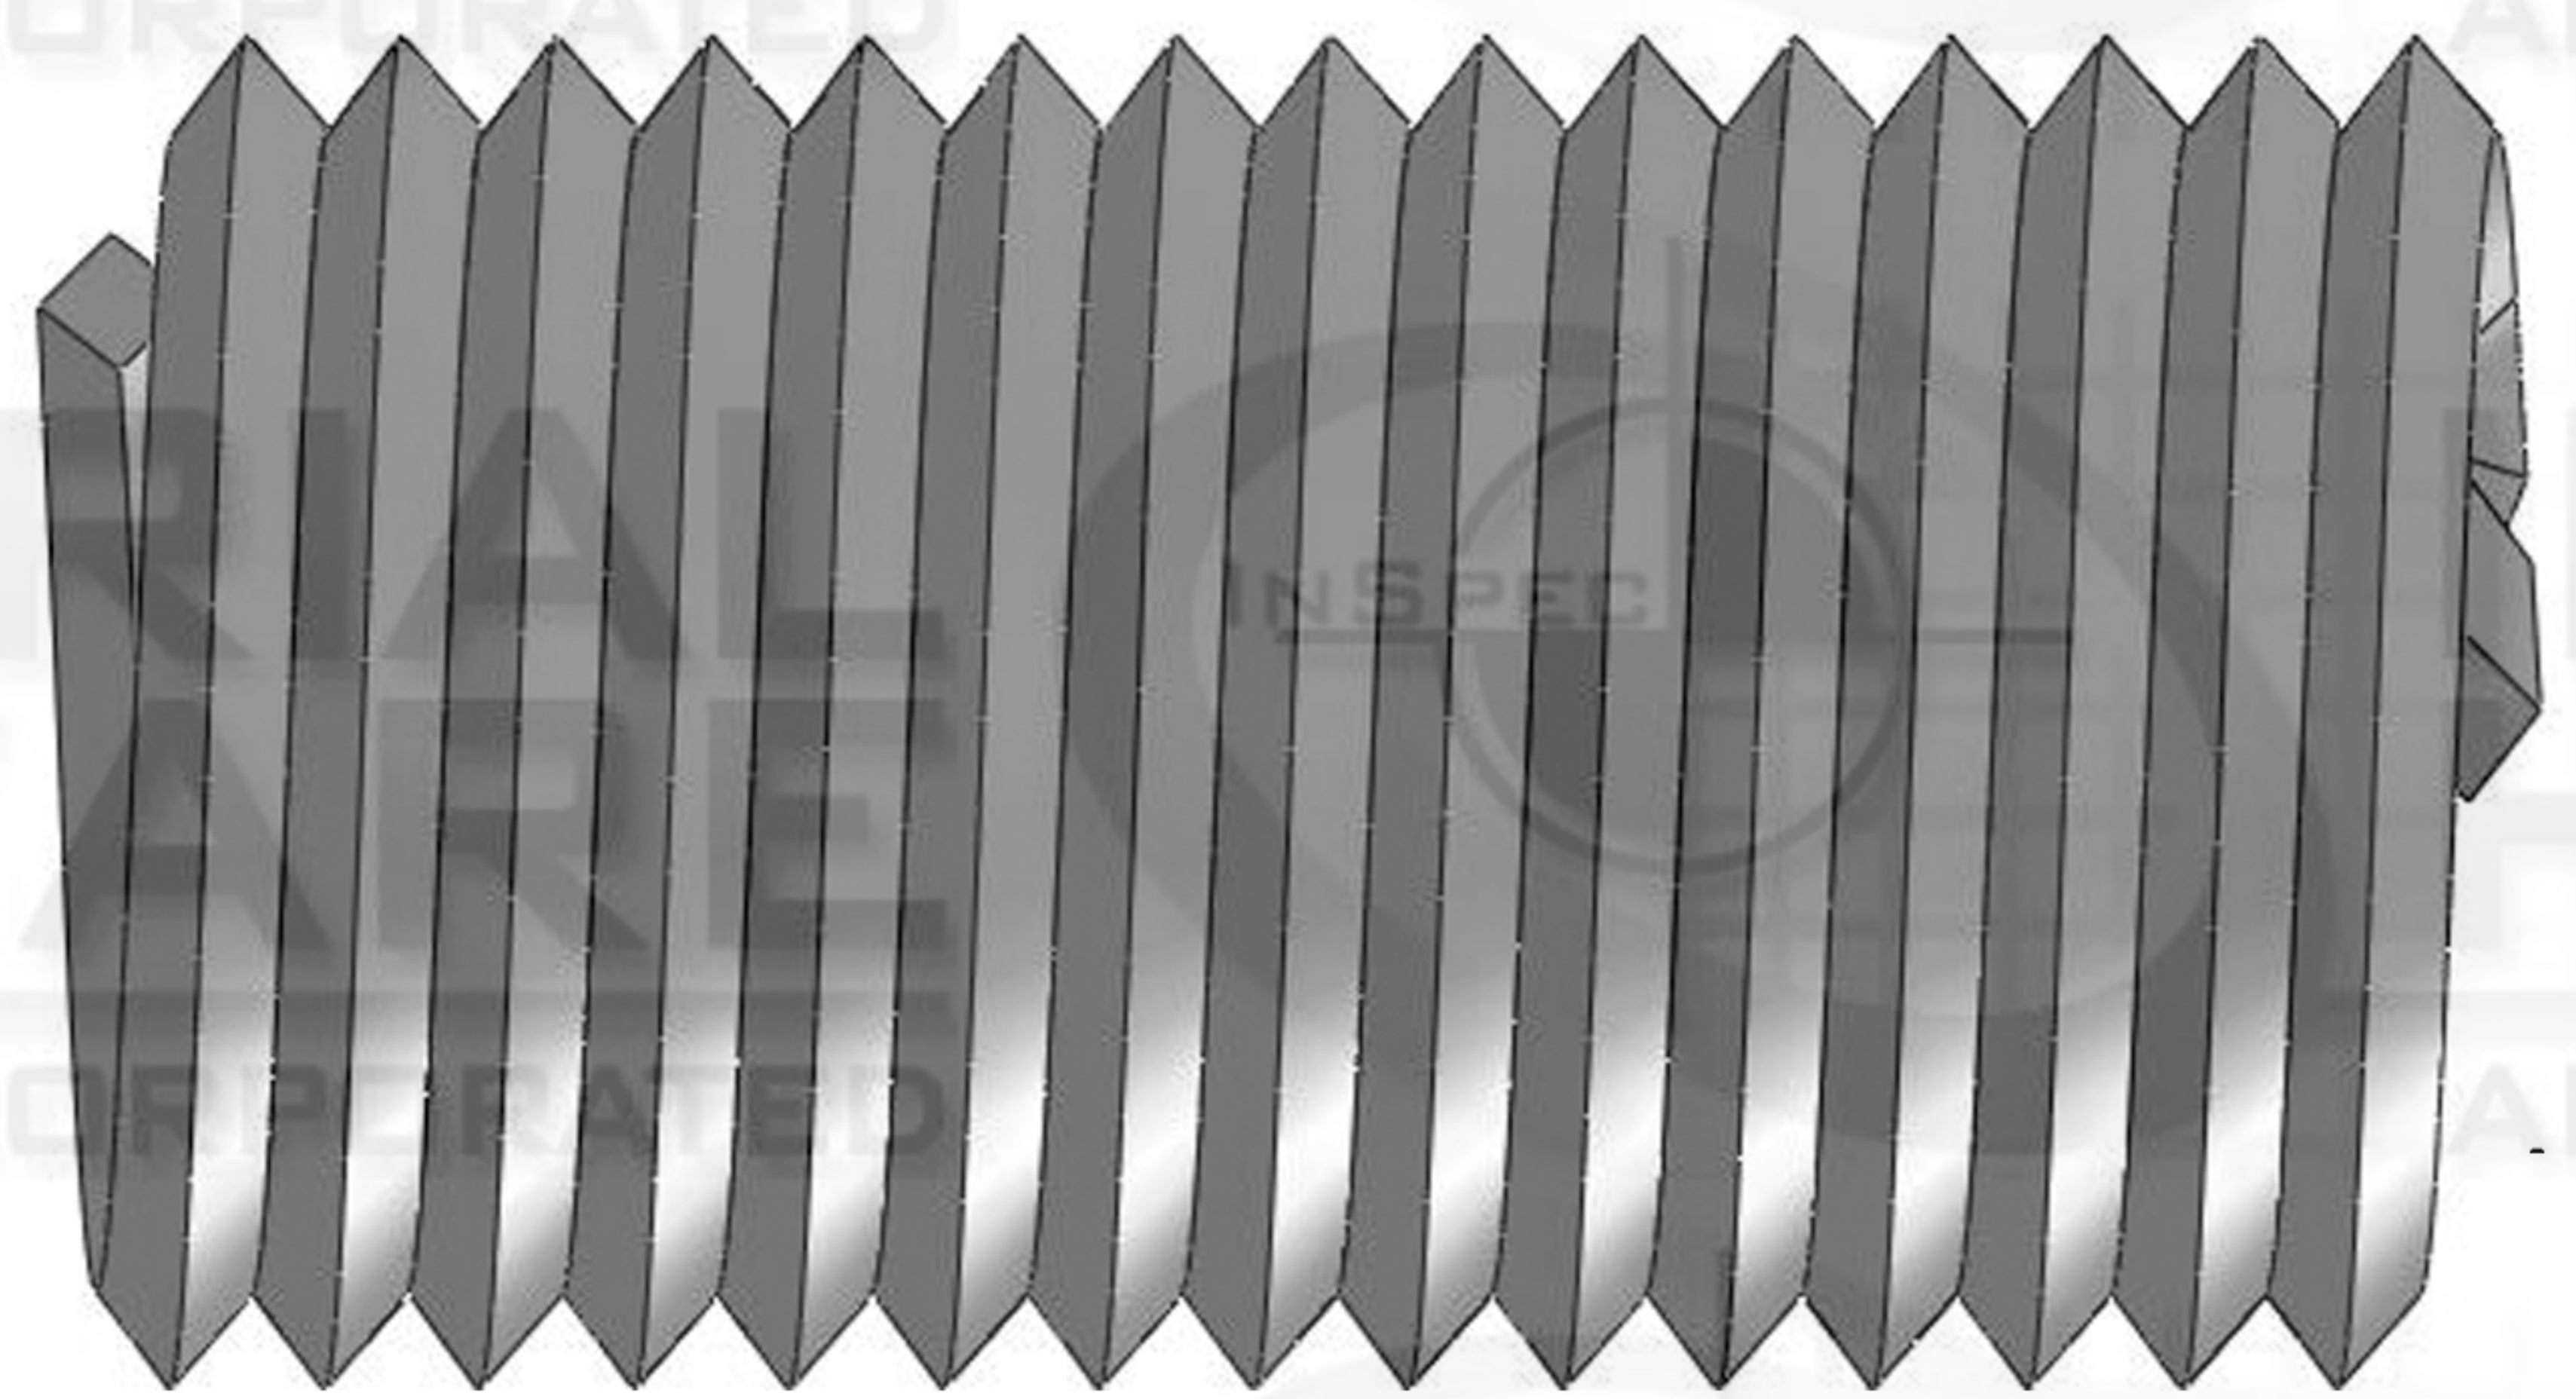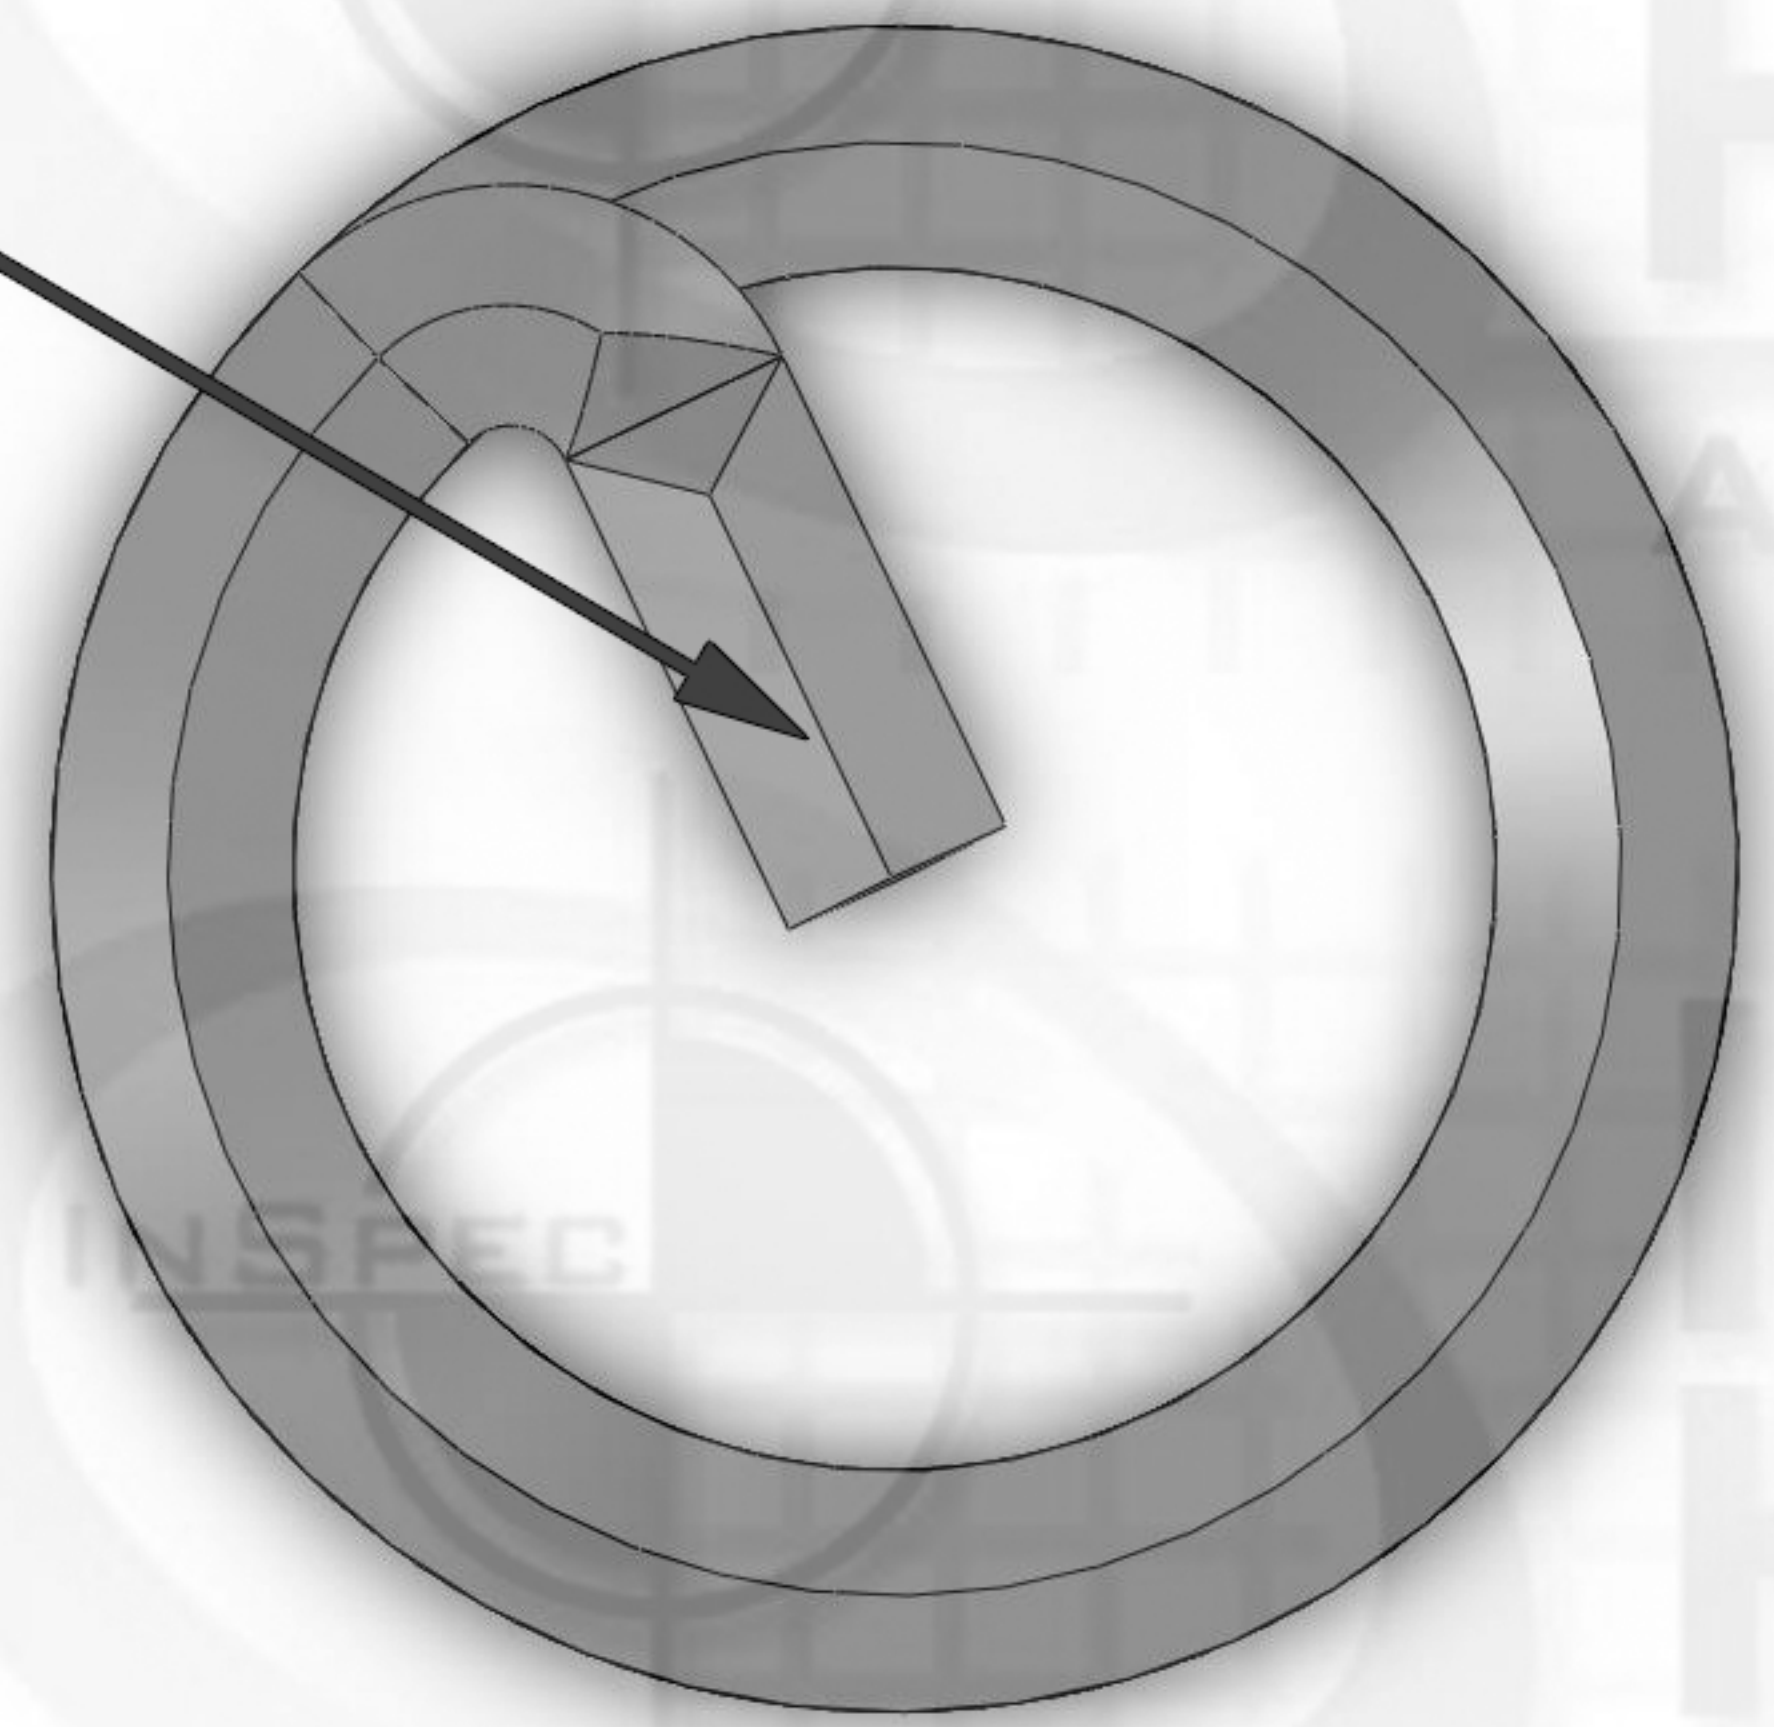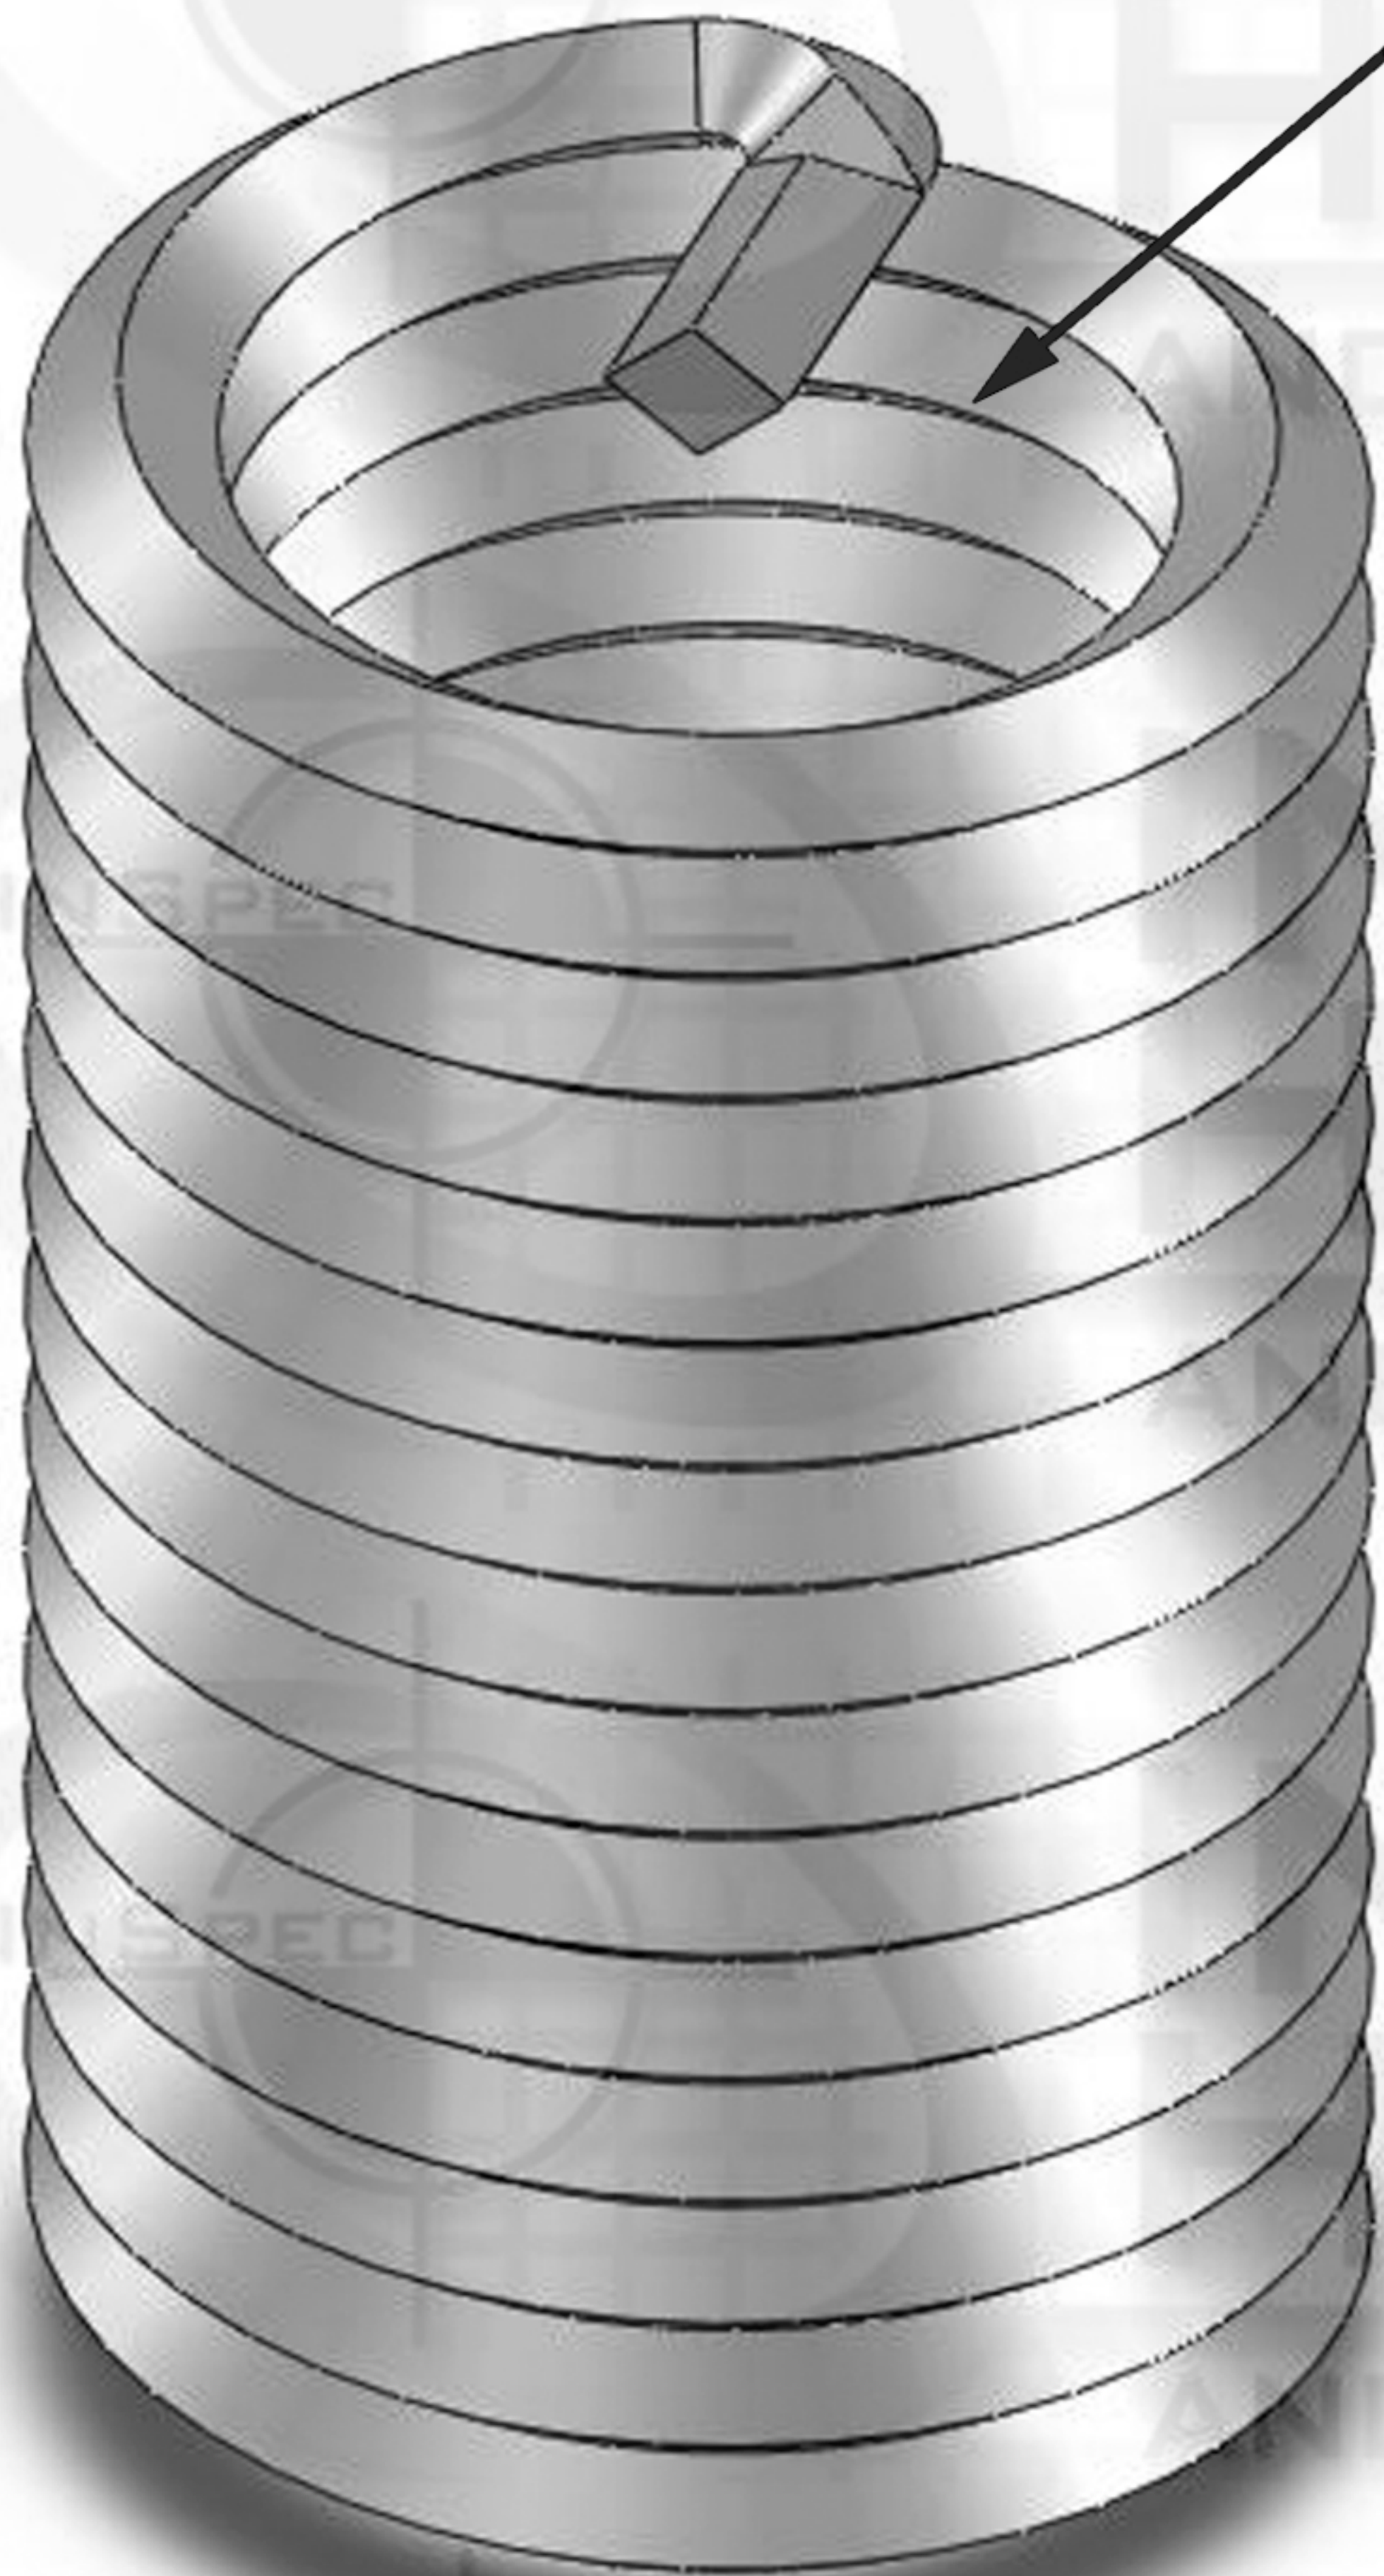

40mm

Suggested Drill Bit Size 0.8125 (13/16)



PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
				DRAWN	
				CHECKED	
				ENG APPR.	
				MFG APPR.	
				Q.A.	
				COMMENTS:	
NEXT ASSY	USED ON	PART NUMBER 35L7C-C8M2-C20N20-0F			
		MATERIAL FINISH Stainless Steel 18-8			
		TH. STANDARD: ISO Metric ACRONYM: ISO ROTATION: Right-Hand AEROSPACE MA3329-223			
		APPLICATION DO NOT SCALE DRAWING			



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

SIZE	DWG. NO.	REV.
A		
SCALE: 1:8	WEIGHT: 0.7	SHEET 1 OF 1