
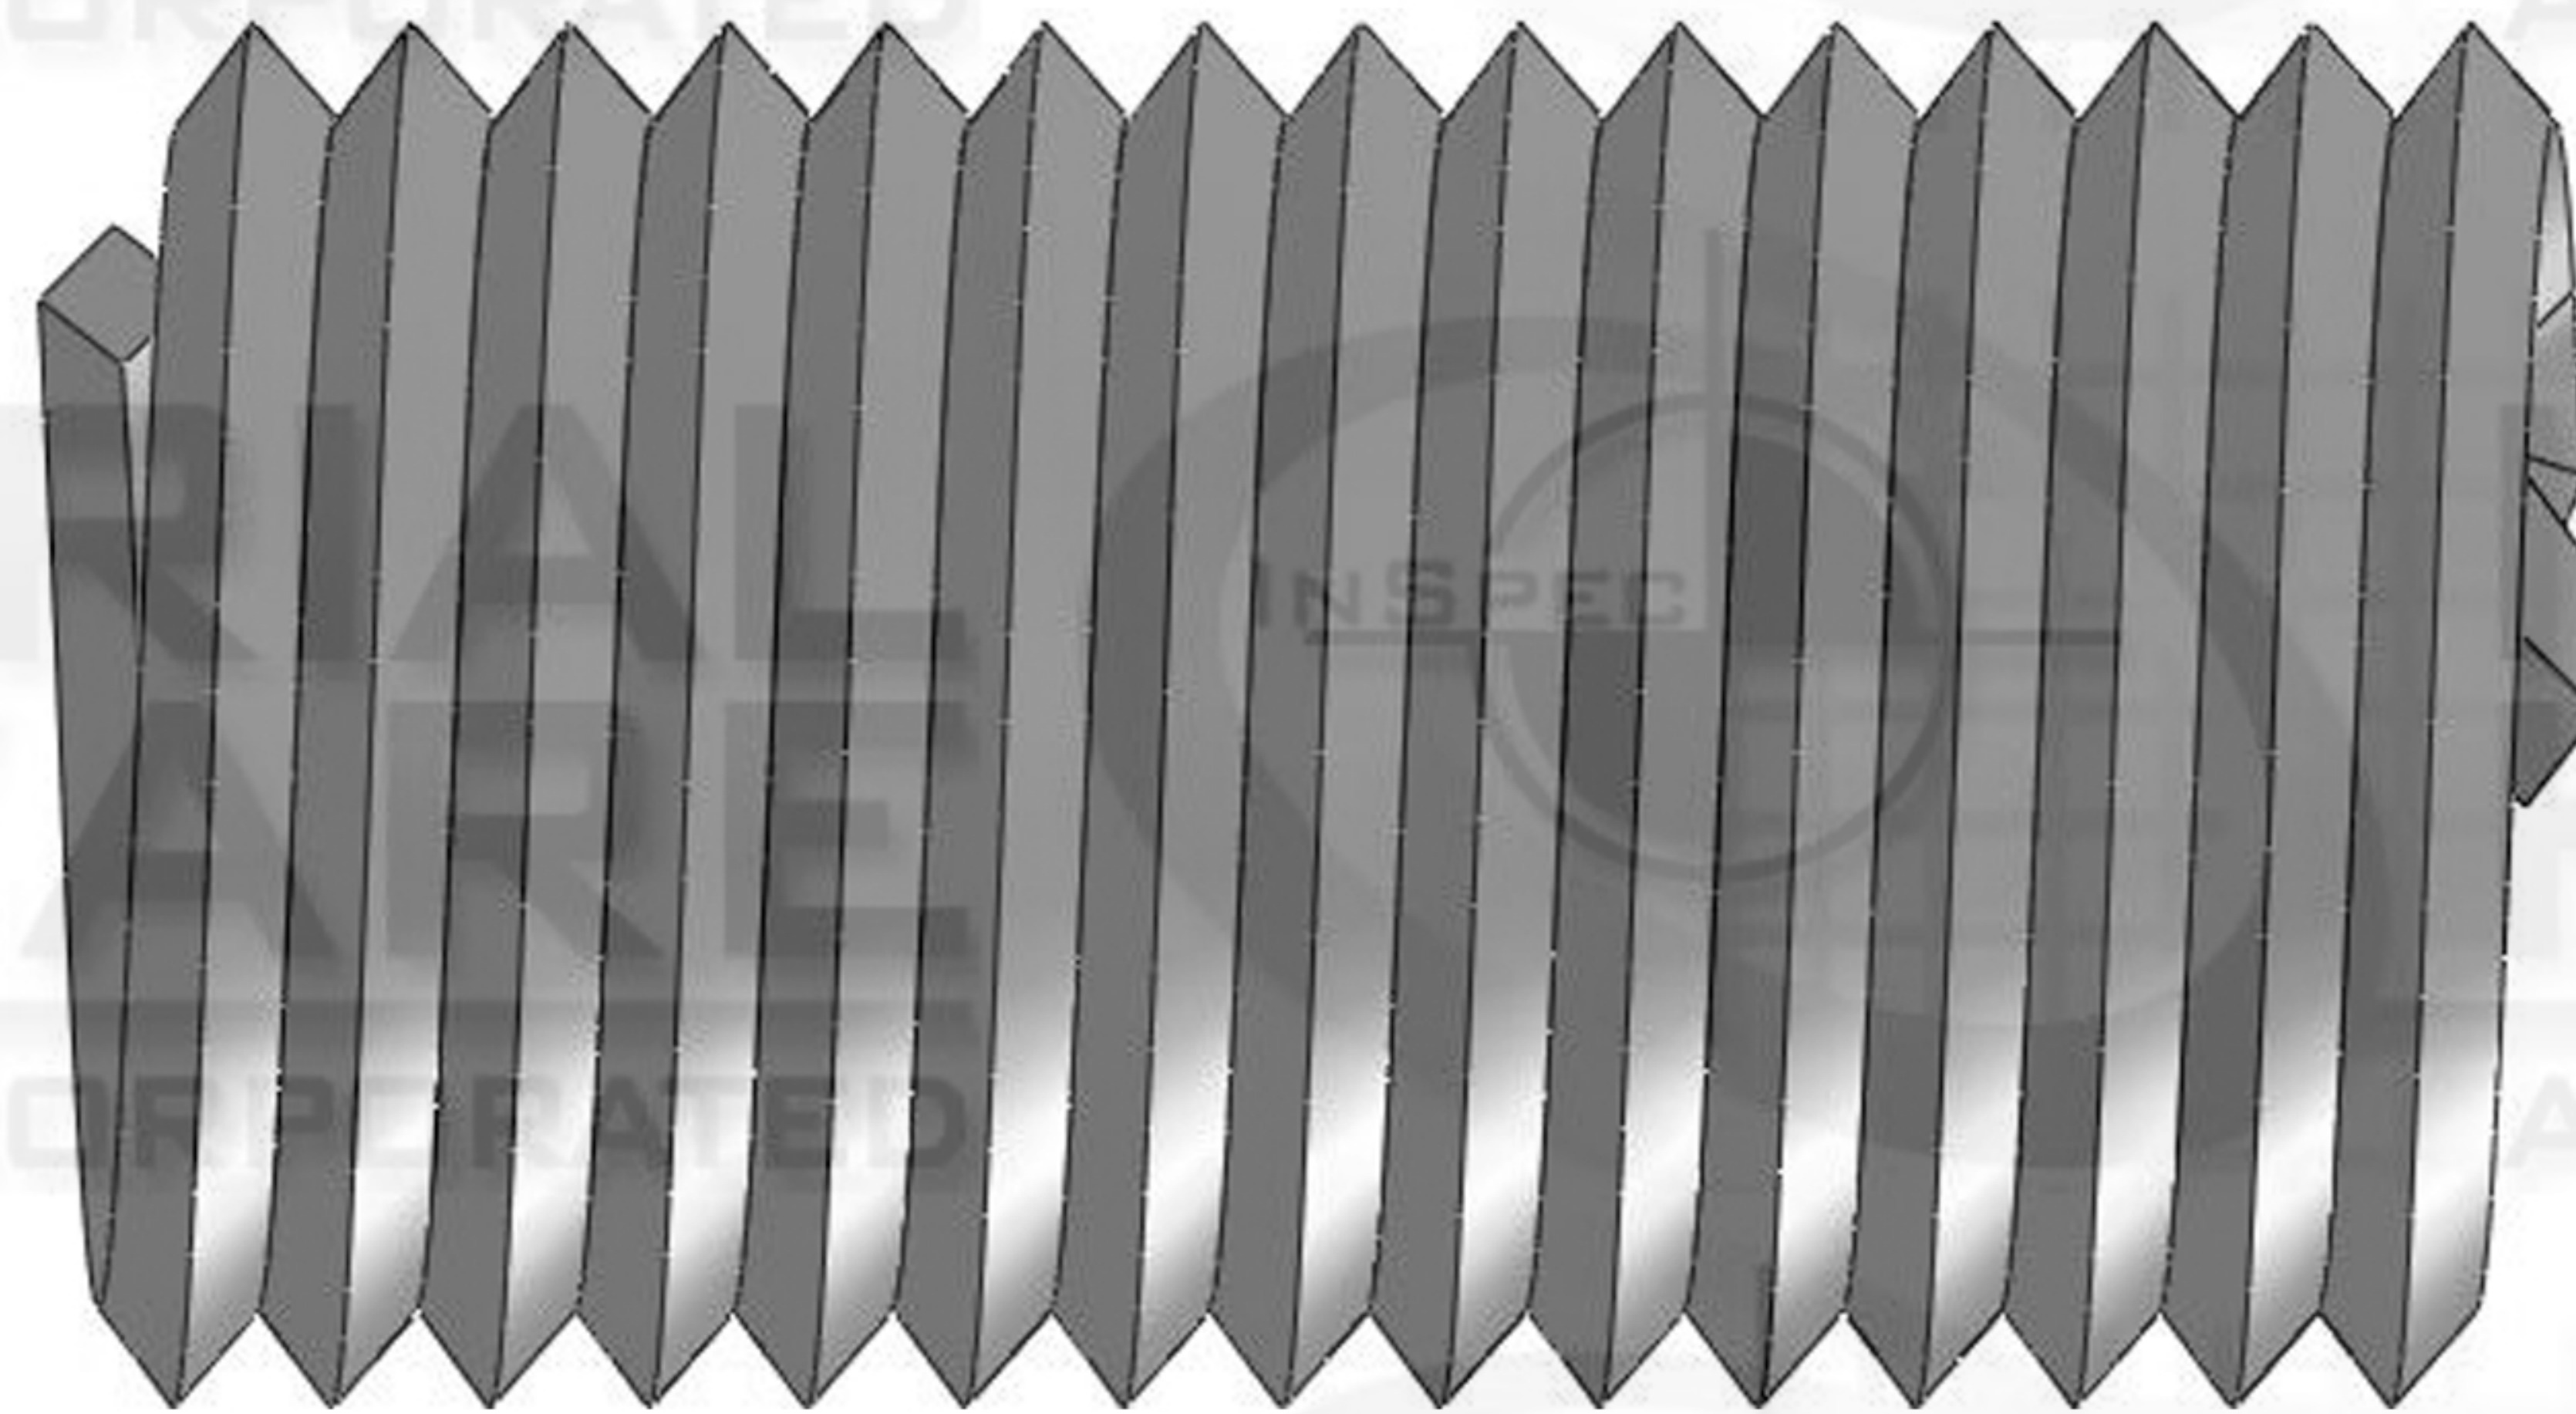
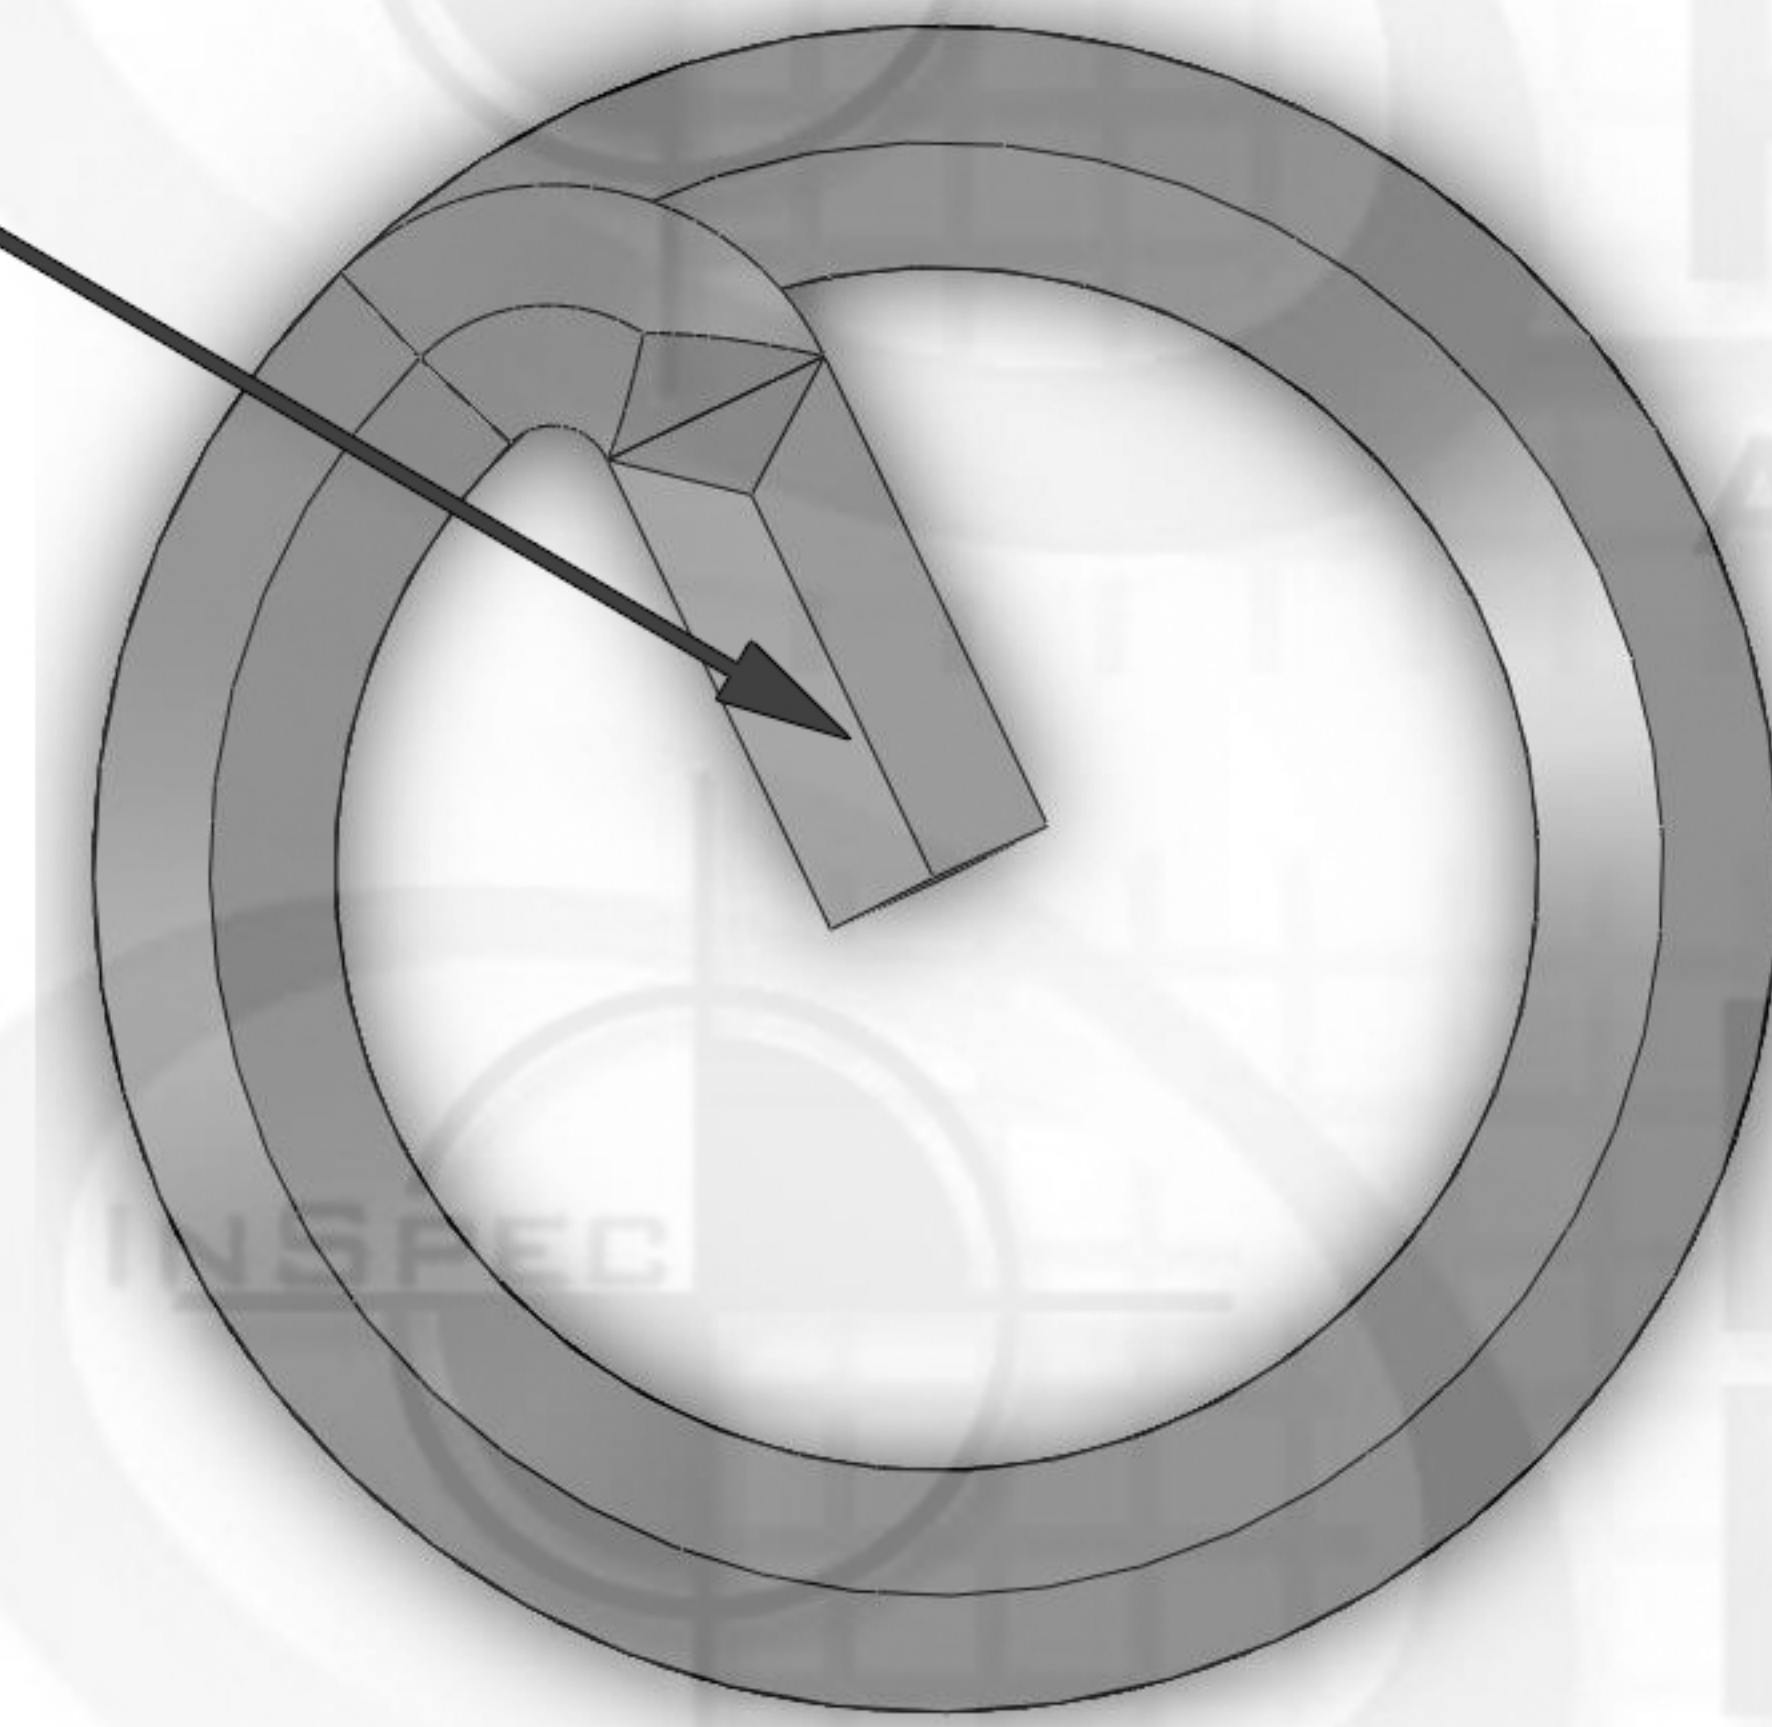


# WireSert Locking

Diameter Thread Pitch

M24 x 2

Tang

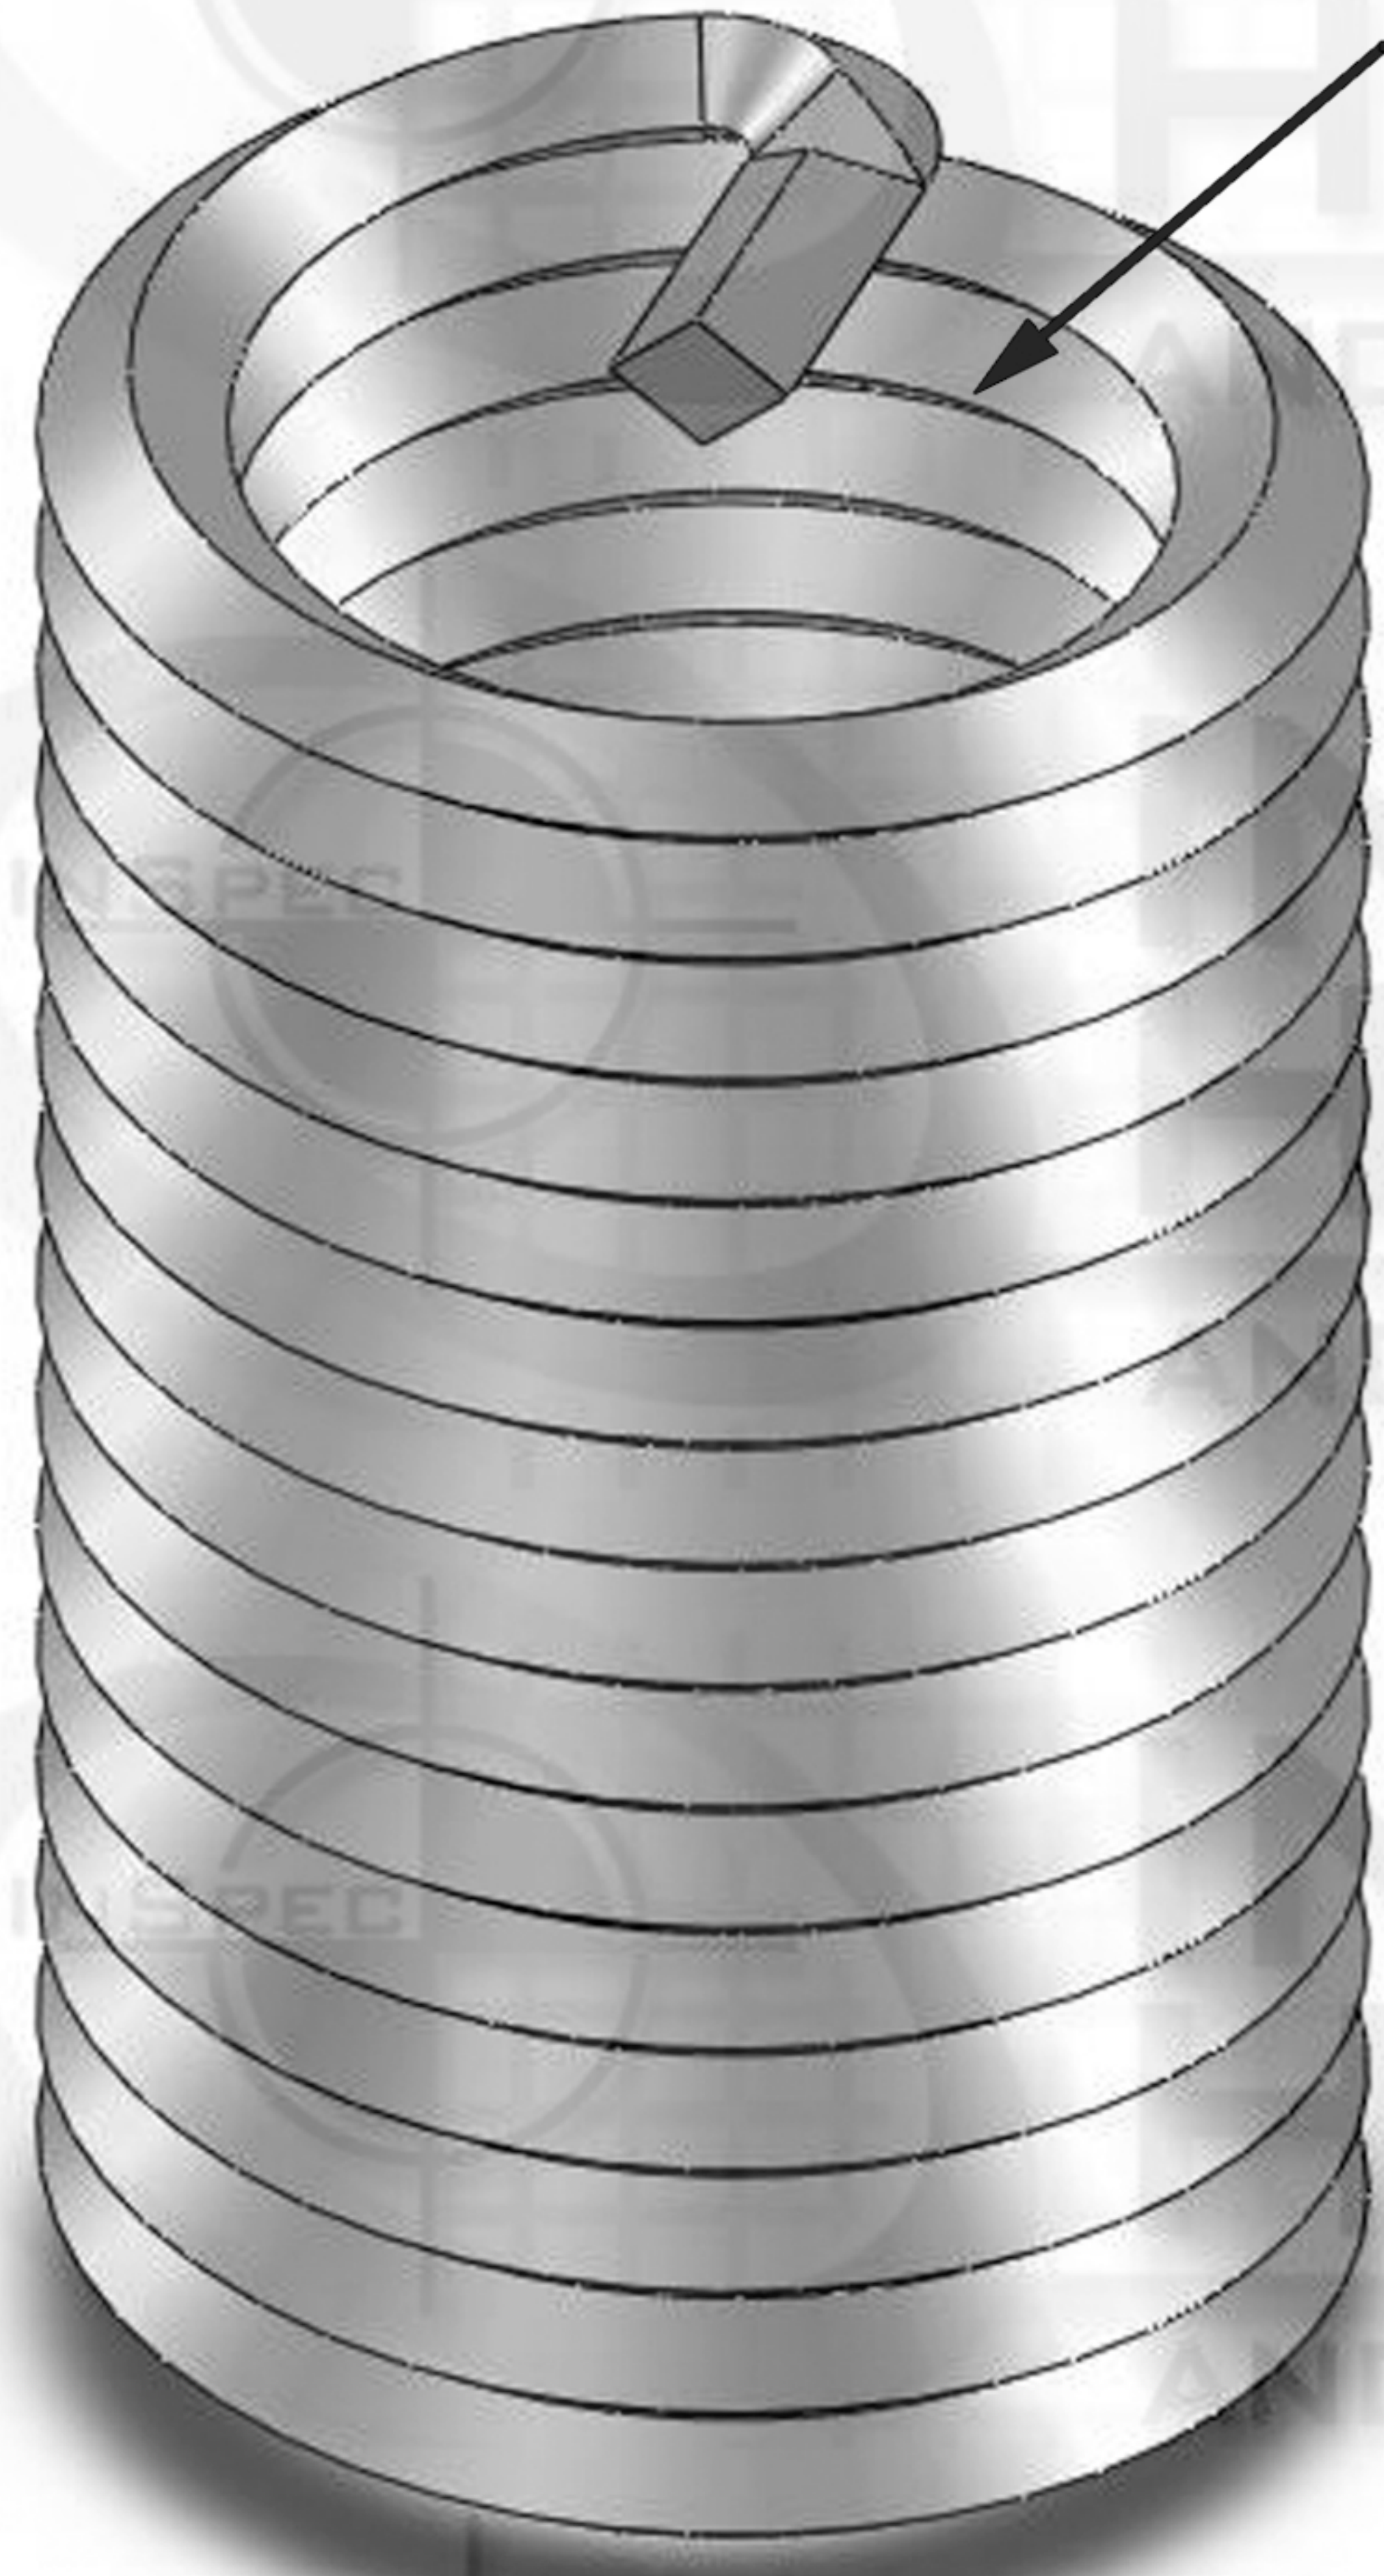

24mm

Suggested Drill Bit Size 0.9688 (31/32)



## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

					NAME	DATE
					DRAWN	
					CHECKED	
					ENG APPR.	
					MFG APPR.	
					Q.A.	
					COMMENTS:	
NEXT ASSY	USED ON	AEROSPACE MA3329-128	TH. STANDARD: ISO Metric ACRONYM: ISO ROTATION: Right-Hand MATERIAL FINISH Stainless Steel 18-8	PART NUMBER 35L7C-C8M2-C24N10-0F		
APPLICATION			DO NOT SCALE DRAWING			

REVISIONS			DATE	APPROVED
ZONE	REV.	DESCRIPTION		

**INDUSTRIAL HARDWARE  
AND SPECIALTIES INCORPORATED**

17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE: 1:8	WEIGHT: 0.5	SHEET 1 OF 1