Key-Locking Internal Locking

		REVISIONS		
ZONE	REV.	DESCRIPTION	DATE	APPROVED

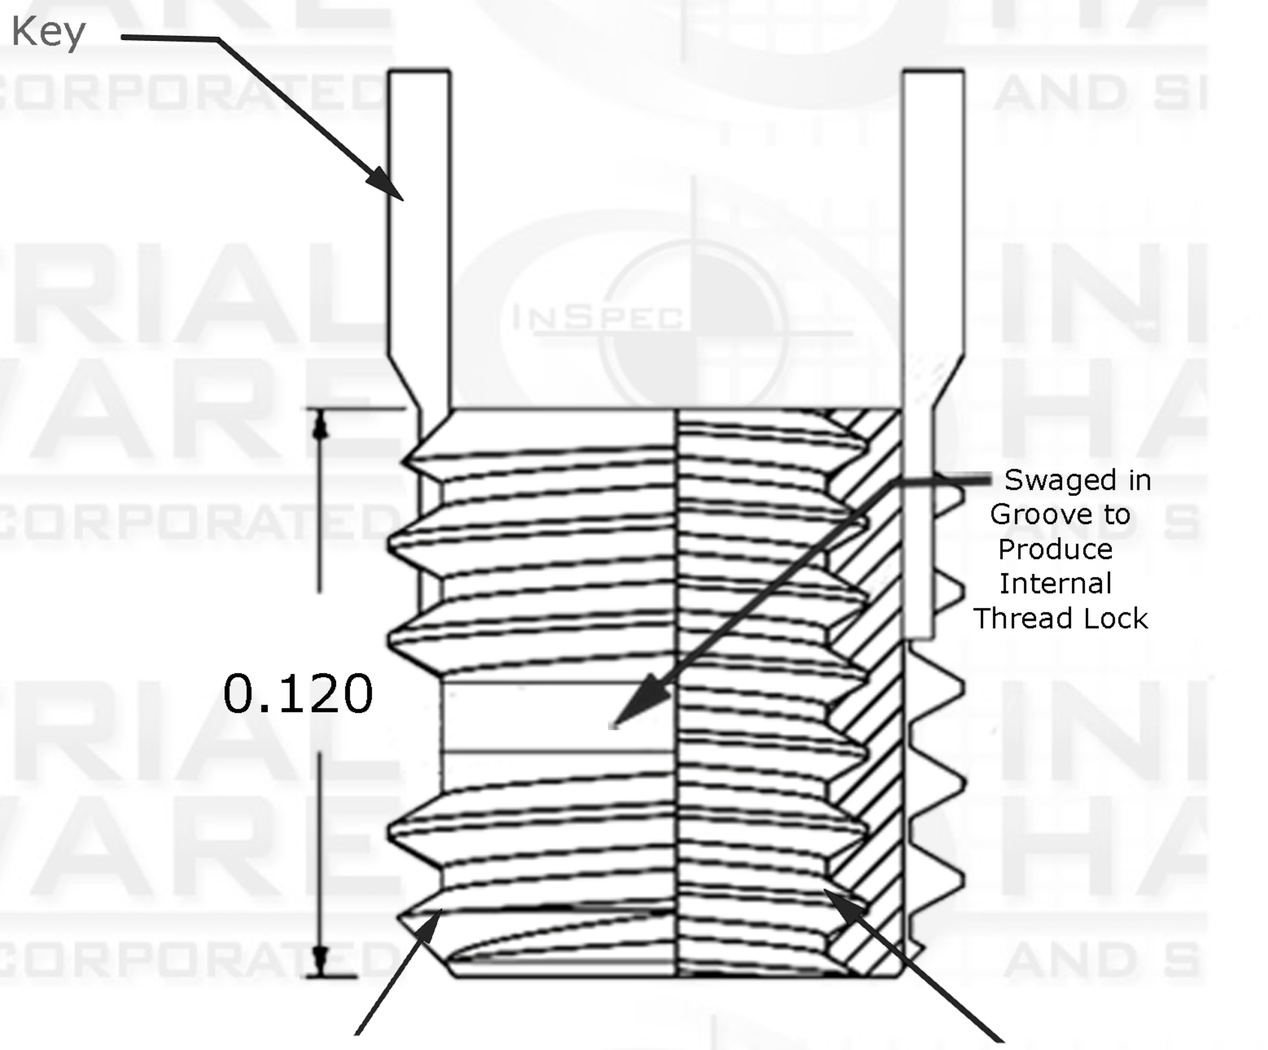

External Thread Pitch
8-32

Internal Thread Pitch
2-56

Suggested Drill Bit Size

0.1360 (#29)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

NEXT ASSY	USED ON
APPLICATION	

Internal
TH. STANDARD : ANSI/ASME
ACRONYM: UNC
ROTATION: Right-Hand

External
TH. STANDARD : ANSI/ASME
ACRONYM: UNC
ROTATION: Right-Hand

MATERIAL FINISH
Alloy Steel Type 4140

PART NUMBER
35L8C-361R-02-0A

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN		
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		

COMMENTS:

INDUSTRIAL HARDWARE AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		

SCALE:1:8 | WEIGHT: | SHEET 1 OF 1