


# Key-Locking Solid Tappable Core

		REVISIONS	DATE	APPROVED
ZONE	REV.	DESCRIPTION		



External Thread Pitch  
M20 x 1.5

Key

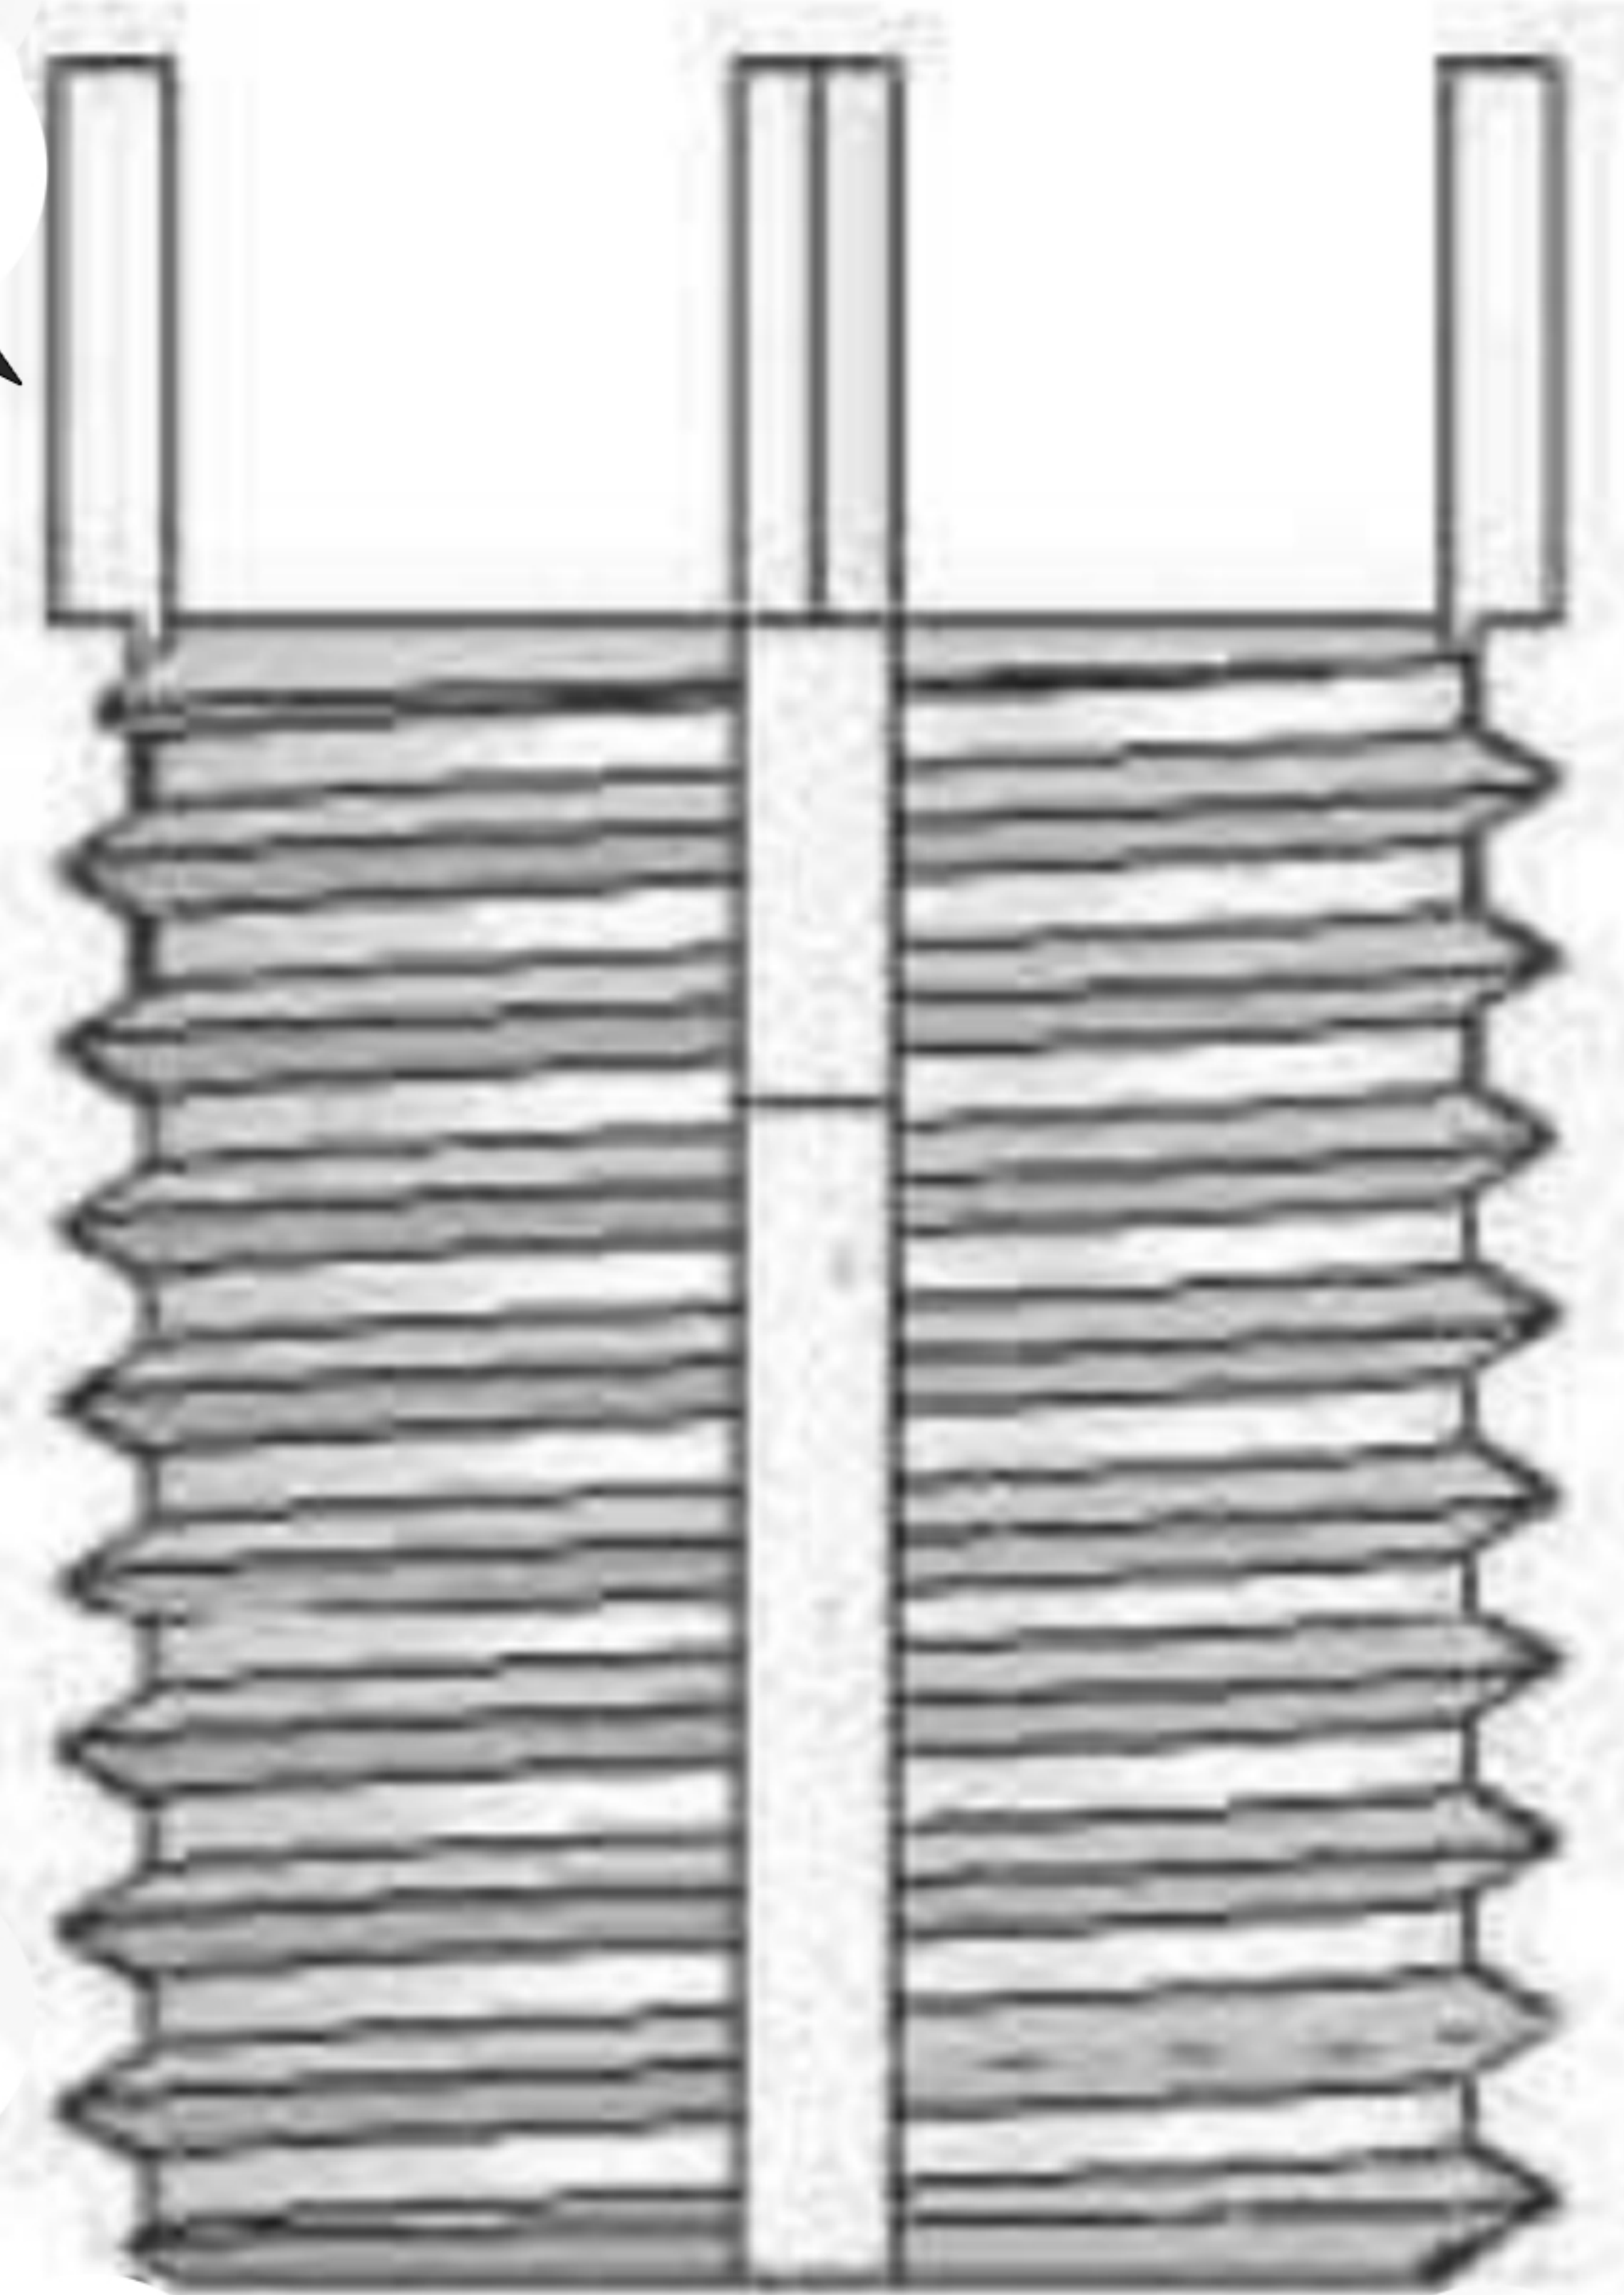

20mm

Suggested Drill Bit Size



0.7344 (47/64)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

				NAME	DATE
			DRAWN		
			CHECKED		
			ENG APPR.		
			MFG APPR.		
			Q.A.		
			COMMENTS:		
NEXT ASSY	USED ON	TH. STANDARD: ISO Metric ACRONYM: ISO ROTATION: Right-Hand MATERIAL FINISH Carbon Steel C1215 PART NUMBER 35L8C-4N08-18			
APPLICATION		DO NOT SCALE DRAWING			



**INDUSTRIAL HARDWARE**  
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1