

Key-Locking Solid Tappable Core


		REVISIONS			
ZONE	REV.	DESCRIPTION	DATE	APPROVED	



External Thread Pitch
M30 x 2

Key

30mm

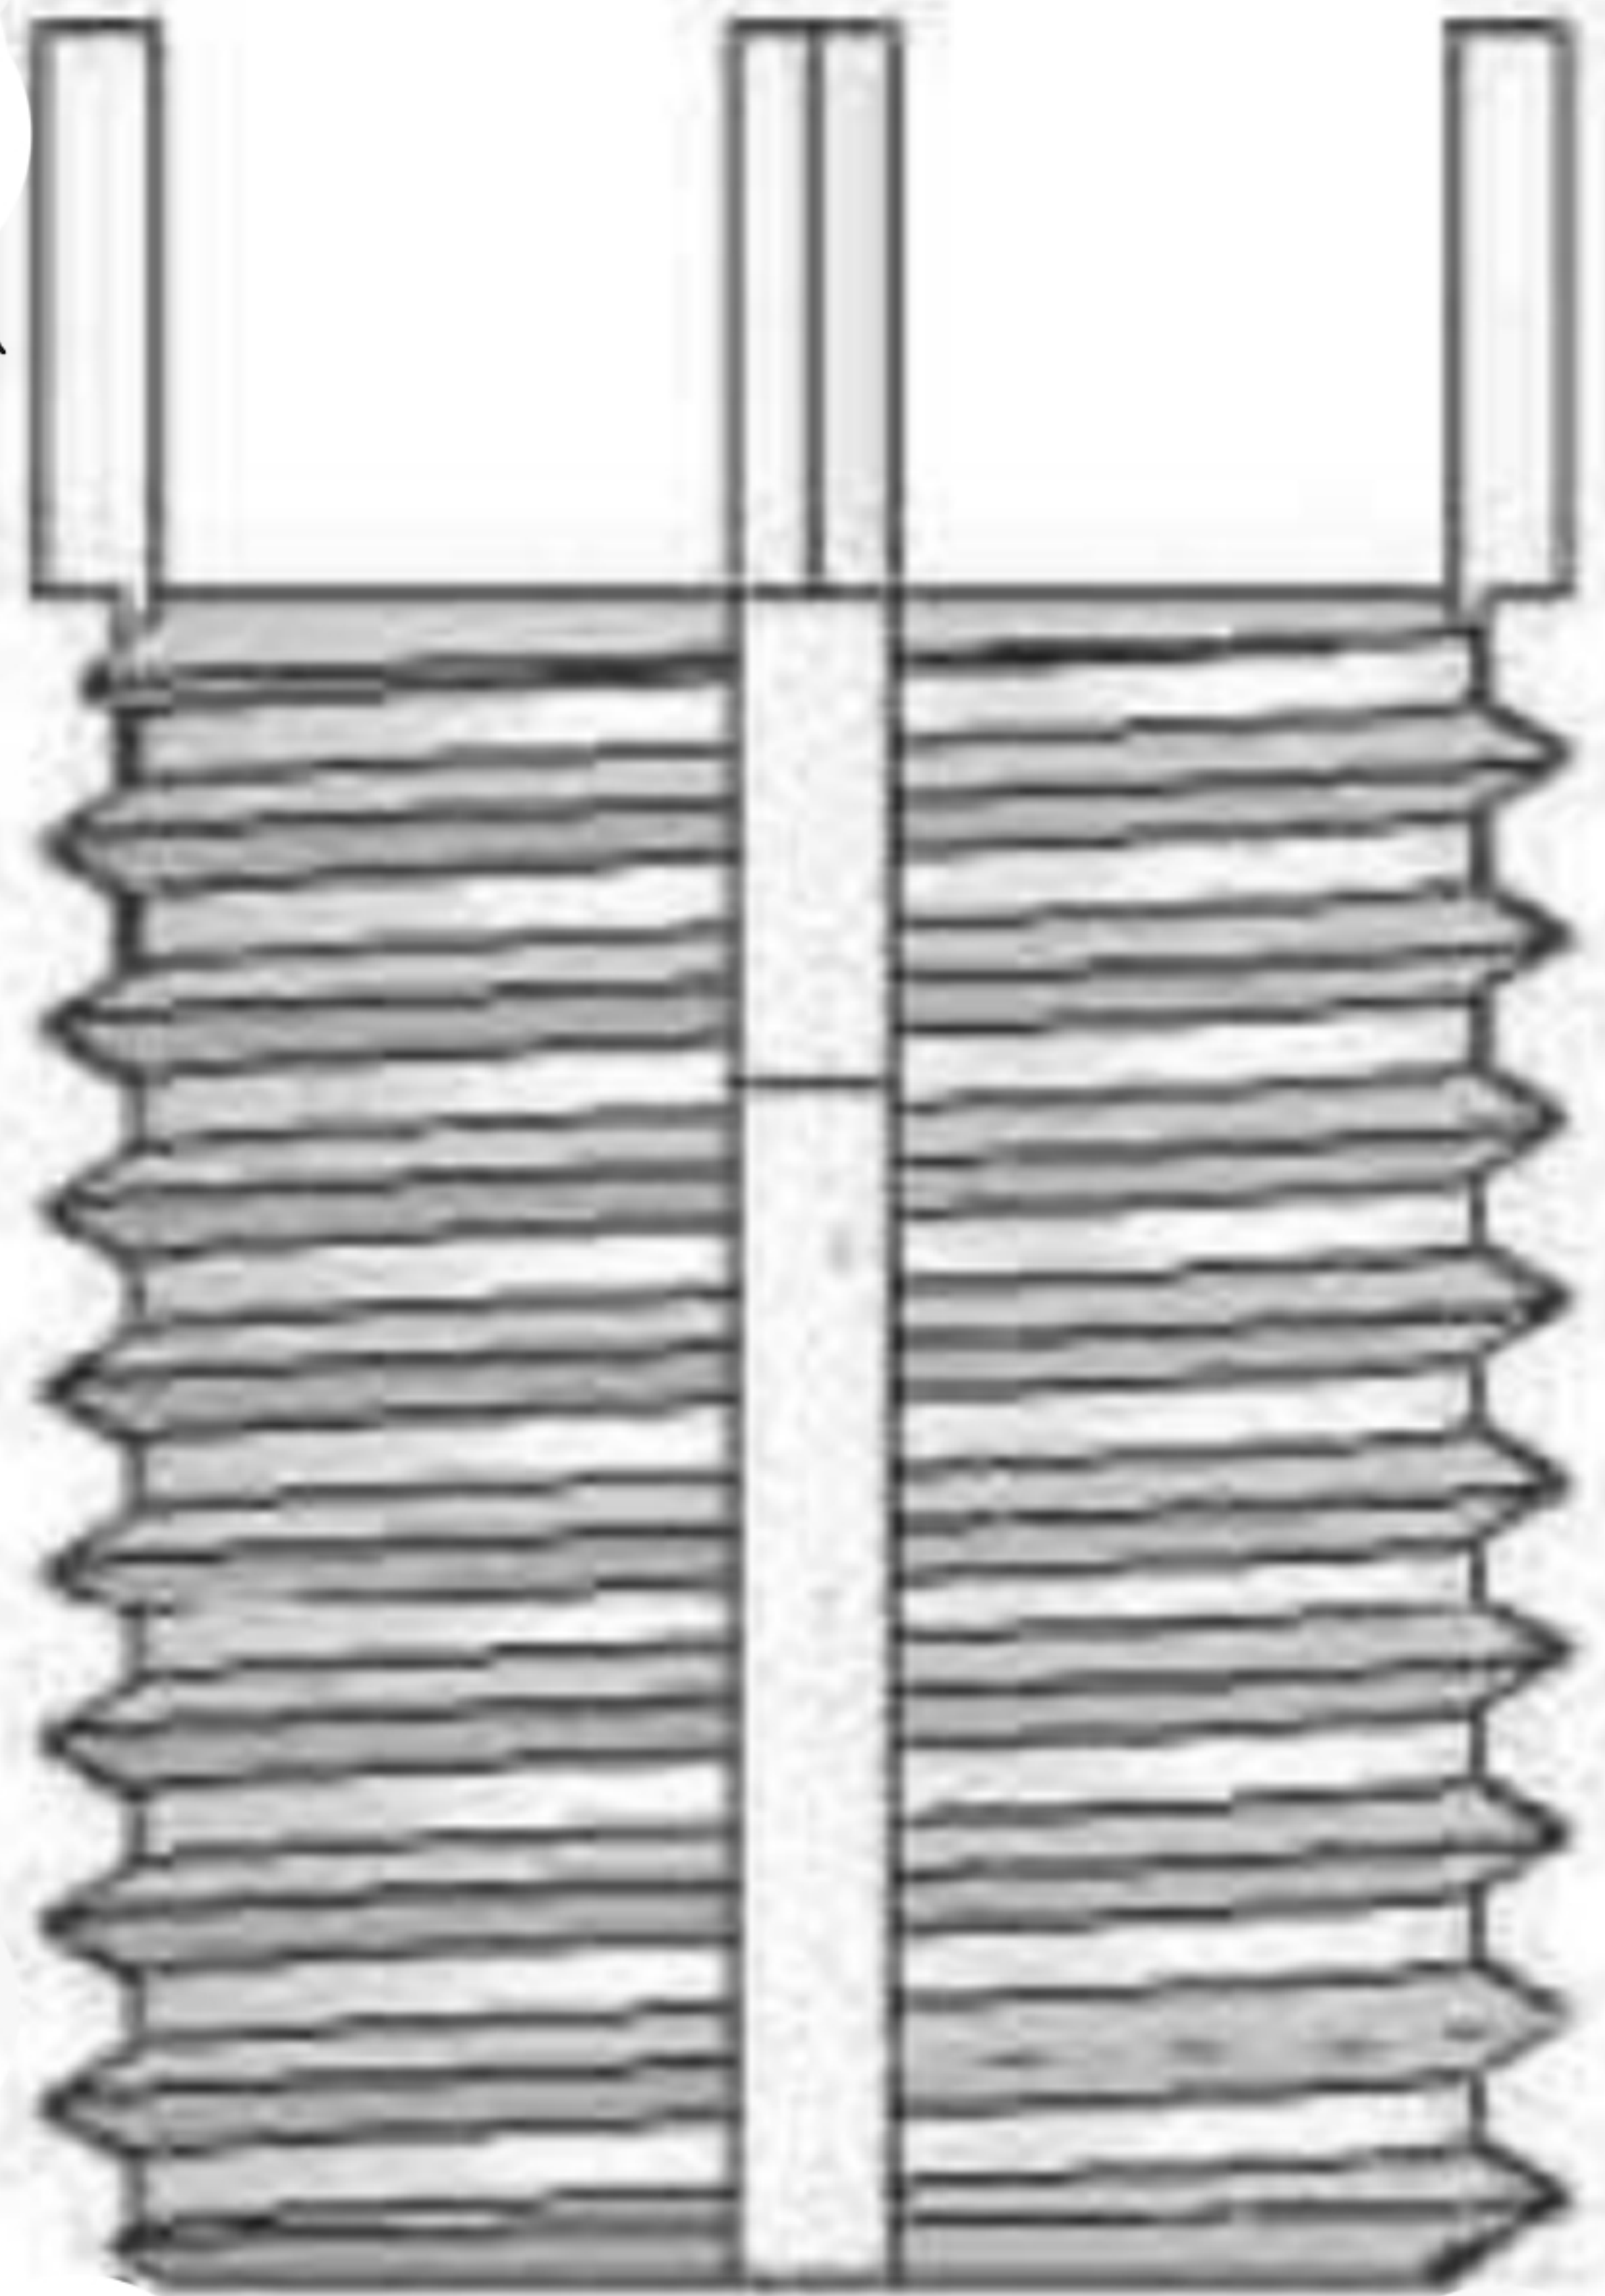

Suggested Drill Bit Size



1.0938 (1-3/32)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

		NAME	DATE
		DRAWN	
		CHECKED	
		ENG APPR.	
		MFG APPR.	
		Q.A.	
		COMMENTS:	
NEXT ASSY	USED ON		
		TH. STANDARD: ISO Metric	
		ACRONYM: ISO	
		ROTATION: Right-Hand	
		MATERIAL FINISH	
		Carbon Steel C1215	
		PART NUMBER	
		35L8C-4N08-24	
APPLICATION		DO NOT SCALE DRAWING	



17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1