


# Key-Locking Solid Tappable Core

		REVISIONS	DATE	APPROVED
ZONE	REV.	DESCRIPTION		



External Thread Pitch  
M12 x 1.25

Key

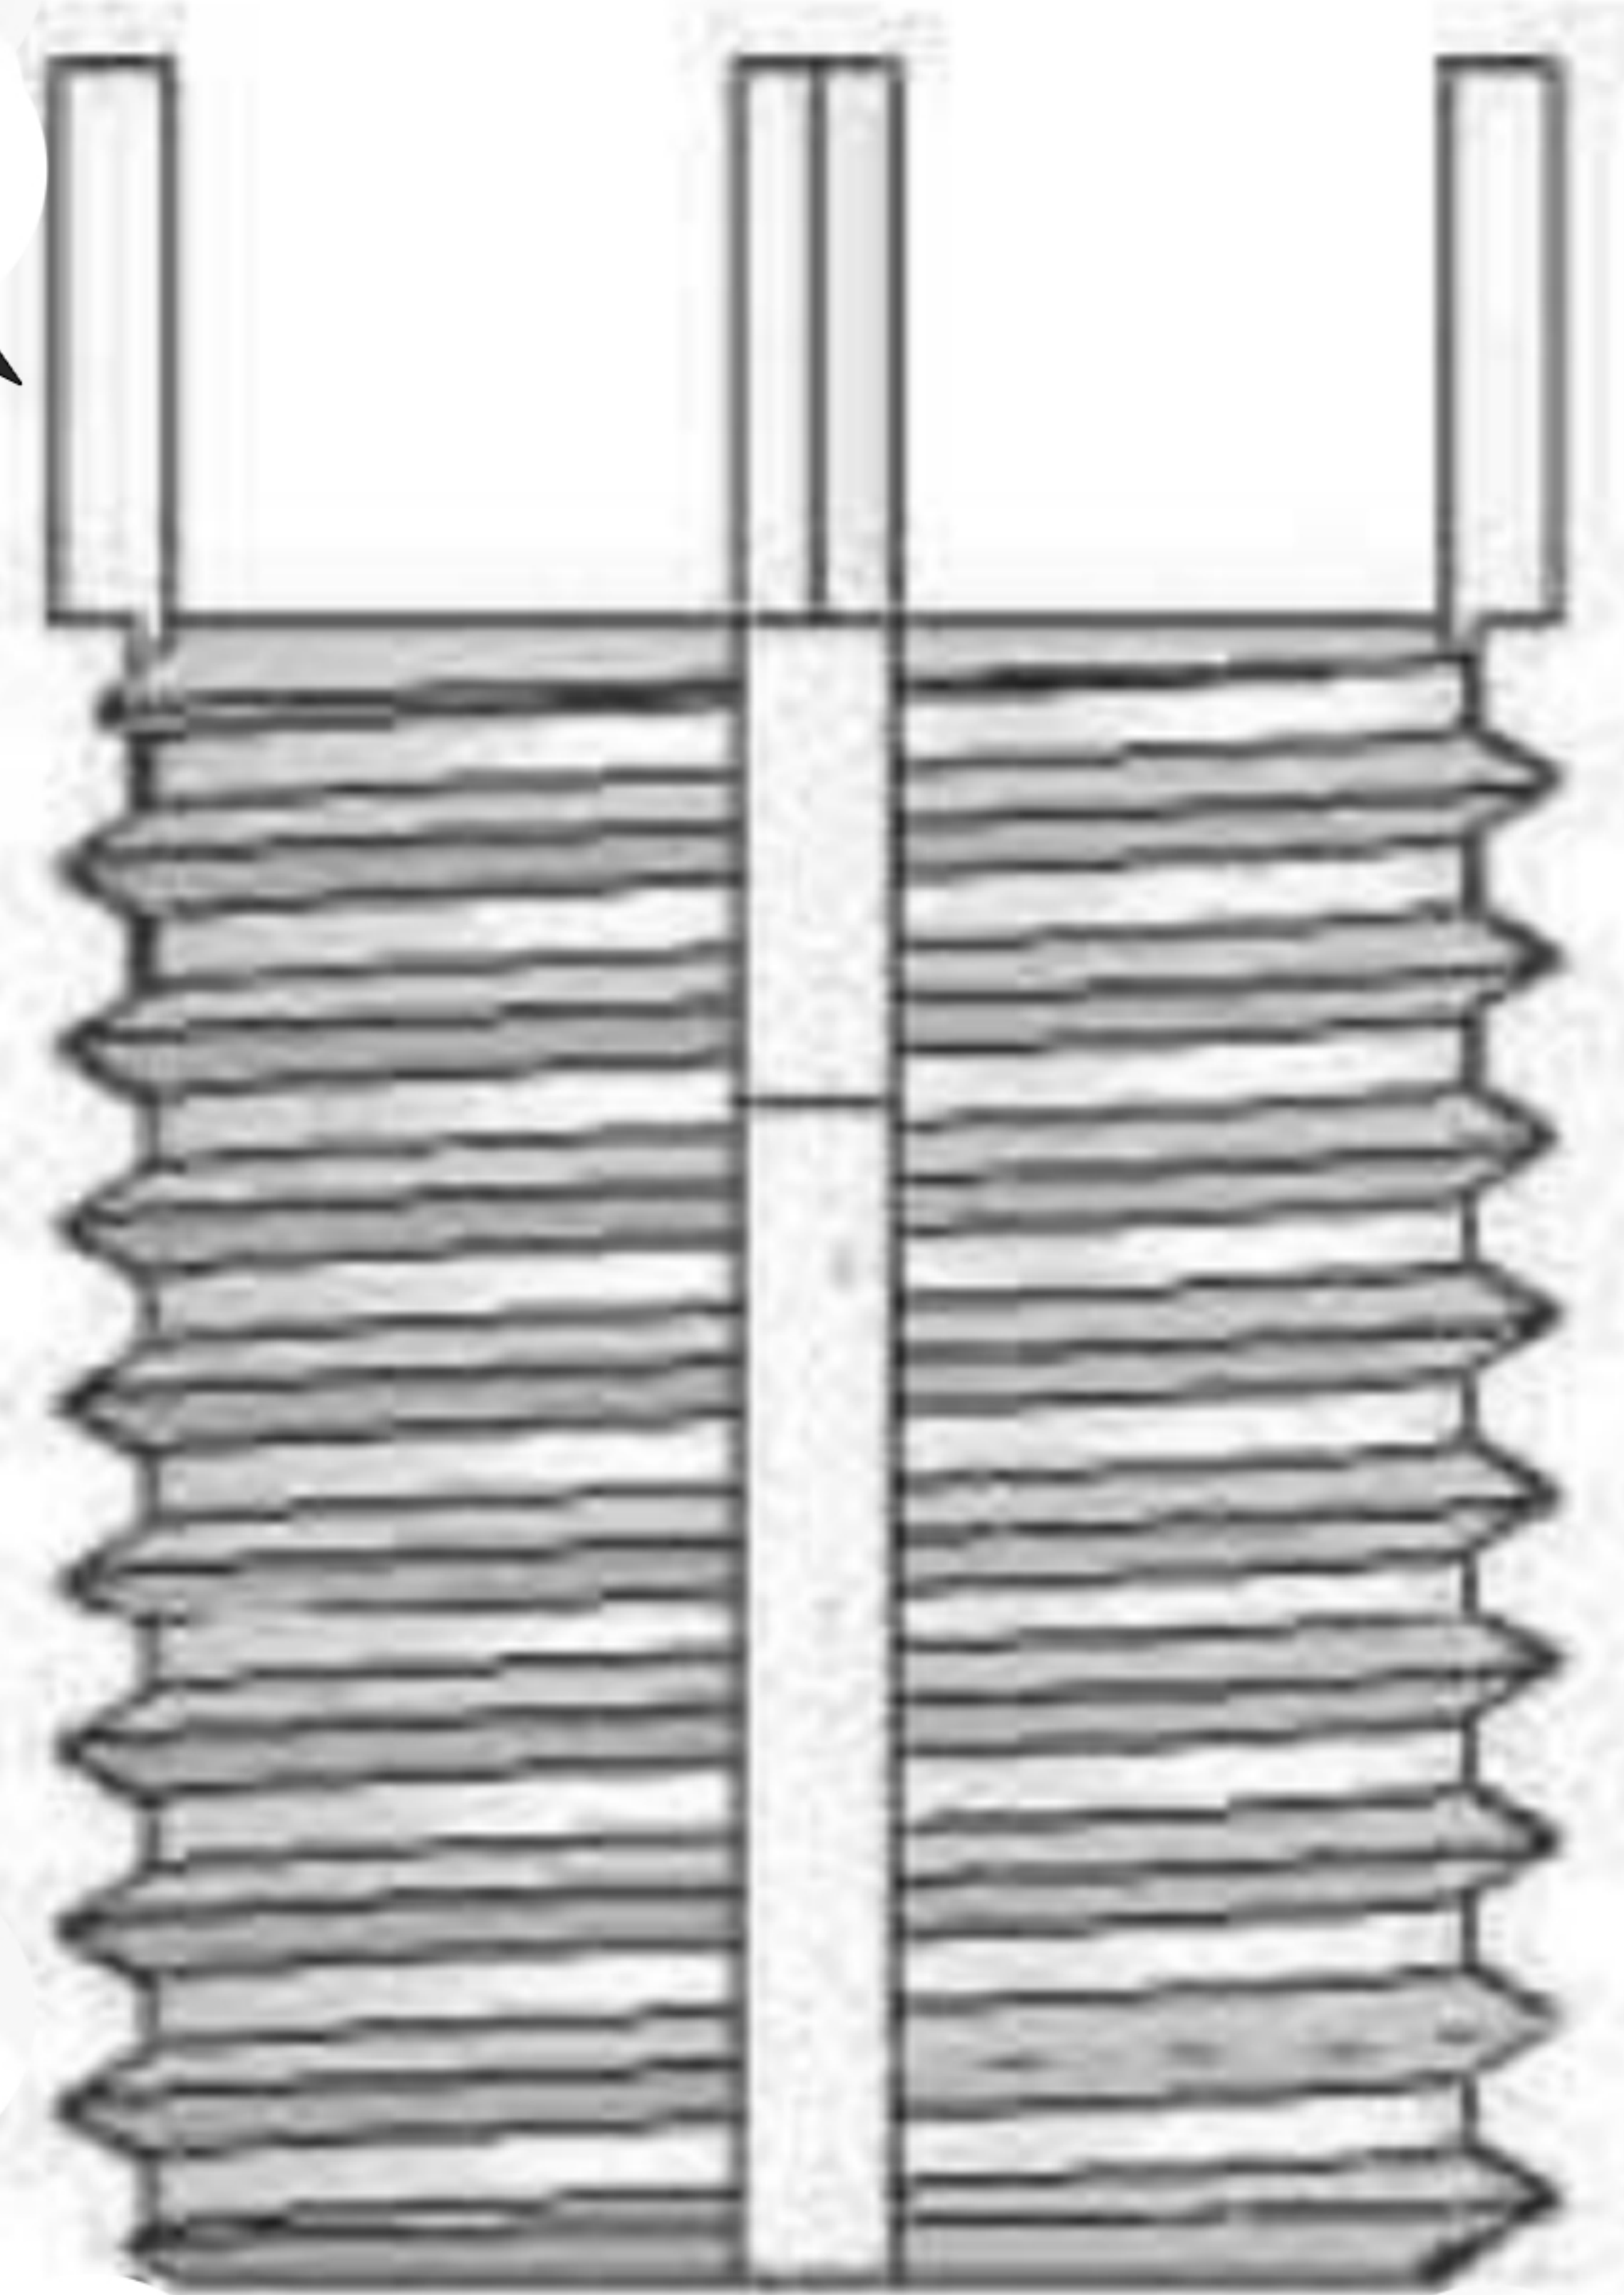

12mm

Suggested Drill Bit Size



0.4219 (27/64)

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

			NAME	DATE
			DRAWN	
			CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
			COMMENTS:	
NEXT ASSY	USED ON	TH. STANDARD: ISO Metric ACRONYM: ISO ROTATION: Right-Hand MATERIAL FINISH Stainless Steel Type 303		
		PART NUMBER 35L8C-65UR-12		
APPLICATION		DO NOT SCALE DRAWING		



**INDUSTRIAL HARDWARE**  
AND SPECIALTIES INCORPORATED

17-B KENTUCKY AVENUE  
PATERSON, NEW JERSEY 07503  
TEL: 973-684-4010 FAX: 973-684-3095  
email: TechSupport@industrialhardware.com  
www.industrialhardware.com

SIZE <b>A</b>	DWG. NO.	REV.
SCALE:1:8	WEIGHT:	SHEET 1 OF 1