


Key-Locking Solid Tappable Core

| | | REVISIONS | DATE | APPROVED |
|------|------|-------------|------|----------|
| ZONE | REV. | DESCRIPTION | | |
| | | | | |
| | | | | |



External Thread Pitch
M24 x 1.5

Key

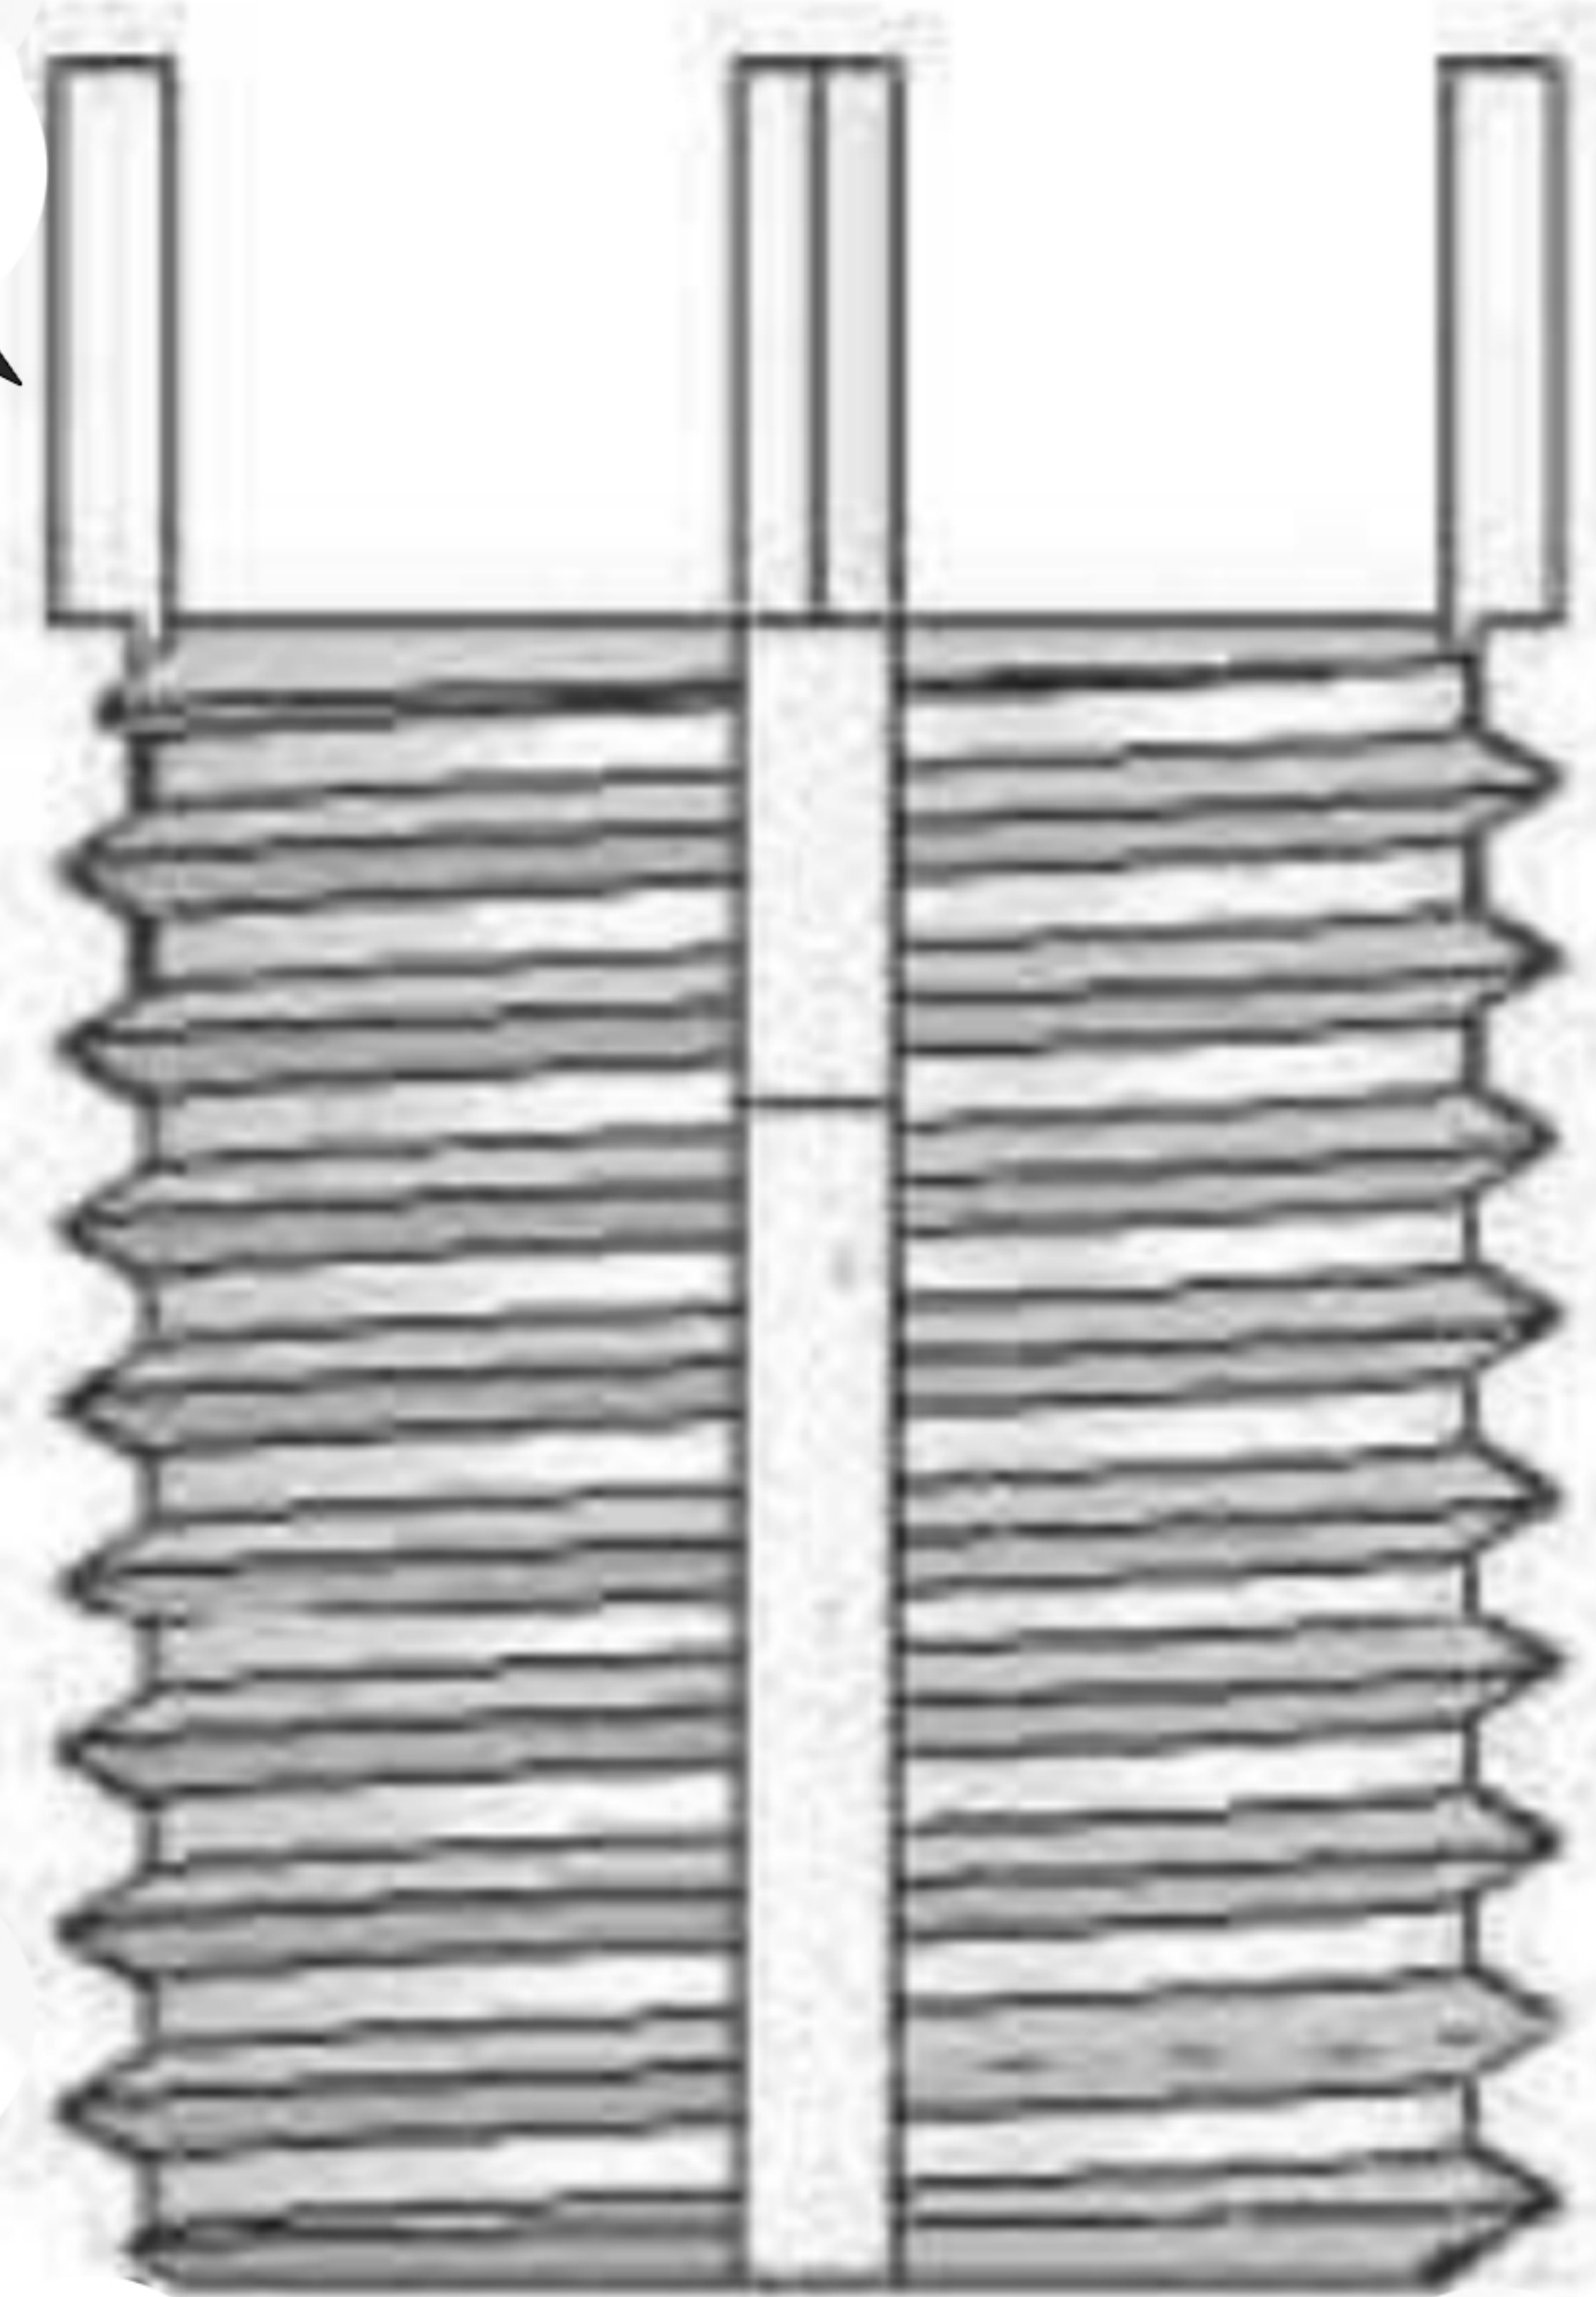

24mm

Suggested Drill Bit Size



0.8907 (57/64)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

| | | | | |
|-------------|---------|---|-----------|------|
| | | | NAME | DATE |
| | | | DRAWN | |
| | | | CHECKED | |
| | | | ENG APPR. | |
| | | | MFG APPR. | |
| | | | Q.A. | |
| | | | COMMENTS: | |
| NEXT ASSY | USED ON | TH. STANDARD: ISO Metric ACRONYM: ISO ROTATION: Right-Hand MATERIAL FINISH Stainless Steel Type 303 | | |
| | | PART NUMBER 35L8C-65UR-24 | | |
| APPLICATION | | DO NOT SCALE DRAWING | | |



**17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com**

| | | |
|------------------|----------|--------------|
| SIZE A | DWG. NO. | REV. |
| SCALE:1:8 | WEIGHT: | SHEET 1 OF 1 |