


Key-Locking Internal Locking

REVISIONS		DATE	APPROVED
ZONE	REV.	DESCRIPTION	



Key

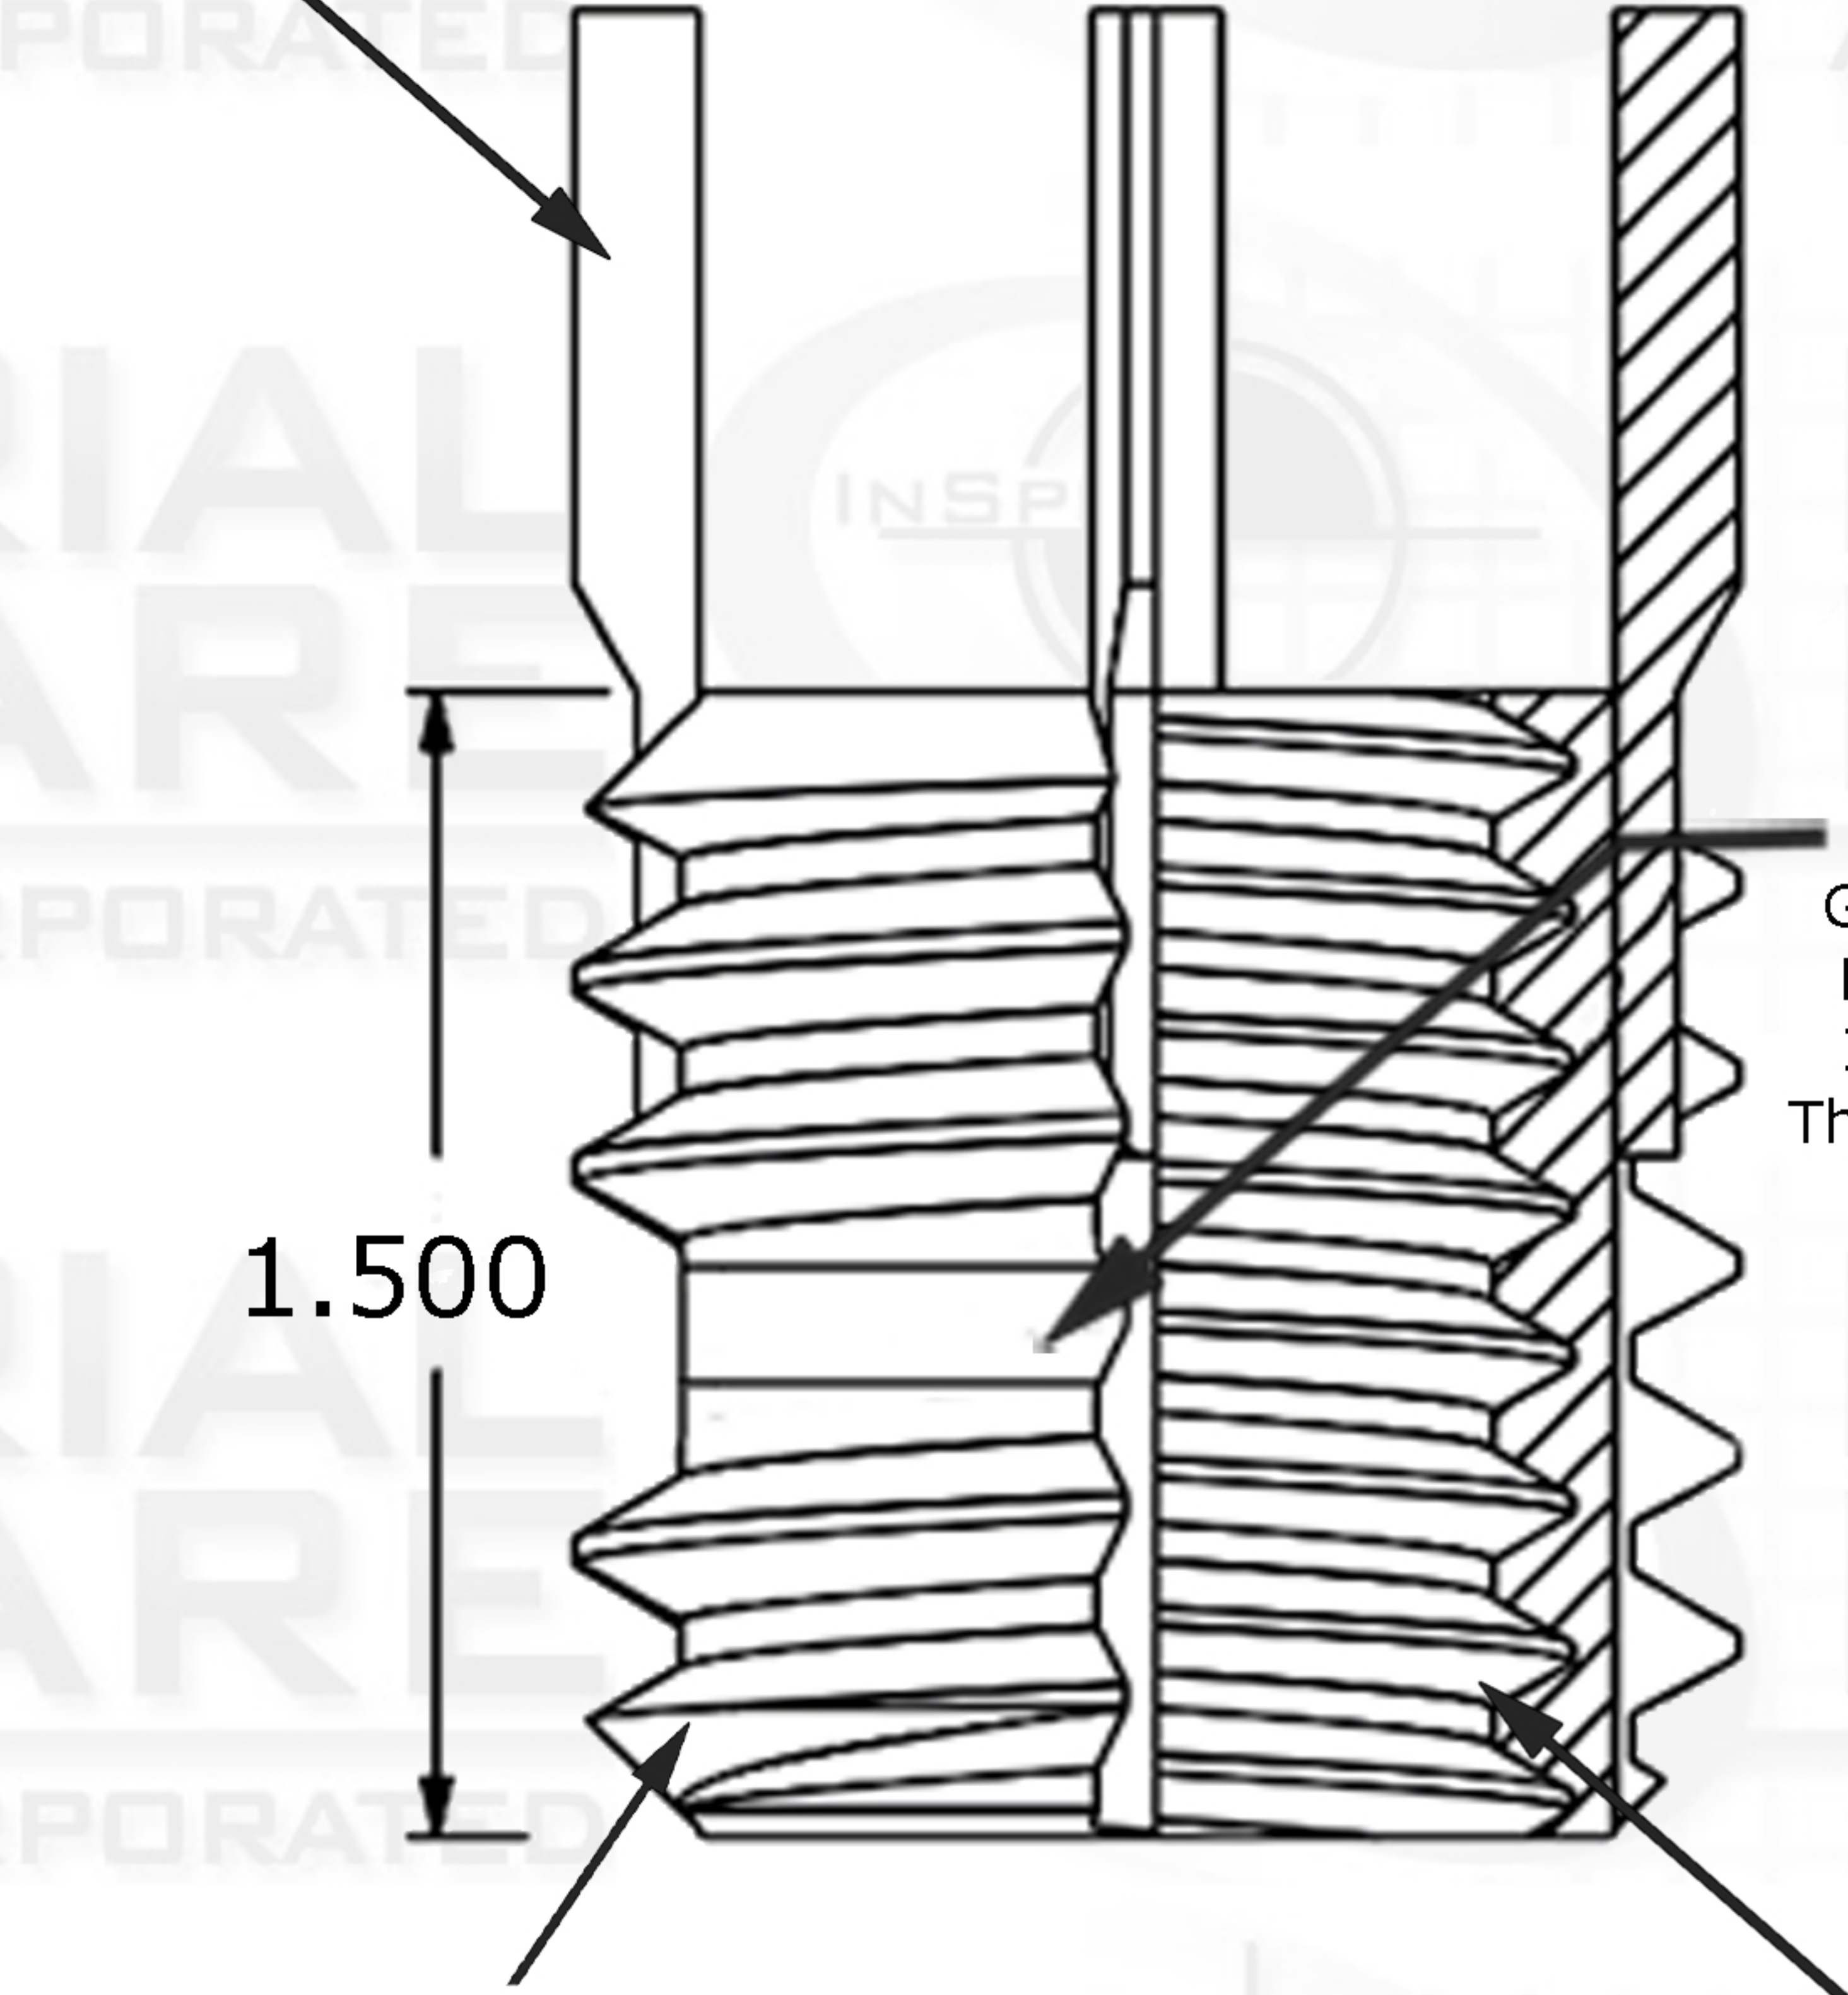

Swaged in Groove to Produce Internal Thread Lock

1.500

External Thread Pitch

1-3/8-12

Internal Thread Pitch

1-8

Suggested Drill Bit Size



1.3125 (1-5/16)

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES,INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES,INC. IS STRICTLY PROHIBITED.

NAME	DATE
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

Internal	TH. STANDARD : ANSI/ASME
	ACRONYM: UNC
	ROTATION: Right-Hand
External	TH. STANDARD : ANSI/ASME
	ACRONYM: UNF
	ROTATION: Right-Hand
	MATERIAL FINISH
	Stainless Steel Type A286
	PART NUMBER
	35L8C-7TGJ-100
	DO NOT SCALE DRAWING



17-B KENTUCKY AVENUE
 PATERSON, NEW JERSEY 07503
 TEL: 973-684-4010 FAX: 973-684-3095
 email: TechSupport@industrialhardware.com
 www.industrialhardware.com

SIZE	DWG. NO.	REV.
A		
SCALE:1:8	WEIGHT:	SHEET 1 OF 1