

## SwiftSert Free-Running

		REVISIONS		
ZONE	REV.	DESCRIPTION	DATE	APPROVED



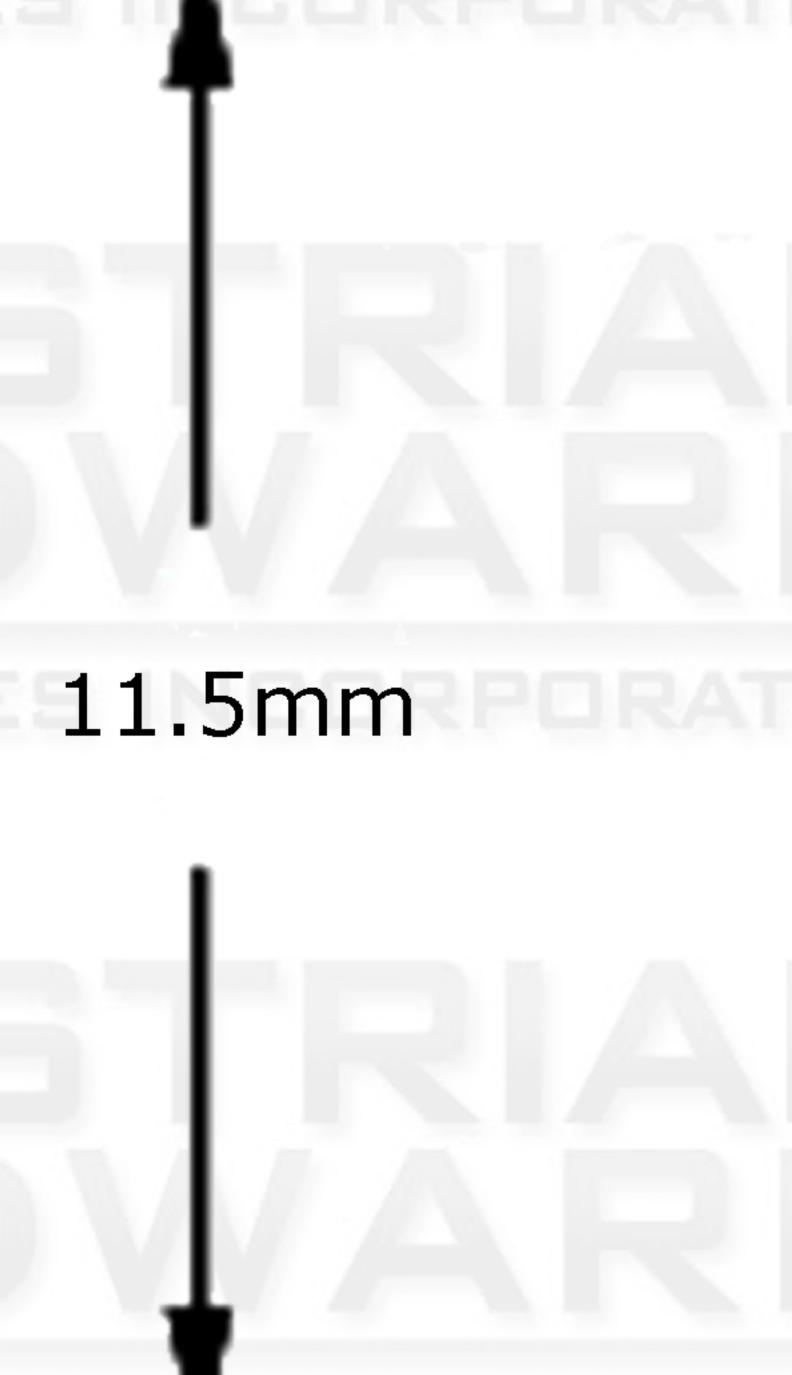

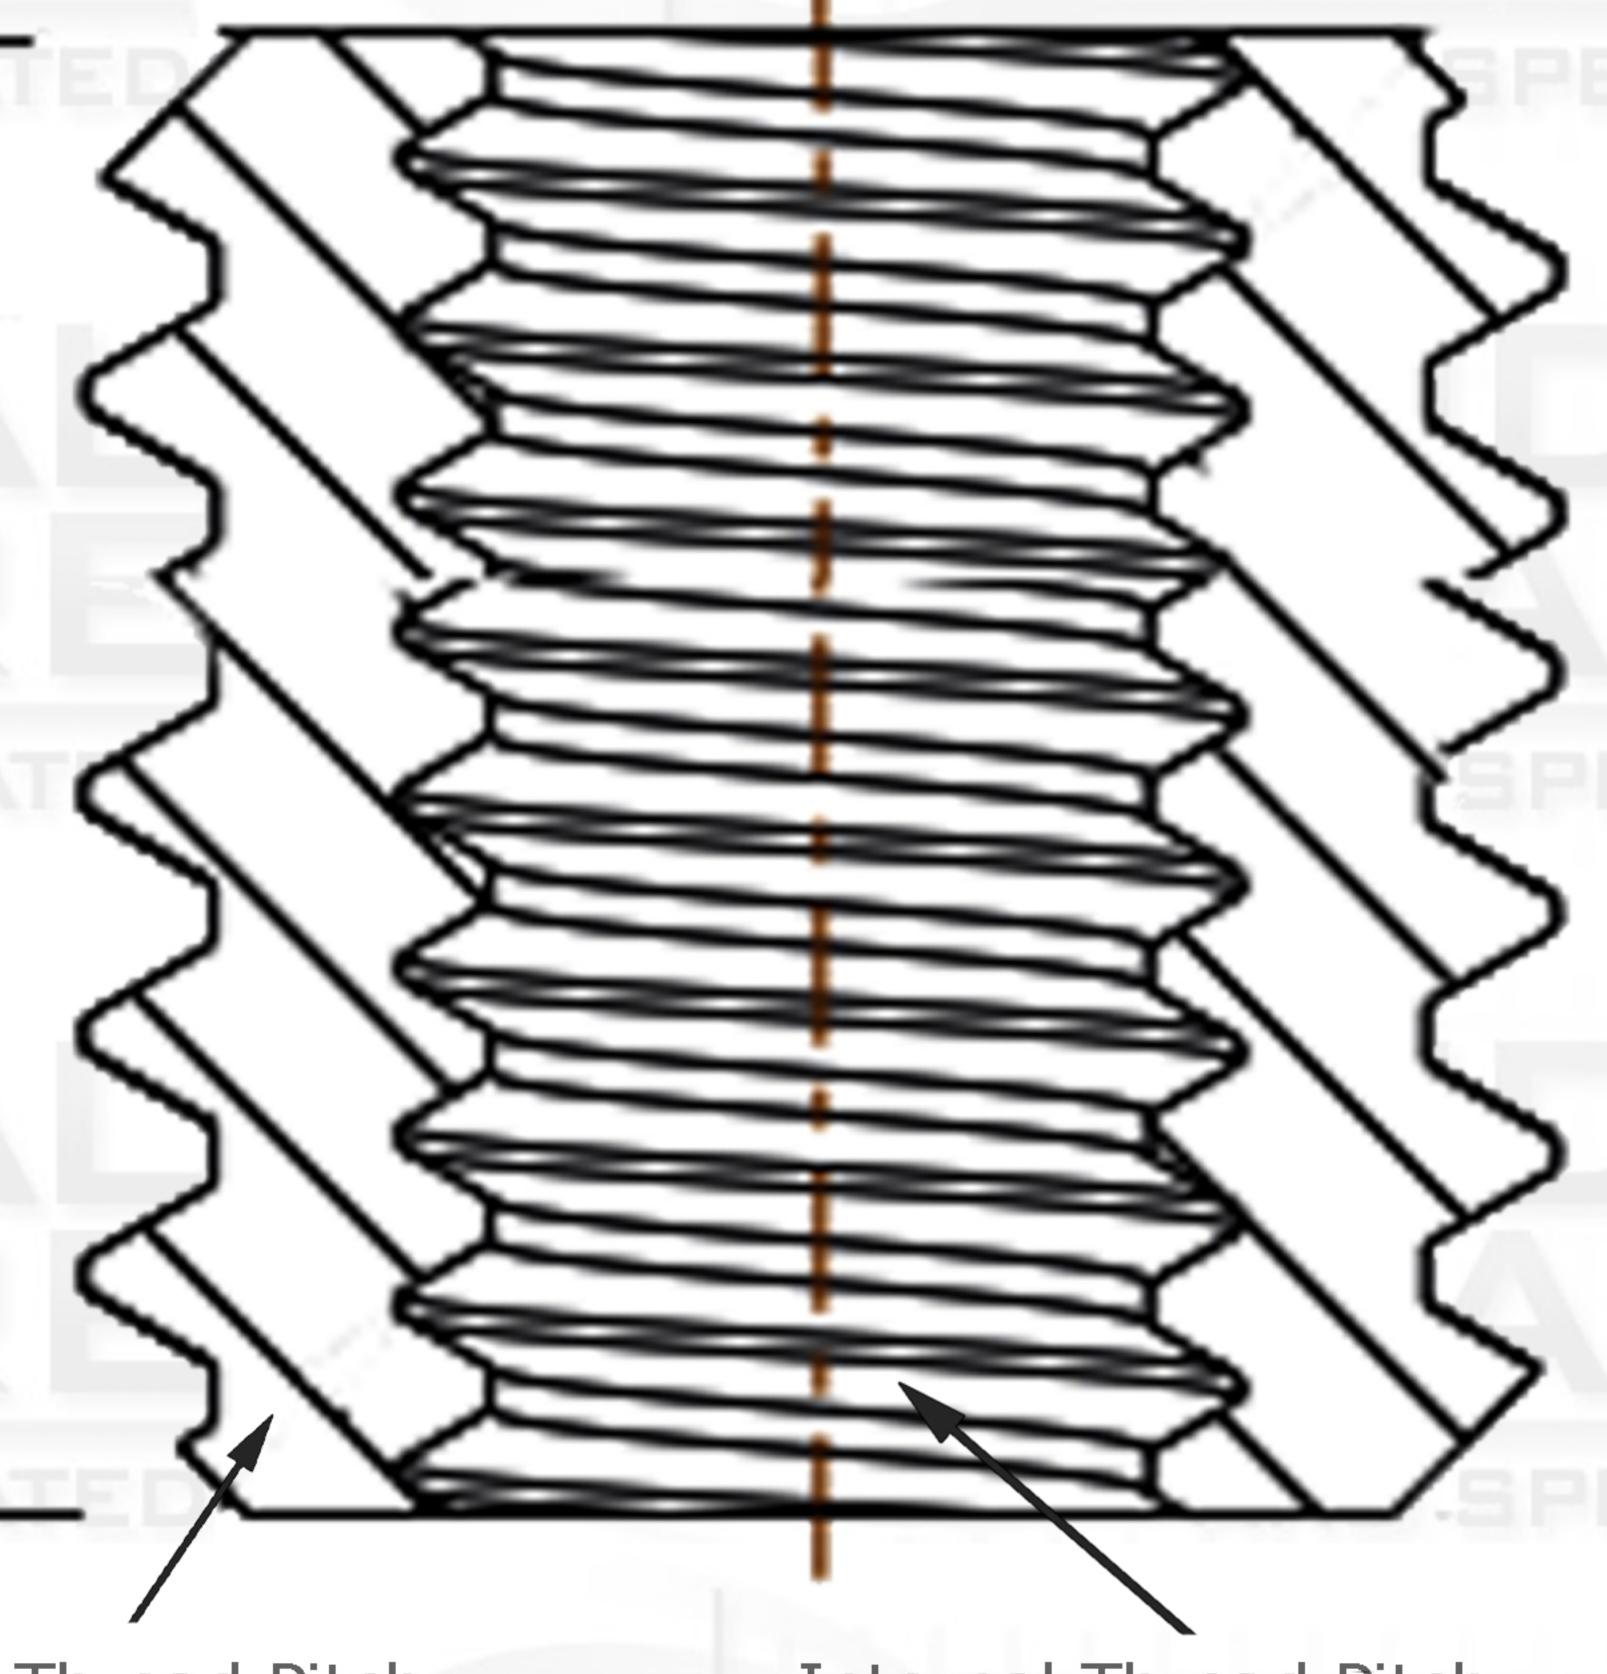

Suggested Drill Bit Size

0.6496 (16.5mm)

External Thread Pitch

M18 x 1.5

Internal Thread Pitch

 $M12 \times 1.25$ 

## PROPRIETARY AND CONFIDENTIAL

THIS DRAWING AND IT'S CONTENT IS THE SOLE PROPERTY OF INDUSTRIAL HARDWARE & SPECIALTIES, INC.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF INDUSTRIAL HARDWARE & SPECIALTIES, INC. IS STRICTLY PROHIBITED.

		Internal		NAME	DATE	
		TH. STANDARD : ISO Metric ACRONYMSpark Plug (ISO) ROTATION: Right-Hand	DRAWN			
			CHECKED			
		External	ENG APPR.			
		TH. STANDARD: ISO Metric	MFG APPR.			
		ACRONYM: ISO ROTATION: Right-Hand MATERIAL FINISH Carbon Steel 12L14	Q.A.			
			COMMENTS:			-
NEXT ASSY USED ON		PART NUMBER 35L9C-98XY-C12H-05				
APPLIC	ATION	DO NOT SCALE DRAWING				



17-B KENTUCKY AVENUE
PATERSON, NEW JERSEY 07503
TEL: 973-684-4010 FAX: 973-684-3095
email: TechSupport@industrialhardware.com
www.industrialhardware.com

SIZE	DWG. NO.				
Α					
SCALE:1:8		WEIGHT:	SHEET 1 OF 1		