

Drywall


ACCESS DOOR

The Drywall Access Door comes with standard 1/2 inch or 5/8 inch drywall installed in the door pan. Available in five standard sizes and three door styles for various application requirements.

FEATURES

PUSH LATCHING DOOR Once installed, this door gives the desired appearance architects look for. The door quickly and easily opens and closes with the magnetic push-catch latch.

SAFETY CORD For overhead applications, this safety cord supports the door while opening the unit.

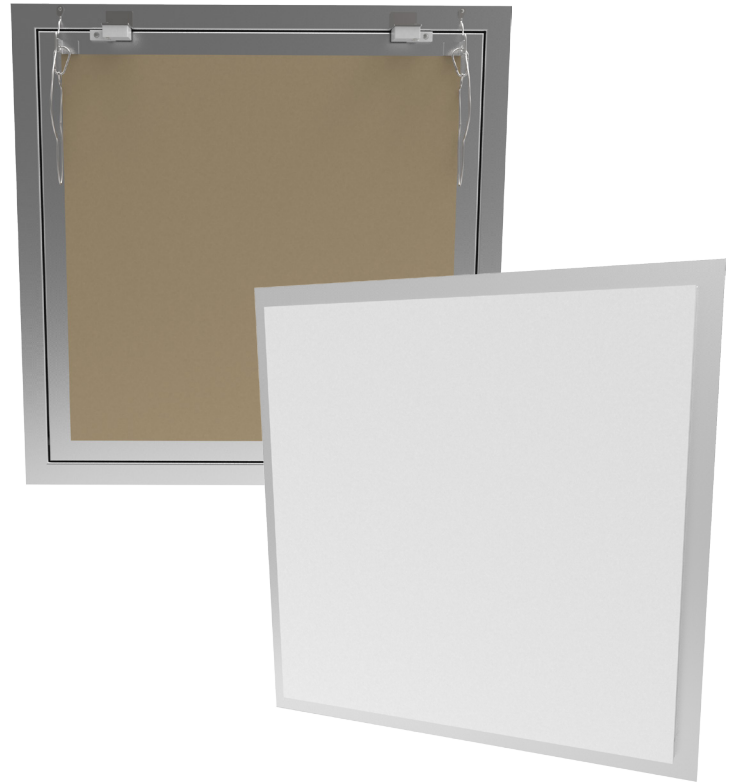

DETAILS

DOOR Welded Aluminum, Drywall Infill

FRAME Welded Aluminum

SIZE

- Min: 8 inches by 8 inches
- Max: 24 inches by 24 inches

INSTALLATION Ceiling or Wall

LATCH Push Latch


HINGE Welded Pin

FINISH Mill


APPLICATION



STB Pin Hinge



Removable Door



Tile

OPTIONS



Screwdriver Cam Latch



Key Operated Cam Lock



Double Door

ORDER GUIDE

BASE	APPLICATION	WIDTH	X	LENGTH	OPTIONS	INFILL
BRG			X			—
	B STB Pin Hinged	Standard Sizes (W x L)			C Screwdriver Cam Latch	500 1/2" drywall
	BR Removable Door	8" x 8"	16" x 16"	24" x 24"	D Double Door	625 5/8" drywall
	T Tile	12" x 12"	20" x 20"		L Key Operated Cam Lock	