

RC1762


Spring Hinge

Certifications:

- BHMA Certified, ANSI 4156.17, Grade 1

Application:

- ANSI K51071F
- Round corners - 5/8" (16 mm) radius

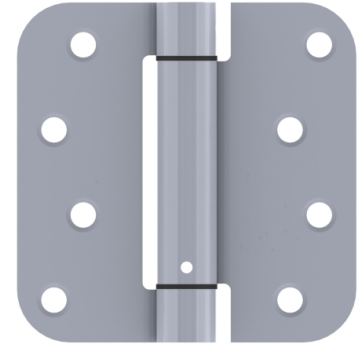

PRODUCT SPECIFICATIONS

MATERIAL:

- Stainless Steel

FINISHES:

- US32, US32D

PACKAGING:

- 2 pack with screws

NOTES:

- For maximum versatility use all spring hinges or a combination of spring hinges and ball bearing hinges. Do not use plain bearing hinges.
- Full spring tension may not be required on all hinges
- Strong wind conditions, drafts, carpeting drag, twisted/misaligned frames, or weatherstripping on doors may require additional spring hinges

PRODUCT SIZE OPTIONS

SIZE	RECOMMENDED MAX DOOR WEIGHT	SPRING HINGE	BUTT HINGE	SPRING HINGE LOCATION
4 in x 4 in (102 mm x 102 mm)	45 lbs.	1	2	Center
SIZE	HOLE COUNT	GAUGE OF METAL	SCREW SIZE (WOOD)	
4 x 4 (102 x 102 mm)	8	0.106	1 x 9 FH	