



# INSULATED EXTERIOR ACCESS DOOR

## Model MX-PL

For All Types of Construction

DATE



**KARP ASSOCIATES, INC.**  
 260 Spagnoli Road Melville, NY 11747  
 (631) 768-8300 - Phone  
 (631) 768-8350 - Fax

### SPECIFICATIONS

#### GENERAL SCOPE:

Access doors shall be Karp Type MX-PL as manufactured by Karp Associates, Inc., Melville, N.Y. Sizes shall be as indicated on the drawings.

#### CONSTRUCTION:

1. Frame shall be 18 gage galvanized steel.
2. Door shall be 18 gage galvanized steel.
3. Door shall be welded, watertight pan.
4. Frame shall be surrounded by 22 gage expansion casing bead with metal lath.
5. Gasketing between door and frame 3/8" wide by 1/8" thick closed cell neoprene gasketing.
6. Insulation shall be 1" thick polystyrene w/ 5.0 R-value @ 75 degree F temperature.
7. Hinge shall be continuous galvanized piano hinge.
8. Latches shall be Lift & Turn Compression Latch including cup sealing gasket finished in textured chrome. Keyed.
9. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel shall have No.



#### STANDARD SIZES (Special sizes on request)

DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF STUD LATCHES	SHIP WT. (LBS.)
12 x 12	12 3/8 x 12 3/8	1	6.3
18 x 18	18 3/8 x 18 3/8	1	10.5
24 x 24	24 3/8 x 24 3/8	2	16.0
30 x 22	30 3/8 x 22 3/8	2	18.0
30 x 30	30 3/8 x 30 3/8	2	27.0
36 x 24	36 3/8 x 24 3/8	2	24.0
36 x 36	36 3/8 x 36 3/8	2	36.0

\*Available in stainless steel

PROJECT DATA					
Project Name:					
Architect:					
Contractor:					
Agent/Customer Name:					
Tagging Instructions:					
Special Instructions:					

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

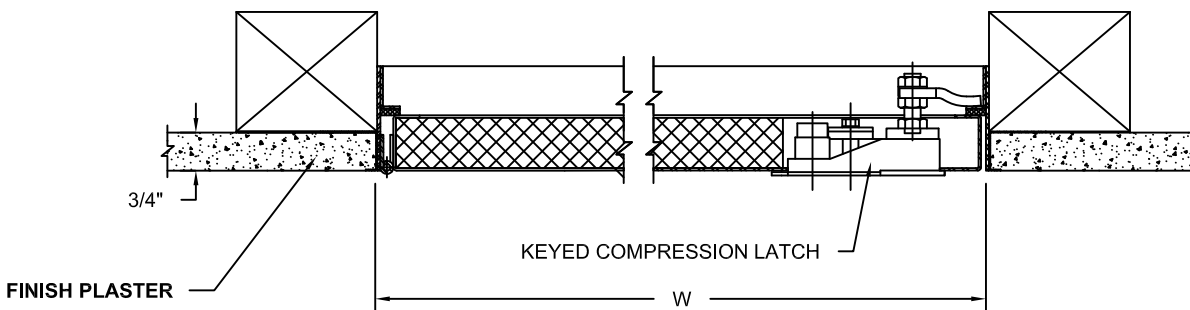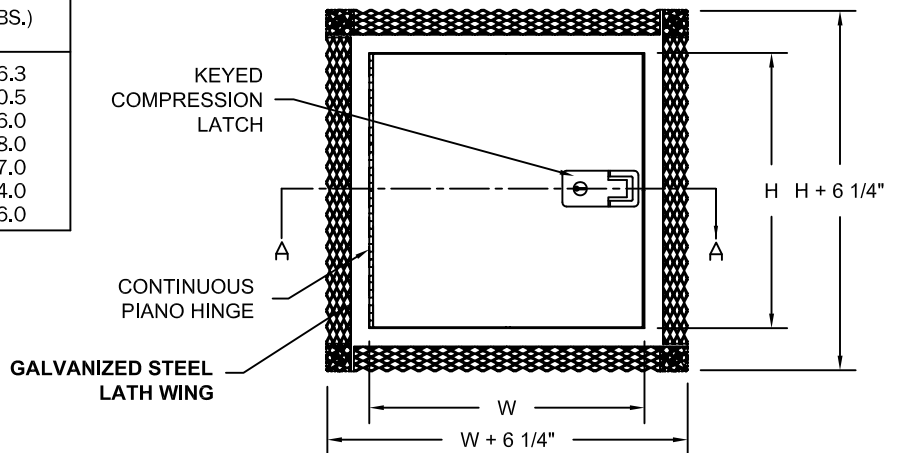

SECTION A-A



Made with Union Labor